

206V/208V INSTALLATION AND ASSEMBLY INSTRUCTIONS

WARNING: Before proceeding, read all instructions carefully to insure proper and safe installation.

WARNING: Risk of fire or electrical shock. Disconnect power before installing or servicing.


WARNING: Risk of electrical shock. High temperatures inside luminaire. Make certain line voltage corresponds with ballast's primary voltage. (See ballast label).

WARNING: All wiring to be performed per National Electrical Code and local code by a qualified electrician.


IMPORTANT - When lamping, always wear eye protection. Make sure area below fixture is clear.

Note: If lamp is installed dirty, operating hours and performance will significantly decrease.


IMPORTANT: Not every unit is identical! Placement of proper luminaire section (by length, emergency option, etc.) within each row is important. Refer to layout drawing to verify row identification, product location, and feed points!

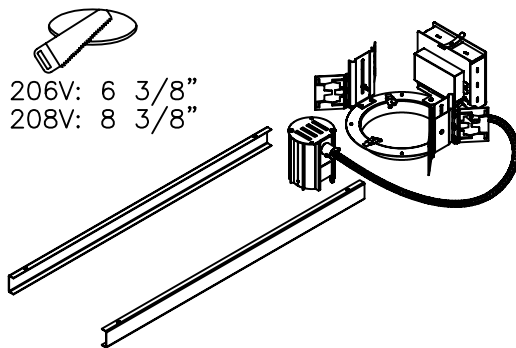


1.) INSTALL HANGER BARS (C-CHANNEL, NAILER BARS, CONDUIT, ETC...) (BY OTHERS OR CONSULT FACTORY)

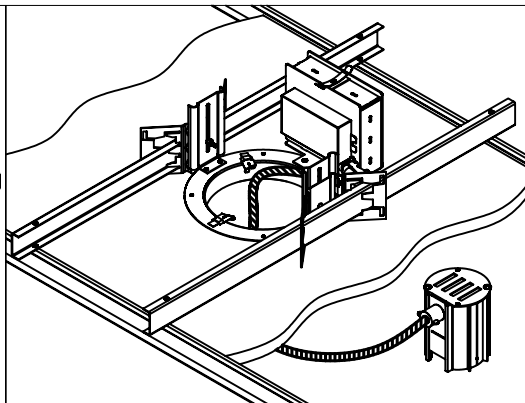


2.) SUPPORT FIXTURE BY THE HANGER BARS. SECURE HANGER BARS ACCORDING TO LOCAL BUILDING CODE. ADJUST BRACKETS SO BOTTOM OF FIXTURE FLANGE IS $\frac{1}{8}$ " ABOVE THE FINISHED CEILING HEIGHT.

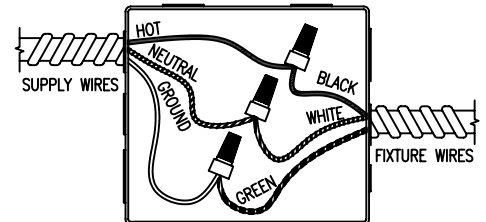

3.) MAKE SURE CIRCUIT IS NOT ENERGIZED AND MAKE SPLICES AS SHOWN. J-BOX IS SUITABLE FOR THRU WIRING (4 IN AND 4 OUT).

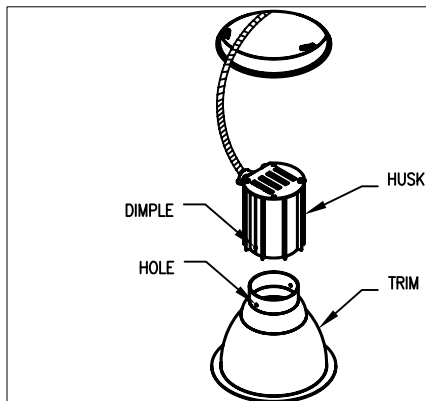

4.) ALIGN THE DIMPLE ON THE HUSK WITH THE HOLES IN THE REFLECTOR AND SNAP TOGETHER. SOCKET POSITION CAN BE RAISED OR LOWERED BY SQUEEZING THE SOCKET SPRING. (TRIMS ARE ORDERED AND PACKED SEPARATELY)

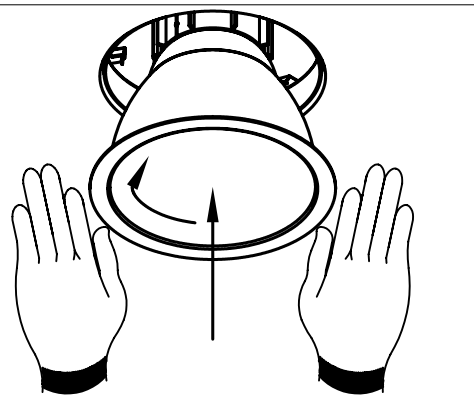

5.) USE GLOVES TO PREVENT FINGERPRINTS. INSTALL TRIM BY PUSHING STRAIGHT UP ON THE REFLECTOR FLANGE. ROTATE CLOCKWISE TO DRAW REFLECTOR FLANGE TIGHT AGAINST THE FINISHED CEILING. REFER TO RELAMP LABEL AND INSTALL PROPER LAMP/S. TO REMOVE THE REFLECTOR, ROTATE THE FLANGE COUNTERCLOCKWISE AND PULL DOWN.



LSI INDUSTRIES INC.
10000 Alliance Road
Cincinnati, Ohio 45242
(513)793-3200 Fax (513)793-0147
www.lsi-industries.com

A Company with a *Smart Vision*

Installation Questions?
Call LSI Field Service Department at:
1-800-436-7800 Ext. 3300 Fax 877-861-1368