



# LSI ABOLITE FALMOUTH

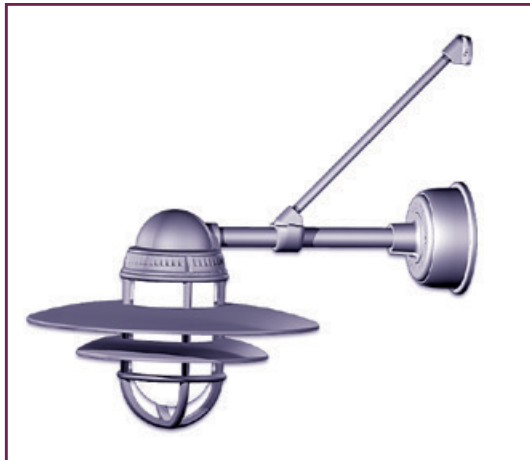


**PENDANT AND WALL MOUNT - BRACKETS AND HID AND CFL BALLASTS MUST BE ORDERED SEPARATELY**


## DIMENSIONS

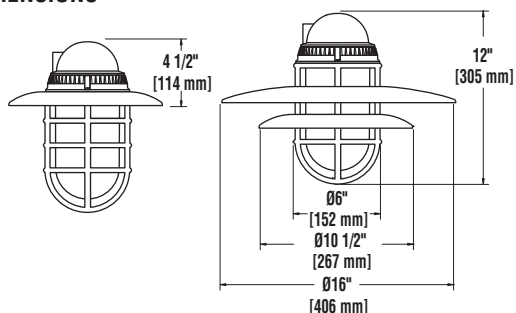

SWB & CLEVIS ARM MOUNT

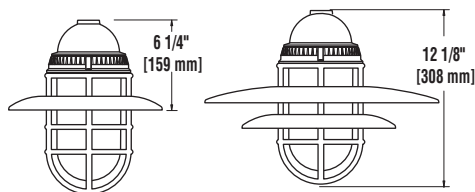

PENDANT MOUNT

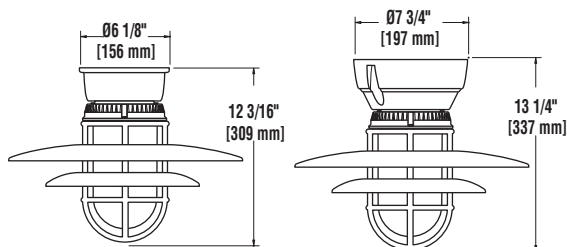

CFL & INC

EMH

**FIXTURE HOUSING** - Die cast aluminum.

**FINISH** - Available in High Gloss and Architectural Textured polyester powder finishes.

**LAMP OPTIONS** - 26, 32 and 42-Watt Compact Fluorescent Lamp (CFL) or low wattage, medium based Pulse-Start Metal Halide (PSMV) or Metal Halide (MH) lamps (available separately - consult factory). Incandescent is approved for up to 200-Watt maximum (lamp by other).

**MOUNTING** - Pendant mount is top entry and may be used with 3/4" rigid stems, or a variety of gooseneck and pole brackets, which must be ordered separately and includes CA5 cover (see accessory section). Wall mount is designed for side entry 3/4" rigid conduit arm brackets. Surface mounted unit designed to mount over 4" recessed outlet box (box by other). Note: Electronic CFL or EMH electronic ballast is supplied as part of the surface mount fixture, but must be ordered separately for the Pendant and Wall mount fixtures.

**GLOBE** - 4" linear prismatic glass globe is fully tempered and heat resistant.

**DISTRIBUTION** - Uplight/downlight.

**TRIM** - Spun heavy duty aluminum louvers. Louver/Guard assembly easily removed as a unit by loosening 1/8" hex set screw and quarter turning assembly leaving globe intact and accessibly for lamping.

**SOCKETS** - Smart CFL socket design accepts both 26/32W (GX24q-3 base) and 42W (GX24q4 base). Metal Halide and Pulse-Start Metal Halide sockets are porcelain medium base and pulse rated.

**BALLASTS** - All electronic ballasts are designed for 120-277v, +/-10%, 50/60 Hz. Designed to operate -30°C/-20°F with a Power Factor greater than 90%. Surface Fixtures include ballast. Pendant and Wall fixtures require Remote Ballast (specify separately). Postline ballast available for 26/32/42 CFL lamps only.

**ARRA**  
Funding Compliant

**UL** US  
LISTED  
wet location



All LSI ABOLITE products available as Wall, Pole, & Ceiling Mounted and can be used Indoors



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_


Catalog # \_\_\_\_\_

10/22/15

© 2015  
LSI INDUSTRIES INC.

# LSI ABOLITE FALMOUTH

## LUMINAIRE ORDERING INFORMATION



TYPICAL ORDER EXAMPLE: **FAL P 150 MH 120 GWT LV2 LDS96 FG**

Luminaire Prefix	Mounting	Rated Wattage	Light Source	Line Voltage	Finish	Louver Trim	Wiring	Options
FAL	S-Surface (integral ballast)	200	INC-Incandescent	120	MSV-Metallic Silver	10LV-Single 10" Louver 16LV-Single 16" Louver <sup>5</sup> LV2-One 16" Louver, one 10" Louver <sup>5</sup>		FG-Frosted Globe
		26/32/42	CFL - Single Compact Fluorescent	UE	GWT-Gloss White			
		50	EMH - Electronic Metal Halide	UE <sup>4</sup>	GBK-Gloss Black			
		70			GRD-Gloss Red			
	P-Pendant <sup>1</sup> W-Wall <sup>1</sup> (remote ballast required)	100			GPT-Textured Graphite		LDS96-8' prewired leads (P) (Wall comes with 36" Leads Standard)	
		200	INC-Incandescent	120	RUS-Textured Rust			
		26/32/42	CFL - Single Compact Fluorescent	UE	SVG-Satin Verde Green			
		50	MH - Metal Halide	120	SCP - Satin Copper			
		70		277	STQ - Satin Turquoise			
		100						
		150 <sup>2</sup>						
		175	PSMV - Pulse-Start Metal Halide <sup>3</sup>					

### FOOTNOTES:

- 1- If using with CWBM, CWBL, or gooseneck brackets, order P style mounting.  
2- Must use WTRB 150 MH MT WHT remote ballast.  
3- Consult factory for other light sources available for export.

- 4- If 347 is required, the WTRB or RB2 Remote Ballast is required.  
5- Not compatible with SWB3 or SWB6 accessory.

### USER INSTALLED ACCESSORIES

(Accessories are finished in gloss white powder, other optional colors are available. Specify alternate standard finish. Perf Baffles are Natural Aluminum Mill only.)

#### Remote Ballasts\*

CRB 26/32/42 CFL UE GWT - Wall Mounted CFL Remote Ballast for use with Contemporary Brackets only  
CRB 50, 70, 100 EMH UE GWT - Wall Mounted EMH Remote Ballast for use with Contemporary Brackets only  
PB 26/32/42 CFL UE GWT - Pole Mounted CFL Postline Remote Ballast  
SMB 26/32/42 CFL UE GWT - Surface Mounted CFL Remote Ballast with swivel for Pendant Mounting  
SMB2 50, 70, 100 EMH UE GWT - Surface Mounted EMH Remote Ballast with swivel for Pendant Mounting  
WMB 26/32/42 CFL UE GWT - Wall Mounted CFL Remote Ballast  
WMB2 50, 70, 100 EMH UE GWT - Wall Mounted EMH Remote  
WTRB 150, 175 PSMV MT WHT - Weather-tight Remote Ballast  
RB2 175 PSMV MT - Indoor Remote Ballast

\*Other Remote Ballasts (WTRB or RB2) are available.

#### Conduit Stems

ST 12 3 GWT - 3/4" x 12" Conduit Stem  
ST 18 3 GWT - 3/4" x 18" Conduit Stem  
ST 24 3 GWT - 3/4" x 24" Conduit Stem  
ST 36 3 GWT - 3/4" x 36" Conduit Stem  
ST 48 3 GWT - 3/4" x 48" Conduit Stem

#### Clevis Wall Mount Arm Brackets

CMA 12 3 GWT - 12" (305mm) Clevis Bracket for Wall Mount Style  
CMA 18 3 GWT - 18" (457mm) Clevis Bracket for Wall Mount Style

**Note:** Assembly includes Clevis, 3/4" Stem and CA5 Wall Plate. Fixture and WMB/WMB2 extra, order separately.

#### Contemporary Wall Brackets

CWBM 1 GWT - 20" tall x 14" deep Medium Contemporary Wall Mount Stem and Bracket; Gloss White  
CWBL 1 GWT - 23" tall x 20" deep Large Contemporary Wall Mount Stem and Bracket; Gloss White

**Note:** Order Pendant Mount Fixture and CRB separately

#### Straight Wall Brackets

SWB 3 3 GWT - 3/4" x 3" (19mm x 76mm) Stem & Wall Plate<sup>5</sup>  
SWB 6 3 GWT - 3/4" x 6" (19mm x 152mm) Stem & Wall Plate<sup>5</sup>  
SWB 12 3 GWT - 3/4" x 12" (19mm x 305mm) Stem & Wall Plate  
SWB 18 3 GWT - 3/4" x 18" (19mm x 457mm) Stem & Wall Plate  
SWB 24 3 GWT - 3/4" x 24" (19mm x 610mm) Stem & Wall Plate


**Note:** Designed for mounting over recessed 4" (102mm) Octagon box (box by other).

#### Perf Baffles Surface and Wall Mounting Only

PR4E - Perforated metal ring diffuses and shields lamp image

PR4E-180 - Half perforated metal ring provides a wall wash behind fixture Natural aluminum

**Note:** Baffles are restricted to 70 Watt max. on Surface Mount EMH and 100 Watt max. on Pendant and Wall Mount.



Clevis Arm Bracket  
and WMB Ballast



SWB Bracket



CWB Bracket



CRB 26/32/42 CFL  
Remote Ballast For Wet  
Locations



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_

Catalog # \_\_\_\_\_

10/22/15

© 2015  
LSI INDUSTRIES INC.