


LSI ABOLITE HARBOR



DIMENSIONS

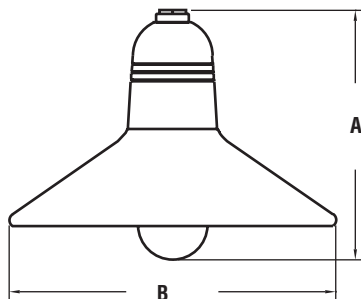

Fixture	Height (A)	Diameter (B)	Weight (kg/lbs.)
HBR 15"	15-1/4" (381mm)	15" (381mm)	3 kg/6.5 lbs.
HBR 20"	15-1/4" (381mm)	20" (508mm)	3.2 kg/7 lbs.

FINISH - Available in Architectural Textured or High Gloss finish.

LAMP OPTIONS - Single Compact Fluorescent Lamps, High Intensity Discharge, and Incandescent lamps. CFL and HID lamps available – order separately; Incandescent lamps by other.

MOUNTING - Cast hub tapped for 3/4" NPT conduit. Available factory pre-wired with 96" leads (approved for wet locations). Choose from a variety of brackets (see accessory section). Also available with white or black cord set and matching canopies, coiled cords and SWAG options (listed for damp locations).

REFLECTOR - Heavy-duty, spun aluminum.

SOCKETS - Incandescent (rated 660 Watt/600 Volt) and HID (4KV pulse rated) are medium base porcelain. Compact Fluorescent 26/32/42 Watt sockets feature smart push-pull thermoplastic design for ease of lamping.

GLOBE - Prismatic shatter-resistant and heat-resistant glass. (Frosted globe available as an option).

BALLASTS - Compact Fluorescent: factory pre-wired in neck, high power factor electronic ballast will operate 26/32/42 Watt lamps. CFL lamps are rated for -18° C / 0° F. HID version: require remote high power factor ballasts-must be ordered separately.



ARRA
Funding Compliant

All LSI ABOLITE products available as Wall, Pole, & Ceiling Mounted and can be used Indoors

TYPICAL ORDER EXAMPLE: **HBR 26/32/42 CFL UE MSV AL20 PG4 LDS96WL**

Luminaire Prefix	Lamp Wattage	Light Source	Line Voltage	Fixture Finish	Reflector Size	Globe	Mounting	Field Installed Accessories
HBR	26/32/42	CFL-Single Compact Fluorescent	UE 347	BRU - Brushed, Anodized Aluminum ³	AL15 - 15" Aluminum Reflector	PG4 - 4" Clear Prismatic Glass Globe	LDS96WL - 8' prewired leads. Includes 3/4" top mounting casting. Labeled for "wet location" mounting. Not available w/BRU finish.	Wire Guards
	200	INC-Incandescent	120	GWT - Gloss White	AL20 - 20" Aluminum Reflector		LDS96 - 8' prewired leads. Includes 3/4" top mounting casting. Use w/BRU finish. ³	Remote Ballasts (HID)
	50 70 100 150 ¹	MH- Metal Halide	120 277	MSV - Metallic Silver		PG4F - 4" Frosted Prismatic Glass Globe	CA120WHT - 10' prewired white cord set and canopy. ³	Wall Brackets
	175 ²	PSMV - Pulse-Start Metal Halide		GBK - Gloss Black			CA120BLK - 10' prewired black cord set and canopy. ³	Poles & Pole Brackets
				GRD - Gloss Red			CA120WHTS - 10' prewired white cord set and canopy with SWAG option. ³	
				GPT - Textured Graphite			CA120BLKS - 10' prewired black cord set and canopy with SWAG option. ³	
				RUS - Textured Rust				
				SVG - Satin Verde Green				
				SCP - Satin Copper				
				STQ - Satin Turquoise				

1 - 150 MH is available with LDS96WL mounting only. 2- Must use reduced envelope lamp. Consult factory for other light sources available for export. 3- For indoor use only.



Project Name _____ Fixture Type _____

Catalog # _____

10/22/15

© 2015
LSI INDUSTRIES INC.