




LED Recessed Lighting

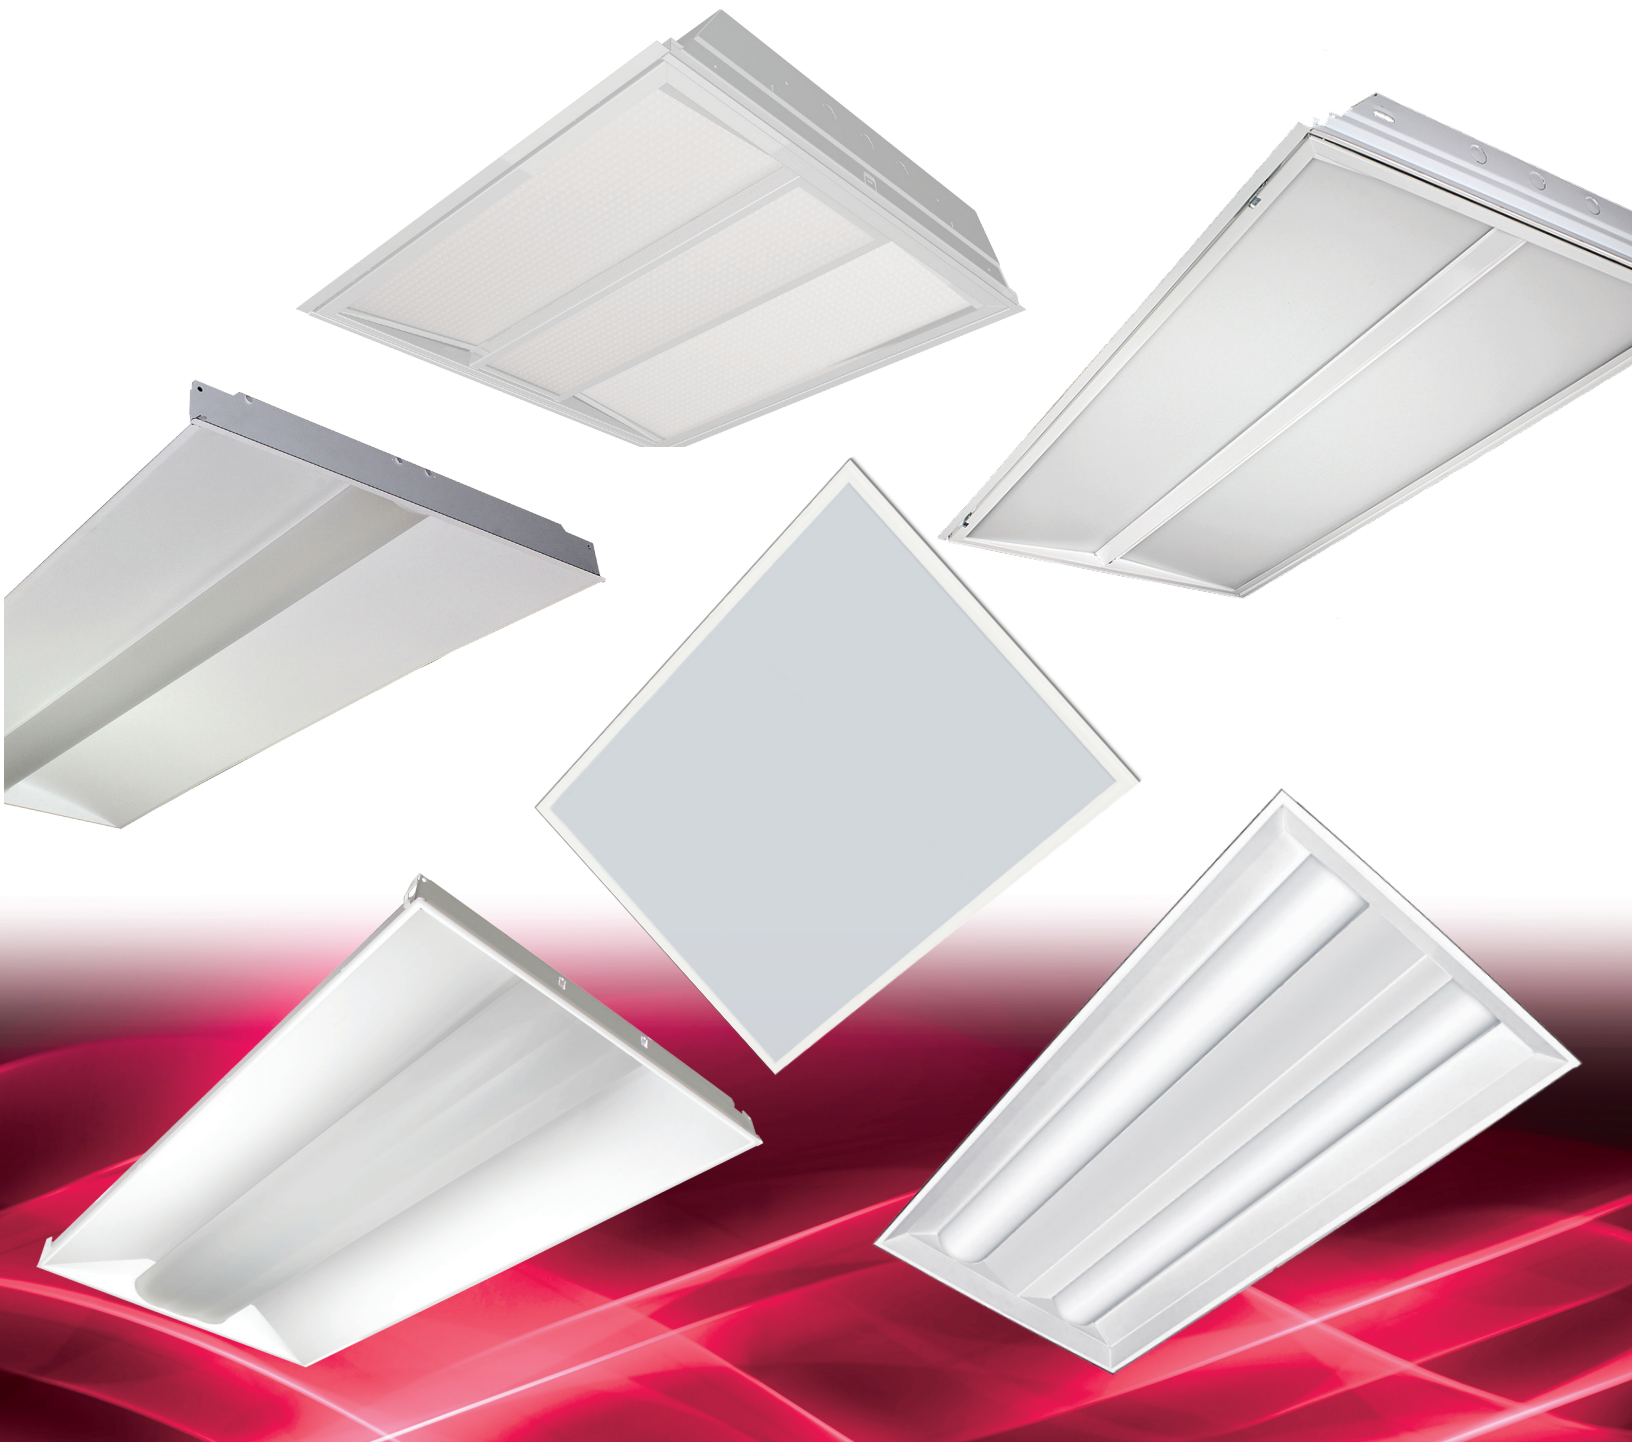

LED Recessed Lighting

DIRECT/INDIRECT								FRAMED LENS				LOUVERED
SERIES	LPASC	LPEC	LPRT	ASC	SLI	PEC-RAD	SHPEC	SFP	GA	GA TSLR	Triumph	LEL
												
DESCRIPTION	Low Profile Direct/Indirect Lighting	Direct/Indirect Lighting Low Profile for Shallow Plenum Applications	Lowest Profile Direct/Indirect Lighting Proprietary Low Profile Lens	Dual Lenses Soft Even Illumination from Ceiling to Floor Low Profile Lens	Indirect Side Lit Diodes Open Cavity No Lens	Direct/Indirect Lighting Balanced Illumination / Low Angle Brightness Control	Low Profile Telescoping Housing Allows Installation in Tightest Plenums Tri-Radius Lens Does Not Extend Below Ceiling Line	Edge-Lit Flat Panel Light	Low Profile Flat Prismatic P12 Lens Steel Door Frame	Low Profile High Diffusion Opal Acrylic Split Angled Lens Steel Door Frame	Specification Grade Recseed Troffer Deliver Even illumination and provides Maximun Visual, Comfort	Low Profile Deep Louver for Improved Cutoff
SIZE	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2, 1 x 4	2 x 4, 2 x 2	2x4, 2x2	2 x 4
COLOR TEMPERATURE (Nominal)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	50 - (5000K) 40 - (4000K) 35 - (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)	50 - (5000K) 40 - (4000K) 35 - (3500K) 30 - (3000K)	Cool White (5000K) Neutral White (4000K) Warm White (3500K)
LUMEN (Range)	2 x 4: 3525 - 5185 2 x 2: 2810 - 4055 1 x 4: 3075 -4330	2 x 4: 3530 - 7080 2 x 2: 2880 - 4870 1 x 4: 3050 - 5125	2 x 4: 3515 - 7110 2 x 2: 2820 - 5060 1 x 4: 2930 - 5110	2 x 4: 4630 - 6855 2 x 2: 2875 - 4175 1 x 4: 2890 - 4095	2 x 4: 4004 - 6012 2 x 2: 2408 - 3517	2 x 4: 4860 - 10925 2 x 2: 3490 - 5370 1 x 4: 2950 - 4175	2 x 4:3470 - 7030 2 x 2: 1390 - 4005	1x4 - 3808-4000 2x2 - 2953-3163 2x4 - 5000-5338	2 x 4: 5160 - 9595 2 x 2: 3027 - 4825 1 x 4: 3215 - 5070	2 x 4: 4820 - 9940 2 x 2: 2805 - 5155	2 x 4: 4047 - 9299 2 x 2: 2483- 4650	2 x 4: 5050 - 7575
LPW (Max)	2 x 4:118 2 x 2:118 1 x 4: 127	2 x 4:118 2 x 2:118 1 x 4: 125	2 x 4: 122 2 x 2: 124 1 x 4: 122	2 x 4: 126 2 x 2: 117 1 x 4: 115	2 x 4: 108 2 x 2: 102	2 x 4: 132 2 x 2: 119 1 x 4: 128	2 x 4: 117 2 x 2: 118	1x4 - 100 2x2 - 105 2x4 - 107	2 x 4: 114 2 x 2: 109 1 x 4: 115	2 x 4: 118 2 x 2: 122	2 x 4: 110 2 x 2: 110	2 x 4: 136
INPUT WATTS (Range)	29-46	29-46	27-58	30-54	29-59	27 - 86	14-60	1x4 - 40 2x2 - 30 2x4 - 50	29-88	29-88	27 - 84	45-61
CRI	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥80	≥85
HOUSING DEPTH	2 1/2"	3 1/8"	2 1/4"	3 1/2"	3 3/8"	5 1/16"	2 1/8"	1 11/16"	3 1/4"	3 1/4"	4"	4"
DIMMING	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CONTROLS	AirLink™ Enabled	AirLink™ Enabled	Consult Factory	AirLink™ Enabled	AirLink™ Enabled	Consult Factory		No	Consult Factory		AirLink™ Enabled	Consult Factory
DLC					No	No	No				No	No
WARRANTY	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years

For a list of the specific products in this series that are DLC listed, please consult the LED section of our website or the Design Lights website at www.designlights.org.



About AirLink™ Controlled Lighting

LSI AirLink™ is a new family of controlled LED luminaires featuring integrated Lutron® Clear Connect™ Wireless Technology. Integrated motion and light level sensors ensure maximum energy savings, quality and comfort, while wireless controls enable occupants to easily operate individual or groups of fixtures. AirLink™ boasts easy and fast installation, quick setup and can be used to meet stringent energy code requirements and support LEED certification. Please refer to the matrix to see which luminaires are AirLink™ enabled.



About LSI Industries, Inc.

LSI is a leading manufacturer and supplier of IMAGE-enhancing interior & exterior LED Lighting Fixtures, Lighting Controls, Poles/Brackets and Graphics. LSI utilizes its advanced technological capabilities to develop and sell energy-efficient, innovative products across commercial, industrial, banking, petroleum, quick serve restaurant, and automotive segments, to name a few. Operations span the globe, with concentrations in North America, Latin America and Australia. LSI is traded on NASDAQ under LYTS and can be visited online at <http://www.lsi-industries.com>

