



Chambray 5083
NCS S 4000-N

w/r 5083
LRV 33.5



Steelwool 5082
NCS S 5502-Y

w/r 5082
LRV 21.9



Linen 5081
NCS S 2005-Y50R

w/r 5081
LRV 45.6



Light Concrete 5087
NCS S 4005-G80Y

w/r 5087
LRV 33.3



Dark Concrete 5089
NCS S 5502-Y

w/r 5089
LRV 23.2




Cement 5088
NCS S 3005-Y20R

w/r 5088
LRV 41.9




Frosted Silver 5084
NCS S 1000-N

w/r 5084
LRV 63.2

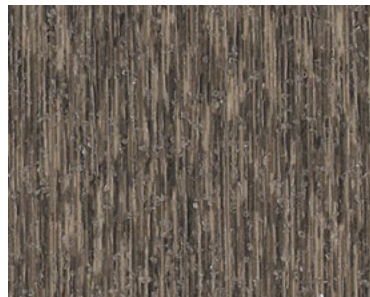


Brushed Titanium 5086
NCS S 7005-Y20R

w/r 5086
LRV 13.7

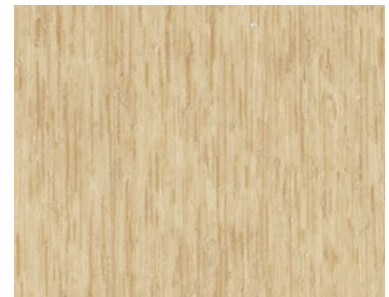

Sand Grain 5085
NCS S 3010-Y10R

w/r 5085
LRV 45.3

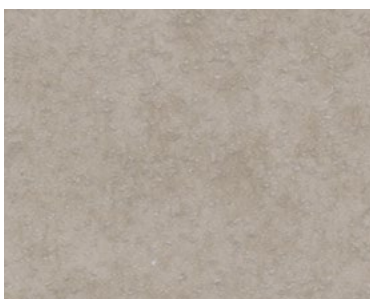


Flagstone Grey 5091
NCS S 4005-Y50R

w/r 5091
LRV 35.0



Clay Stone 5092
NCS S 5005-Y80R

w/r 5092
LRV 24.7

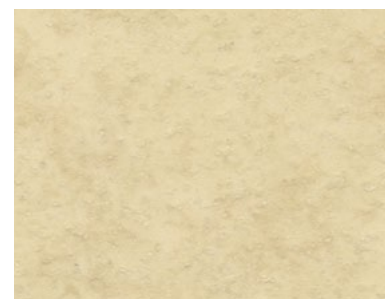

Crema Nova 5090
NCS S 2010-Y10R

w/r 5090
LRV 53.6

w/r = weld rod NCS = Natural Colour System LRV = Light Reflectance Value



100% RECYCLABLE
10% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com



Sustainable Slip Resistance
throughout product's guaranteed life

RRL Pendulum Wet Test - HSE Compliant