

Style Code PRF

Specifications


Construction	Tip-Sheared Loop Pattern
Yarn Content	Avalar® RE Nylon
Dye Method	Solution Dye
Machine Gauge	1/10 in
Stitch Count	12.2 S.P.I
Average Density	6,857
Finished Pile Thickness	0.168 in
Yarn Weight Tufted	32 oz/yd ²
Secondary Backing	Woven Polypropylene
Width	12 ft
Pattern Repeat	12" W x 8.4" L
*Custom Minimum	1,000 yd ²

Performance

Static Control	Less Than 3.5 K.V. Step
Flame Resistance	Passes (DOC FF-1-70)
Radiant Panel	Class 1 (ASTM E-648)
Smoke Density	Less Than 450 (ASTM E-662)
Soil Resistance	Commercial Anti-Soil Protection
Stain Resistance	Commercial Stain Protection
CRI Green Label Plus	Certification# GLP7078
Environmental	Proud member of the EPA's Green Power Partnership
Odor Reduction	Puralex®

Warranties

Wear	10 Year Limited
Stain	Lifetime Limited
Static	Lifetime Limited
Colorfastness	Lifetime Limited

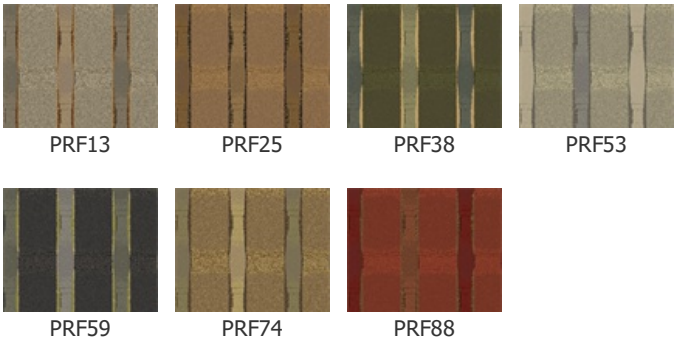

All designs are ©Beaulieu Group, LLC All Rights Reserved

Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances. Components may be changed without notice due to raw material shortages and/or technological advances. Such variances do not affect performance.

201 Princeton Blvd.
PO Box 1110
Adairsville, GA 30103
(800) 451-1250

335 Roxton Street
Acton Vale, Quebec
Canada J0H1AQ
(888) 467-5075

