

DESCRIPTION

The Fail-Safe EXL offers buyers one of the best high abuse, specification grade exit signs on the market. Its architectural low profile combines 14 gauge steel and polycarbonate lens to withstand the toughest environments. The door attaches to the housing with four tamperproof fasteners. LEDs power the unit for energy-efficient, even illumination. These fixtures are UL/cUL listed for damp locations. The EXL is specifically designed for use in public access areas where safety and security are critical. Ideal for use in correctional facilities, public housing, schools, psychiatric wards, detention centers, military barracks, parks, and hospitals.

SPECIFICATION FEATURES

Housing/Door Frame

Die-formed, 14 ga. CRS housing and door frame. All welded construction. Black polyester powder coat finish. Hardness Minimum: 2H; Salt Spray: 500 hours.

Fasteners

Four captive, T20 stainless steel TORX®-head tamperproof screws prevent unauthorized access.

Sign Panel


Sign panel is impact-resistant polycarbonate lens backed with red polycarbonate lens and steel stencil lettering with knockout chevrons.

Emergency Lighting


(Optional) Self-contained, solid state, sealed nickel cadmium emergency lighting system provides 90 minutes of reliable emergency illumination.

Labels

UL/cUL listed for Damp Location.

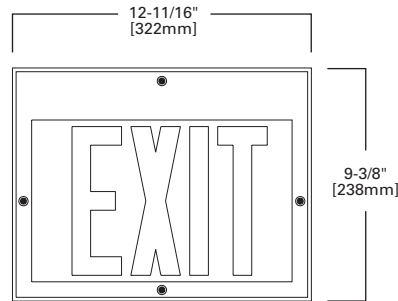

MOUNTING DIMENSIONS

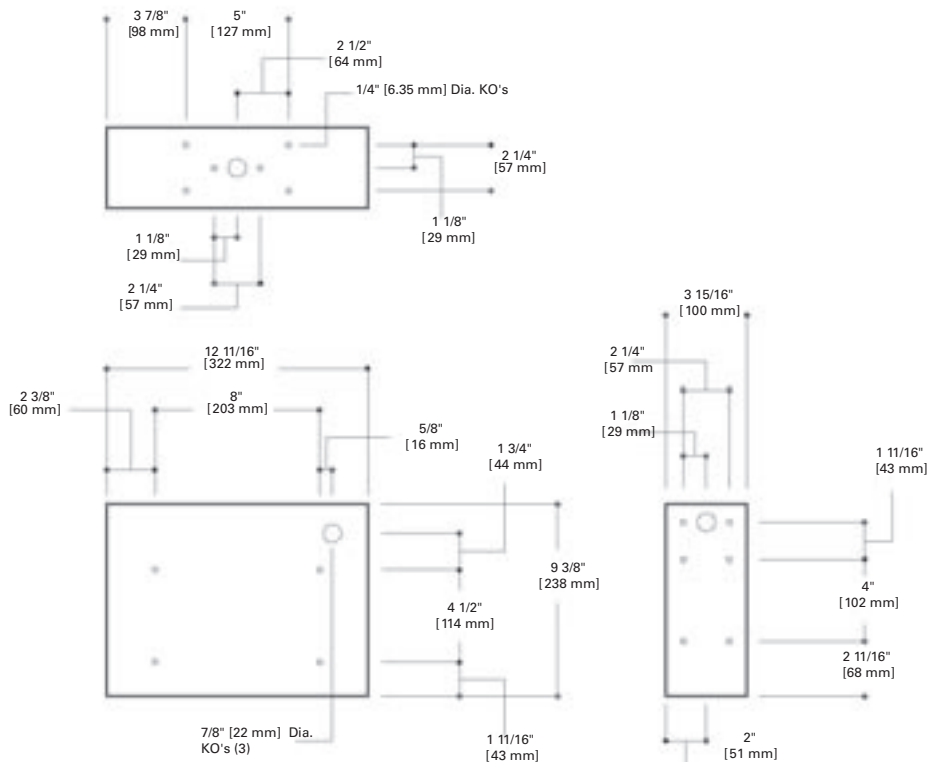

EXL

LED
Exit Lighting

Vandal Resistant
Ultimax Security

ENERGY DATA

AC Only, 120V - Red

Amps: 0.07

Watts: 0.98

Power Factor: 0.12

AC Only, 120V - Green

Amps: 0.07

Watts: 1.02

Power Factor: 0.13

AC Only, 277V - Red

Amps: 0.07

Watts: 1.04

Power Factor: 0.06

AC Only, 277V - Green

Amps: 0.07

Watts: 1.12

Power Factor: 0.06

Self Powered, 120V - Red

Amps: 0.07

Watts: 0.98

Power Factor: 0.12

Self Powered, 120V - Green

Amps: 0.07

Watts: 1.00

Power Factor: 0.13

Self Powered, 277V - Red

Amps: 0.07

Watts: 1.03

Power Factor: 0.06

Self Powered, 277V - Green

Amps: 0.07

Watts: 1.09

Power Factor: 0.05

Cooper Lighting

by F.T.N

ORDERING INFORMATION

SAMPLE NUMBER: EXL-6-1-RW-WH-DA

SERIES	TYPE	FACE OPTIONS	PANEL COLORS	HOUSING FINISHES	OPTIONS	ACCESSORIES
EXL						
EXL = EXIT LED Ultimax Security		1 = Single Face 2 = Double Face	RW =Red Letters on White GW =Green Letters on White O =Open Face ¹	BRZ = Bronze Blank = Black WH =White	Blank = No Arrows DA = Double Arrow LA = Left Arrow RA = Right Arrow L/R = Arrow Left and Arrow Right (double face exit only) LD = Less Downlight SF-3 = Allen head, center pin reject	VRSD =TORX [®] - Head, Vandal- Resistant Screwdriver 54600BLK =Black Mounting Pedestal 54600WHT =White Mounting Pedestal 54600BRZ =Bronze Mounting Pedestal
6 = AC 7 = EBP Emergency Battery Pack						

Note:

All units, AC or EBP, are dual voltage 120/277, 230V 50Hz; available as PDRs.

¹ Order lens kit / wording separately:

EXAMPLES:

LNS EXL RW DARK ROOM IN USE
 LNS EXL GW AREA OF RESCUE
 LNS EXL RW X-RAY IN USE
 LNS EXL GW SALIDA