

DESCRIPTION

This architecturally styled wall-mounted luminaire meets the demands of today's modern facilities. The MPBL provides optimal reading and ambient light with specially designed optics. Its sleek design uses minimal wall space and helps enhance the look of any environment. The MPBL is intended for use in patient rooms, general administrative offices, or wherever an attractive, functional wall mount fixture is preferred.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Housing

Aluminum extruded housing with die cast aluminum end caps. Optional: die cast aluminum flat end caps.

Mounting

Wall mounted with bracket for easy installation; (ships with fixture).

Finish

Matte white, electrostatically applied, powder coat finish on all exterior painted parts.

Lens

Uplight: Up to 0.140" thick, clear, prismatic acrylic lens (thickness varies based on prism profile). Prisms are located on the inside for easy cleaning. Downlight: Up to 0.140" thick, diffused, prismatic acrylic lens (thickness varies based on prism profile). Prisms are located on the inside for easy cleaning. Top and bottom lenses snap in place; no tools required.

Lamps

T8 linear fluorescent and T5 linear fluorescent lamps.

Ballast

Electronic Class P, CBM/ETL ballast.

Labels


UL/cUL listed for damp locations.




MPBL

T5
T8
Fluorescent

WALL

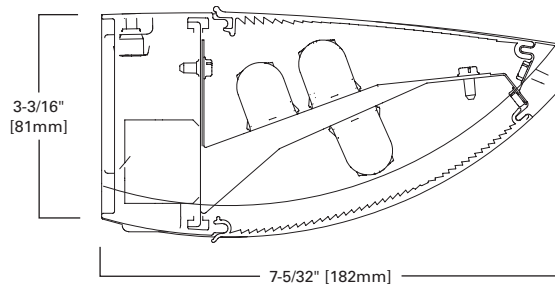

MOUNTING DIMENSIONS

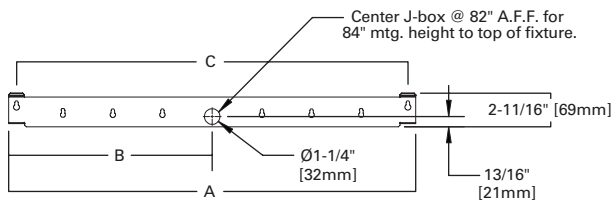

Wall Mounting Bracket Mounting Dimensions			
MPBL Spec. Length	A	B	C
2 ft.	20.750	10.375	19.500
3 ft.	32.750	16.375	31.500
4 ft.	44.750	22.375	43.500

ORDERING INFORMATION

SAMPLE NUMBER: MPBL-2/139-120-EB52-LVCP

Series MPBL =Medical Patient Bed Light		Voltage 120 =120V 277 =277V 347 =347V UNV =120V-277V		Options LVCP =Low voltage controller (patient controlled) 1, 3, 5 AM =Antimicrobial Paint Finish GLR =Fuse and Holder PS4 =Pull Chain, Four Position, Center Mount 2,7 PS4L =Pull Chain, Four Position, Left Hand Orientation 2,7 PS4R =Pull Chain, Four Position, Right Hand Orientation 2,7 FEC =Flat Endcaps, Die Cast Aluminum	
Lamp Configuration 2/0 =2 Up, 0 Down 2/1 =2 Up, 1 Down 1/0 =1 Up, 0 Down 1/1 =1 Up, 1 Down 0/1 =0 Up, 1 Down		Ballast EB51 =(1) T5 Ballasts EB81 =(1) T8 Ballasts EB52 =(2) T5 Ballasts EB82 =(2) T8 Ballasts		Finish Options Blank =Matte White (if not specified, fixture ships matte white) IH =Almond Finish DP =Dark Platinum Custom Colors are available (specify or supply sample; consult customer service).	
Lamp Type					
2' Unit ⁴		4' Unit			
T5 Fluorescent 14 =14W Lamps 24 =24W Lamps ⁶		T5 Fluorescent 28 =28W Lamps 54 =54W Lamps ⁶			
T8 Fluorescent 17 =17W Lamps		T8 Fluorescent 32 =32W Lamps			
3' Unit					
T5 Fluorescent 21 =21W Lamps 39 =39W Lamps ⁶					
T8 Fluorescent 25 =25W Lamps					

Notes:

1. LVCP not compatible with all fixture lengths and options. Consult factory to verify fit.
2. 120V only with PS4, PS4L, and PS4R.
3. The switching device is to be normally-open, momentary contact switch. Activation of the contact provides the following illumination scenarios: Down only - on, Up only-on, Up and Down - on, Up and Down-off. Other switching options available. Consult factory.
4. Available single ballast only. No options.
5. Must specify voltage.
6. Not available with 54 watt T5, 39 watt T5, or 24 watt T5, lamps in "2 up" configurations.
7. PS4 available 4' unit only, 1 Up/1 Down, 1 Up/2 Down, or 2 Up/1 Down only. Location of pull chain is determined by looking at the front of the fixture installed on the wall.

Special Claims:

When mounting, installer must verify fixture weight in selecting proper anchoring; when not anchoring directly to stud. Refer to installation instructions.