




A LIGHT DUTY  
EMERGENCY  
LIGHT

FEATURES

- Dual 120/277 VAC 60Hz input
- Solid-state charging and transfer circuitry (no relays are used)
- Two-step charger
- Housing is fabricated with 20-gauge cold-rolled steel
- Universal mounting knockouts are provided
- Sealed, maintenance-free, long-life lead calcium battery

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.  
**COMPLIANCES:** UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

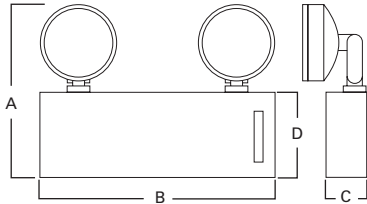

A	B	C	D
9-15/16" [252mm]	13-3/8" [340mm]	2-7/16" [26mm]	4-15/16" [125mm]

ORDERING INFORMATION - NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)		Dimensions (mm)		Shipping Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6AC10	10	-	-	-	2	5.4	-	6RW5	9-15/16" (252mm)	13-3/8" (340mm)	2-7/16" (62mm)	4-15/16" (125mm)	6

OPTIONS AND ACCESSORIES

Options: Add to catalog number	Code	Accessories: Add to catalog number	Code
Description		Description	
Halogen Lamp, 6 Volt 6 Watt	6HB6	Cord Sets	
		120 Volt	3 CP
		277 Volt (specify male plug type)	3 OP
		Wire Guards (consult factory)	

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit [www.cooperlighting.com](http://www.cooperlighting.com) for available options, accessories and ordering information.