




RF SURFACE HEADS - METAL REMOTE

- FEATURES**
- All metal heads
 - Choose single, double or triple remote heads
 - Double-joint adjustable 359-degree swivel
 - Brushed aluminum standard (other finishes available)
 - Mounts to standard 4" round junction box
 - 6 or 12 Volt wedge-base incandescent lamp is standard

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; Wet Location, NYC Code Compliant

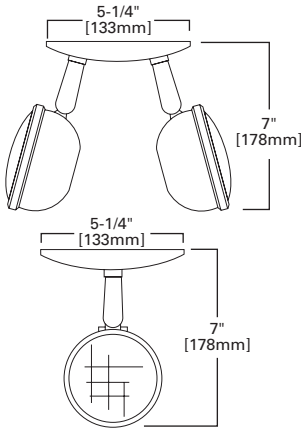

ORDERING INFORMATION - NEW YORK CITY / NATIONAL

Family	Number of Heads	Shipping Weight
RF401	1	2
RF402	2	4
RF403	3	6

Note: Maximum wattage per head is 50 watts. Please specify lamp when ordering.

ACCESSORIES AND OPTIONS

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number	Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
-------	---------------------	--------	-----------------------------	-------	---------------------	--------	-----------------------------

INCANDESCENT PAR 36 SEALED BEAM

6 VOLT			
7.2	6RS7	95	2
9.0	6RS9	108	3
12.0	6RS12	137	10
18.0	6RS18	158	8
25.0	6RS25	318	9
30.0	6RS30	380	--
12 VOLT			
9.0	12RS9	111	3
12.0	12RS12	177	10
18.0	12RS18	213	8
25.0	12RS25	327	11
35.0	12RS35	439	--

HALOGEN - BI-PIN

6 VOLT			
6.0	6HB6	113	3
8.0	6HB8	163	4
10.0	6HB10	201	5
12.0	6HB12	302	6
20.0	6HB20	402	7
12 VOLT			
8.0	12HB8	163	4
12.0	12HB12	302	6

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
-------	---------------------	--------	-----------------------------

INCANDESCENT DOUBLE CONTACT BAYONET BASE

6 VOLT			
6.0	6RD6	56	2
13.0	6RD13	122	2
18.0	6RD18	211	5
28.0	6RD25	360	6
12 VOLT			
6.0	12RD6	56	2
13.0	12RD13	153	4
28.0	12RD28	360	6

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
-------	---------------------	--------	-----------------------------

INCANDESCENT PAR36 SEALED BEAM

6 VOLT			
6.0	6HS6	107	3
8.0	6HS8	155	4
10.0	6HS10	191	5
12.0	6HS12	302	6
20.0	6HS20	382	7
12 VOLT			
8.0	12HS8	155	4
12.0	12HS12	302	6

* Photometrics for 6RW5 and 12RW5 use 75% of ISO Chart No. 2