


FEATURES

- Thermoplastic heads
- Choose single, double or triple remote heads
- Double-joint adjustable 359-degree swivel
- White finish standard
- Mounts to standard 4" round junction box
- 6 or 12 Volt wedge-base incandescent lamp is standard
- Gray finish standard on weatherproof (WP) units
- Halogen lamp options only available with OS (pinchback style) head

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL924 Listed; Damp Location

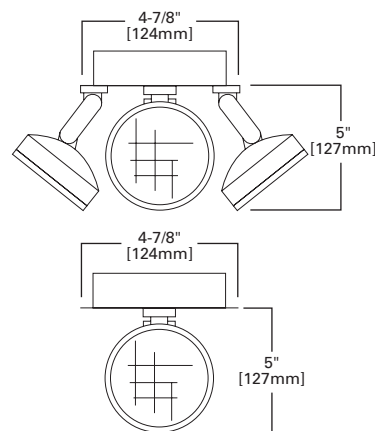

**RF SURFACE
HEADS - PLASTIC
REMOTE**

ORDERING INFORMATION - NEW YORK CITY / NATIONAL

Catalog Number	Number of Heads	Shipping Weight
RF301	1	2
RF302	2	4
RF303	3	6
RF301-OS*	1	2
RF302-OS*	2	4
RF303-OS*	3	6

Note: Maximum wattage per head is 25 watts. Please specify lamp when ordering.

*Sealed Beam Lamps will be used with OS Head only

ACCESSORIES AND OPTIONS

Options: Add to Catalog Number Description	Code	Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
Weatherproof	WP				

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
INCANDESCENT PAR 36 SEALED BEAM			
6 VOLT			
7.2	6RS7	95	2
9.0	6RS9	108	3
12.0	6RS12	137	10
18.0	6RS18	158	8
25.0	6RS25	318	9
30.0	6RS30	380	--
12 VOLT			
9.0	12RS9	111	3
12.0	12RS12	177	10
18.0	12RS18	213	8
25.0	12RS25	327	11
35.0	12RS35	439	--

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
INCANDESCENT WEDGE BASE			
6 VOLT			
3.6	6RW3	50	1
5.4	6RW5	75	*
7.2	6RW7	101	2
9.0	6RW9	132	3
12.0	6RW12	163	4
12 VOLT			
5.4	12RW5	75	*
9.0	12RW9	132	3
12.0	12RW12	163	4
18.0	12RW18	260	6

HALOGEN - BI-PIN

6 VOLT			
6.0	6HB6	113	3
8.0	6HB8	163	4
10.0	6HB10	201	5
12.0	6HB12	302	6
20.0	6HB20	402	7
12 VOLT			
8.0	12HB8	163	4
12.0	12HB12	302	6

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
INCANDESCENT DOUBLE CONTACT BAYONET BASE			
6 VOLT			
6.0	6RD6	56	2
13.0	6RD13	122	2
18.0	6RD18	211	5
28.0	6RD25	360	6
12 VOLT			
6.0	12RD6	56	2
13.0	12RD13	153	4
28.0	12RD28	360	6

Watts	Lamp Catalog Number	Lumens	ISO Footcandle Chart Number
INCANDESCENT PAR36 SEALED BEAM			
6 VOLT			
6.0	6HS6	107	3
8.0	6HS8	155	4
10.0	6HS10	191	5
12.0	6HS12	302	6
20.0	6HS20	382	7
12 VOLT			
8.0	12HS8	155	4
12.0	12HS12	302	6