




FEATURES

- Dual 120/277 VAC, 60Hz input
- Solid-state charger and transfer circuitry
- Momentary test switch; circuit is battery short circuit protected
- Brownout protection, low-voltage disconnect
- 6 or 12 Volt long life, maintenance-free, sealed nickel cadmium battery
- Durable, white powder-coat standard finish
- Steel units fabricated of 20-gauge steel

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; Damp Location, NYC Code Compliant

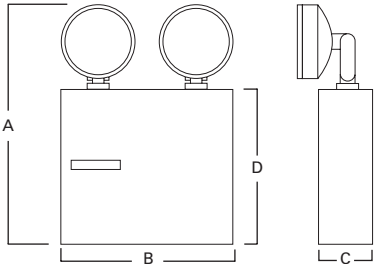

AN SPECIFICATION
EMERGENCY
LIGHT

ORDERING INFORMATION - NEW YORK CITY / NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)				Ship Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6AN25	25	20	14	10	2	12	–	6RW12	14" (355mm)	10" (254mm)	2-5/8" (67mm)	9" (229mm)	13
12 VOLT													
12AN50	50	36	25	10	2	12	–	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	15
12AN72	72	60	50	36	2	12	–	12RW12	14" (355mm)	13" (330mm)	2-5/8" (67mm)	9" (229mm)	22

OPTIONS AND ACCESSORIES

Options: Add to Catalog Number		Accessories: Add to catalog number	
Description	Code	Description	Code
No Heads	0	Cord Sets	
One Head	1	120 Volt	3 CP
Three Heads	3	277 Volt (specify male plug type)	0 CP
Voltmeter	V	Mounting Bracket (specify model to be used with)	MB
Time Delay	TD	Mounting Shelf (specify model to be used with)	MS
New York City Approved	NY	Wire Guards (consult factory)	GXBW

HALOGEN LAMP OPTIONS

Unit	Watt Lamp Only	Replacement Lamp Number
6 Volt (all units)	12	6 HB 12
12 Volt (all units)	12	12 HB 12

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.