




H INDUSTRIAL
EMERGENCY
LIGHT

FEATURES

- Dual 120/277 VAC 60 Hz input
- Solid-state charging and transfer circuitry
- Two-step charger
- Circuit is battery short circuit and reverse polarity protected
- Brownout protected, line-latched transfer circuit
- Output is electronically short circuit and overload protected
- Housing fabricated with 18-gauge cold-rolled steel

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

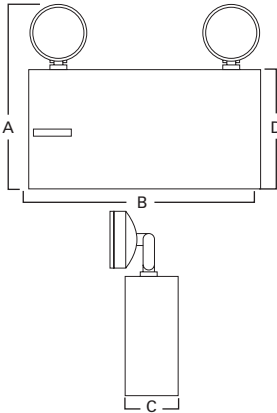

ORDERING INFORMATION - NEW YORK CITY

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)				Shipping Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6HCNY7	200	150	100	90	2	12	–	6RW12	14" (355mm)	18-5/8" (473mm)	4" (102mm)	9" (229mm)	38
12 VOLT													
12HCNY7	200	150	100	90	2	12	–	12RW12	14" (355mm)	18-5/8" (473mm)	4" (102mm)	9" (229mm)	38
12HCNY8	300	225	150	135	2	12	–	12RW12	14" (355mm)	18-5/8" (473mm)	7-1/2" (191mm)	9" (229mm)	64
12HCNY9	400	300	200	180	2	12	–	12RW12	14" (355mm)	18-5/8" (473mm)	7-1/2" (191mm)	9" (229mm)	74

ORDERING INFORMATION - NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Max Remote Heads	Replacement Lamp	Dimensions (mm)				Shipping Weight
	1.5	2	3	4					A	B	C	D	
6 VOLT													
6HC200	200	150	100	90	2	9	–	6RW9	14" (355mm)	18-5/8" (473mm)	4" (102mm)	9" (229mm)	38
12 VOLT													
12HC200	200	150	100	90	2	9	–	12RW9	14" (355mm)	18-5/8" (473mm)	4" (102mm)	9" (229mm)	38
12HC300	300	225	150	135	2	9	–	12RW9	14" (355mm)	18-5/8" (473mm)	7-1/2" (191mm)	9" (229mm)	64
12HC400	400	300	200	180	2	9	–	12RW9	14" (355mm)	18-5/8" (473mm)	7-1/2" (191mm)	9" (229mm)	74

OPTIONS AND ACCESSORIES

Options: Add to catalog number Description	Code	Accessories: Add to catalog number Description	Code
No Heads	0	Cord Sets	
One Head	1	120 Volt	3 CP
Three Heads	3	277 Volt (specify male plug type)	3 OP
Voltmeter (1)	V		
Ammeter (1)	A		
Time Delay	TD	Mounting Shelf (specify model to be used with)	MS
Non Standard Voltages (consult factory)			
New York City Approved	NY	Wire Guards (consult factory)	
HALOGEN LAMP OPTIONS		Remote Fixtures (See remote fixtures)	

*Only available with OS Head

Unit	Watt Lamp Only	Replacement Lamp Number
6 Volt (all units)	12	6 HB 12*
12 Volt (all units)	12	12 HB 12*

Notes: N.Y.B.S.A. Calendar (approval) #34013.
(1) Units may NOT be equipped with a voltmeter and ammeter at the same time.
Note: When using halogen lamps, total connected lamp load must be at least 80% of 90 min. rating, or premature lamp failure may occur.

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.