

Catalog #		Type
Project		
Comments		Date
Prepared by		

FEATURES

- Dual 120/277 VAC 60Hz input
- Solid-state battery charger and switching in self-powered version
- Brownout circuit; test switch/power indicator light
- Long-life, energy-efficient LED lamps
- High-impact, clear acrylic panel



**MARATHON
SURFACE EDGE-LIT
EXIT SIGN**

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant


ORDERING INFORMATION

SAMPLE NUMBER: SCMA16GCBKAL


Mounting	Operation	Number of Faces	Letter Size	Letter/Panel Color	Trim Finish	Arrow Direction
SBM =Back Wall SCM =Ceiling SEM =End Wall SPM =Pendant	A =AC-Only S =Self-Powered	1 =Single 2 =Double	6 =6" 8 =8" (Red Only) ¹	GC =Green on Clear (Single Face Only) GW =Green on White RC =Red on Clear (Single Face Only) RM =Red on Mirror Mylar RW =Red on White	BK =Polished Black BR =Polished Brass BZ =Bronze PA =Polished Aluminum SA =Satin Aluminum WH =White	[Blank] =No Arrow AL =Arrow Left AR =Arrow Right DH =Double Headed Arrows LR =Double Face Arrows

NOTES: 1. NYC Code Compliant with 8" letters only.


SURFACE, WALL MOUNT

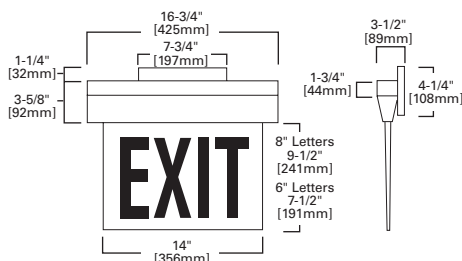


SURFACE, CEILING MOUNT

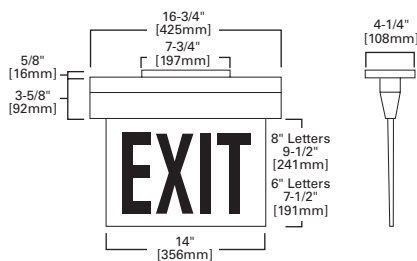

SURFACE, END MOUNT

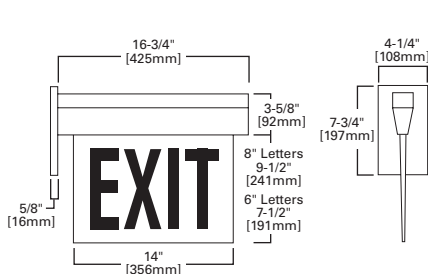

SURFACE, PENDANT MOUNT

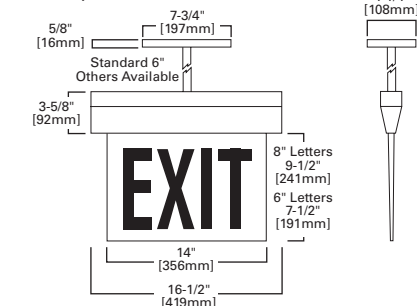

ENERGY DATA

Maximum power consumption under all charge conditions:

LED Exits, Red Letters, AC Only

Input Power:
120V = 3.8W
277V = 3.9W

Input Current (Max.):
120V = .03
277V = .02

Power Factor:
120V = .93
277V = .93

LED Exits, Red Letters, Self-Powered

Input Power:
120V = 4.6W
277V = 4.8W

Input Current (Max.):
120V = .04
277V = .02

Power Factor:
120V = .90
277V = .89