



FEATURES

- Dual 120/277 VAC, 60Hz input
- Solid-state charging and transfer circuitry
- Two-step charger
- Battery short circuit and reverse polarity protected
- Brownout protected; line-latched transfer circuit
- Output is electronically short circuit and overload protected
- Low-voltage disconnect
- Mounting brackets supplied
- 18" and 27" rigid mounting bars available

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.


COMPLIANCES: UL924 Listed; Damp Location, NYC Code Compliant

ROB RECESSED
OBLONG
EMERGENCY
LIGHT

ORDERING INFORMATION - NEW YORK CITY / NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Lamp Number	Lamp Description	Shipping Weight
	1.5	2	3	4					
6 VOLT									
6ROB10	10	–	–	–	2	5.4	6RW5	Incandescent Wedge Base	6
12 VOLT									
12ROB24	24	–	–	–	2	12	12RW12	Incandescent Wedge Base	7

Note: Halogen Bi-Pin lamp available on request.
Option: Nickel Cadmium battery, add NC.

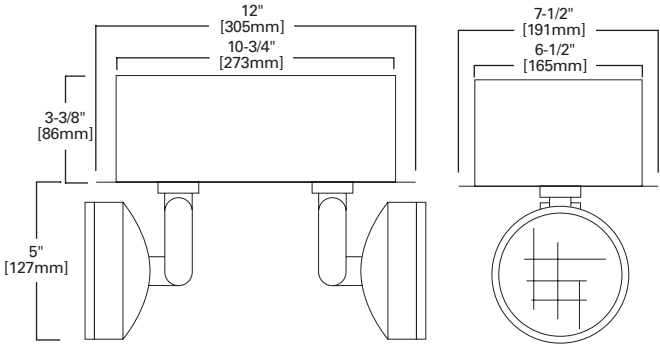

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.