

FEATURES

- Dual 120/277 VAC, 60Hz input
- Solid-state charging and transfer circuitry
- Low-voltage disconnect in lead calcium units
- Circuit is battery short circuit and brownout protected
- Reverse polarity protected
- Line-latched transfer circuit
- Output is electronically short circuit and overload protected
- Low-voltage disconnect in lead calcium units
- NEMA 4X Rated

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; NFPA 101 Compliant




X SERIES NEMA
EMERGENCY
LIGHT

ORDERING INFORMATION

SAMPLE NUMBER: 6XC27-3

Volts	Family	Battery Type	Capacity in Watts (90 minutes)	Options and Accessories
12=12 Volts 6=6 Volts	X=NEMA	C=Lead Calcium NC=NiCad	100=12V Lead Calcium 27=6V/12V Lead Calcium 50=6V/12V NiCad 54=6V/12V Lead Calcium 72=12V NiCad	Accessories 0 CP=277V (Specify Male Plug Type) 3 CP=120V GXBW=Wire Guards MS=Mounting Shelf TD=Time Delay Kit Options 0=No Heads 1=One Head 3=Three Heads NY=New York City Approved

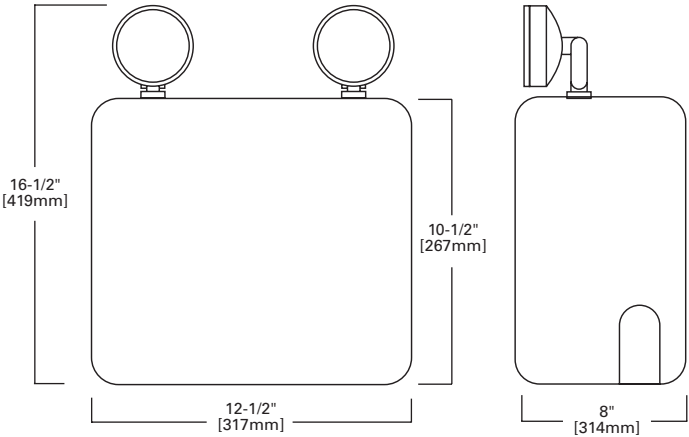

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.