


FEATURES

- Dual-voltage input 120/277 VAC, 60Hz
- Solid-state circuitry (no mechanical relay is used)
- Constant-current charger
- Sealed, maintenance-free nickel cadmium battery
- Formed 20-gauge steel housing and faceplate construction
- Durable powder coat white finish standard; other finishes available
- Easily-removed, changeable directional chevrons
- Low-profile canopy
- Recessed version available

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

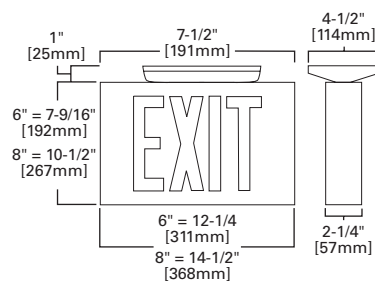

**XLA1, XLN1 LED
EXIT SIGN**

ORDERING INFORMATION

SAMPLE NUMBER: XLA1-6SR1

Family	Letter Size	Housing	Letter Color	Number of Faces	Options and Accessories
XLA1=AC Only XLN1=Self-Powered	6=6" 8=8" (Red Only)	S=Steel	G=Green R=Red	1=One Face 1C=One Face with Canopy 2U=Universal, Two Faces with Canopy and Extra Backplate	Accessories CXB=Canopy Kit, Black CXW=Canopy Kit, White GXB=Wire Guard, Wall Mount, AC-Only Exit GXBC=Wire Guard, Ceiling-End Wall Mount, Self-Powered Exit GXBW=Wire Guard, Wall Mount, Self-Powered Exit GXC=Wire Guard, Ceiling-End Wall Mount, AC-Only Exit STB12=12" Stem and Canopy Kit, Black STB6=6" Stem and Canopy Kit, Black STW12=12" Stem and Canopy Kit, White STW6=6" Stem and Canopy Kit, White