


FEATURES

- Dual-voltage input 120/277 VAC, 60Hz
- Solid-state circuitry (no mechanical relay is used)
- Constant-current charger
- Sealed, maintenance-free nickel cadmium battery
- Durable die-cast aluminum housing and faceplate
- Contemporary styled, soft-corner design
- White and black finishes available, brushed finish standard
- Easily removed, changeable directional chevrons
- Low-profile mounting canopy

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

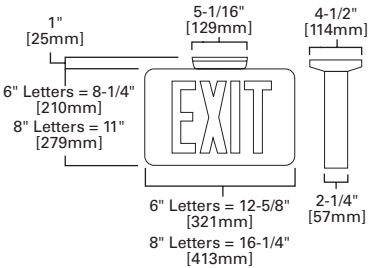

XLA2, XLN2 LED
EXIT SIGN

ORDERING INFORMATION

SAMPLE NUMBER: XLA26DR1

Family	Letter Size	Housing	Letter Color	Number of Faces	Options and Accessories
XLA2=AC-Only XLN2=Self-Powered	6=6" 8=8" (Red Only) ¹	D=Die-Cast	G=Green R=Red	1=One Face 1C=One Face with Canopy 2C=Two Faces with Canopy	Accessories DCB=Canopy Kit, Black DCW=Canopy Kit, White GXB=Wire Guard, Wall Mount, AC-Only Exit GXBC=Wire Guard, Ceiling-End Wall Mount, Self-Powered Exit GXBW=Wire Guard, Wall Mount, Self-Powered Exit GXC=Wire Guard, Ceiling-End Wall Mount, AC-Only Exit STDB12=12" Stem and Canopy Kit, Black STDB6=6" Stem and Canopy Kit, Black STDW12=12" Stem and Canopy Kit, White STDW6=6" Stem and Canopy Kit, White TPS=Stainless Steel Tamperproof Screws VRS=Vandal Resistant Shield

NOTES: 1. NYC Code Compliant with 8" letters only.

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.