

DESCRIPTION

Recessed 8 inch aperture open wall wash for vertical 26W double twin tube or 26/32/42W triple twin tube compact fluorescent lamp. Fixture is suitable for commercial construction. Insulation must be kept 3" from top and sides of housing. Universal input electronic ballast with dimming or emergency options.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

MECHANICAL

Frame

Boat shaped galvanized steel frame with 1/2" plaster lip accommodates ceilings up to 2" thick. May be used for new construction or remodeling installations. Provided with (2) remodel clips to secure frame when installed from below the ceiling.

Mounting Brackets

Bar hanger receivers adjusts 2" vertically from above the ceiling or thru the aperture. Use with No Fuss™ bar hangers or with 1/2" EMT. Removable to facilitate installation from below the ceiling.

No Fuss™ Bar Hangers

Pre-installed and centered bar hanger locks to tee grid with a screwdriver or pliers. Centering marks on the bar hanger mechanism allows consistent positioning of fixtures.

OPTICAL

Reflector

Highly efficient one piece aluminum reflector combined with spun aluminum gradient kicker reflector provides for vertical illumination with a downlight component. Equal cutoff on room side and uniform illumination of the wall plane for a visually comfortable optic. Self flanged standard.

- **Specular Reflectors** - Polished flange standard with white painted flange option.
- **Baffles and White Reflector** - White painted flange standard.

Trim Retention

Reflector assembly is retained with two torsion springs and held tightly to the finished ceiling surface. Orientation markings on housing and trim facilitate proper alignment.

ELECTRICAL

Junction Box

(6) 1/2" and (2) 3/4" trade size pry outs positioned to allow straight conduit runs. Listed for (12) #12 AWG (six in, six out) 90°C conductors and feed thru branch wiring.

Lamp Socket

4-pin G24q base accepts (1) 26W DTT or 26/32/42W TTT lamp.

Socket Cap

Galvanized steel socket housing attached securely to reflector with turn & lock mechanism, two mounting heights for 26W DTT/42W TTT and 26/32W TTT. Vents provide effective lamp thermal management.

Control Gear

Universal 120V - 277V UNV or 347V input electronic ballast for 26/32/42W compact fluorescent lamp.

Emergency Battery Pack

REM - Remote emergency test switch. Housing includes 120V/277V, 60Hz dual-tap battery pack provides 90 minutes of emergency illumination. Long life maintenance free sealed nickel cadmium batteries recharge fully in 24 hours. REM configuration includes prewired and attached

remote test switch plate and indicator light. REM option is the standard emergency configuration, and is compatible with all standard reflector options, ordered separately.

Average lamp lumen ratings for REM options: 26W 810lm, 32W 910lm, 42W 1040lm (Note: average raw lamp lumens are based upon REM manufacturer ratings. Delivered lumens depend upon trim; refer to trim photometry to factor delivered lumens).

Code Compliance

- Thermally protected and cULus listed for damp locations.
- IP20 rated for open trims.
- NFPA Life Safety (Emergency Battery Pack).
- EMI/RFI per FCC Title 47 CFR, Part 18, non consumer limits.
- Peel down wattage label from 42W to 32W and 26W. Allows de-rating to set max relamp wattage per project specifications (multi-wattage housings only).
- DR - De-rated label housings are wattage specific for 26/32W or 26W.
- High efficacy luminaire may be used to meet IECC, ASHRAE, and Title 24 commercial standards.



**PD8V142
80VWW**

**26W DTT
26/32/42W TTT**

Compact Fluorescent

**8-Inch Aperture
Open Wall Wash**


**New Construction or
Remodel
Non-IC**

ENERGY DATA

PD8V142E, PD8CPV142E	
MIN. STARTING TEMP -5°F / -20°C	SOUND RATING CLASS A
EMI/RFI EMISSIONS FCC 47CFR PART 18 NON-CONSUMER LIMITS	
INPUT FREQUENCY 50/60 Hz	POWER FACTOR > 0.98
THD < 10%	INPUT VOLTAGE 120V - 277V ±10%
CREST FACTOR < 1.7	
OPERATING FREQUENCY > 40kHz	UL LISTED CLASS P, TYPE 1 OUTDOOR, CSA OR C/UL CERTIFIED
CFQ26W/G24Q	Input Power 28W
	Input Current 0.50A @ 120V
	Input Current 0.22A @ 277V
	Ballast factor 1.00
CFTR26W/GX24Q	Input Power 28W
	Input Current 0.50A @ 120V
	Input Current 0.22A @ 277V
	Ballast factor 1.00
CFTR32W/GX24Q	Input Power 35W
	Input Current 0.50A @ 120V
	Input Current 0.22A @ 277V
	Ballast factor .98
CFTR42W/GX24Q	Input Power 45W
	Input Current 0.50A @ 120V
	Input Current 0.22A @ 277V
	Ballast factor .96

PD8V1423E	
MIN. STARTING TEMP 0°F / -18°C	SOUND RATING CLASS A
EMI/RFI EMISSIONS FCC 47CFR PART 18 NON-CONSUMER LIMITS	
INPUT FREQUENCY 60 Hz	POWER FACTOR > 0.98
THD < 10%	INPUT VOLTAGE 347VAC ±10%
OPERATING FREQUENCY 50-60 kHz	cULUS LISTED CLASS P, TYPE 1 OUTDOOR, TYPE CC
CFQ26W/G24Q	Input Power 31W
	Input Current 0.09A @ 347V
	Ballast factor 1.02
	Crest factor < 1.6
CFTR26W/GX24Q	Input Power 31W
	Input Current 0.09A @ 347V
	Ballast factor 1.02
	Crest factor < 1.6
CFTR32W/GX24Q	Input Power 36W
	Input Current 0.11A @ 347V
	Ballast factor 0.98
	Crest factor < 1.5
CFTR42W/GX24Q	Input Power 50W
	Input Current 0.15A @ 347V
	Ballast factor 1.00
	Crest factor < 1.5

DIMENSIONS

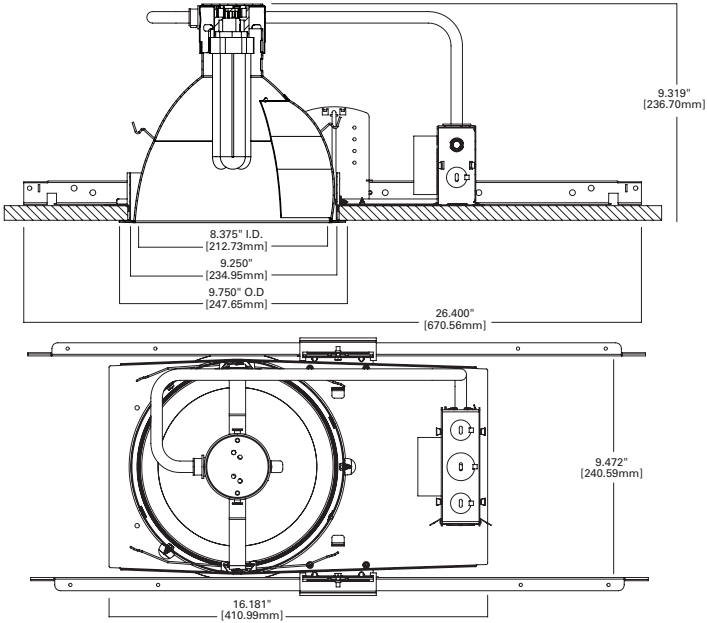


ORDERING INFORMATION

SAMPLE NUMBER: PD8V142E 80VWWC

Order housing, reflector and lamp separately for a complete luminaire.

<p>Housing Multi-Wattage PD8V142 = 8 Inch vertical (1) 26/32/42W DTT/TTT CFL PD8CPV142 = 8 Inch vertical (1) 26/32/42W DTT/TTT CFL, CCEA listed (Chicago Plenum) De-Rated Label PD8V132 = 8 Inch vertical (1) 26/32W DTT/TTT CFL PD8CPV132 = 8 Inch vertical (1) 26/32W DTT/TTT CFL, CCEA listed (Chicago Plenum) PD8V126 = 8 Inch vertical (1) 26W DTT/TTT CFL PD8CPV126 = 8 Inch vertical (1) 26W DTT/TTT CFL, CCEA listed (Chicago Plenum)</p>	<p>Ballast Option E = 120V - 277V 50/60Hz UNV REM = 120V/277V 60Hz dual-tap emergency battery ballast with remote test switch plate 3E = 347V, 50/60Hz 1DMARKX = 5% two-wire (26/32/42W) dimming, 120V 2DMARKX = 5% two-wire (26/32/42W) dimming, 277V EDMARK7 = 5% 0-10V discrete two-wire (26/32/42W) dimming, 120-277V 1DMARKXREM = 5% two-wire (26/32/42W) dimming, 120V; with REM emergency option 2DMARKXREM = 5% two-wire (26/32/42W) dimming, 277V; with REM emergency option EDMARK7REM = 5% 0-10V discrete two-wire (26/32/42W) dimming, 120-277V; with REM emergency option</p>	<p>Reflector 80VWW = 8" vertical open wall wash</p>	<p>Finish Option C=Specular Clear G=Specular Gold H=Semi Specular Clear W=White (White Flange)</p>	<p>Accessories HB128APK = L channel hanger bar, 26", 'No-Fuss', pair (replacement) RMB22 = 22" long wood joist mounting bars</p>
---	---	---	---	--

PHOTOMETRY

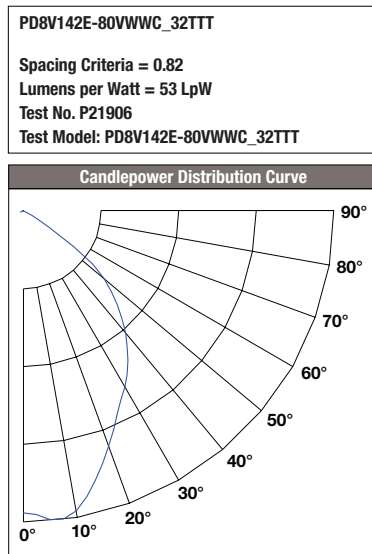

Candela Distribution	
Degrees Vertical	Candela
0*	1217
5	1304
15	1027
25	679
35	501
45	359
55	232
65	126
75	36
85	6
90	0

*CBCP

Luminance	
(Average Candela/M²)	
Degree	Avg. 0° Luminance
45	12070
55	9020
65	6024
75	2326
85	627

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Fixture
0-30	760.96	31.70	44.60
0-40	1129.52	47.10	66.30
0-60	1632.14	68.00	95.70
0-90	1704.82	71.00	100.00

Single Unit Footcandles							
2.5' from wall (distance from fixture along wall)							
1	13.2	8.8	3.1	0.9	0.3	0.1	0
2	21.1	16.4	9	3.9	1.4	0.4	0.1
3	18.1	14.6	9.8	5.7	2.5	0.9	0.3
4	13.1	10.8	8.1	5.5	3.5	1.8	0.6
5	9.2	7.9	6.2	4.7	3.3	2.1	1.3
6	6.8	5.9	4.8	3.8	2.9	2	1.4
7	5.1	4.5	3.8	3.1	2.4	1.8	1.3
8	3.9	3.5	3	2.5	2	1.6	1.2
9	3.1	2.7	2.4	2	1.7	1.4	1.1
10	2.4	2.1	1.9	1.7	1.4	1.2	0.9

Multiple Unit Footcandles			
2.5' from wall (spacing between fixtures)			
1	14.1	11.3	14.1
2	25	25.3	25
3	23.9	24.4	23.9
4	18.5	18.9	18.5
5	13.9	14.1	13.9
6	10.6	10.7	10.6
7	8.2	8.3	8.2
8	6.4	6.5	6.4
9	5.1	5.1	5.1
10	4.1	4	4.1

Multiple Unit Footcandles			
2.5' from wall (spacing between fixtures)			
1	13.4	6.3	13.4
2	22.5	18	22.5
3	20.6	19.5	20.6
4	16.5	16.2	16.5
5	12.5	12.5	12.5
6	9.6	9.6	9.6
7	7.5	7.5	7.5
8	6	6	6
9	4.8	4.8	4.8
10	3.9	3.8	3.9

Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.

Footcandle values are initial, apply appropriate light loss factors where necessary.

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com