

DESCRIPTION

Westwood 914 and 914-2 are ultra-compact wall fixtures for use with line voltage PAR38 halogen lamps. Model 914 utilizes one (1) 150W max. lamp (not included) and provides downlight or uplight. Model 914-2 utilizes two (2) 150W max. lamps (not included) and provides combination uplight and downlight. Both models mount over a standard 4" J-box and connect directly to 120V line voltage. Various lenses, louvers and color or dichroic filters can be combined - up to three at once - to create multiple lighting effects.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A ... Material

Housing and hood are precision-machined from corrosion-resistant 6061-T6 aluminum billet, brass or copper. Mounting canopy is constructed from corrosion-resistant silicone aluminum, brass or copper.

B ... Finish Painted

Fixtures constructed from 6061-T6 aluminum are double protected by a chromate conversion undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment. A variety of standard colors are available. Brass or Copper Fixtures constructed from brass or copper are left unpainted to reveal the natural beauty of the material and will patina naturally over time.

C ... Hood

Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects. The flush lens design sheds water and minimizes debris collection on the uplight position.

D ... Gasket

Housing and hood are sealed with a high temperature silicone o-ring gasket to prevent water intrusion.

E ... Lens

Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock.

F ... Mounting

Both models mount over a standard 4" J-box and connect directly to 120V line voltage. Model 914 utilizes one (1) 150W max. lamp (not included) and provides downlight or uplight. Model 914-2 utilizes two (2) 150W max. lamps (not included) and provides combination uplight and downlight.

G ... Hardware

Stainless steel hardware is standard to provide maximum corrosion-resistance.

H ... Socket

Ceramic socket with 250° C Teflon® coated lead wires and medium base.

I ... Electrical

Operates with 120V line voltage.

J ... Lamp


Not included. Available from Lumière as an accessory - see reverse side of this page.

K ... Labels & Approvals

UL and cUL listed, standard wet label. IP65 rated. Manufactured to ISO 9001-2000 Quality Systems Standard. IBEW union made.

L ... Warranty

Lumière warrants its fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers, ballasts and lamps carry the original manufacturer's warranty.



WESTWOOD

914


914-2

150W (max.) PAR38


Halogen
Line Voltage

Wall


IP65

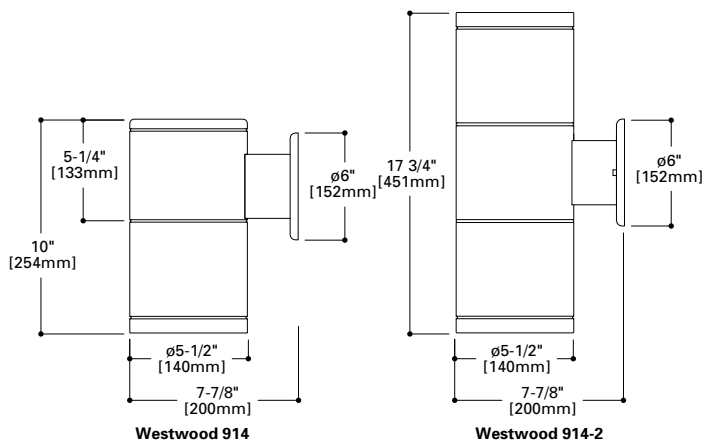

Westwood 914/914-2
Lamp=250PAR38/SP
CBCP=40,000

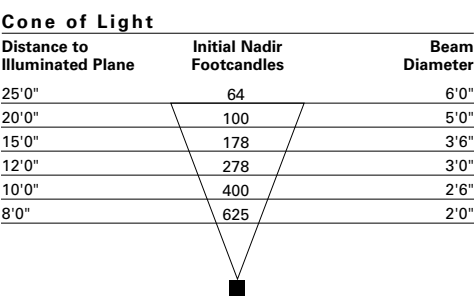

Westwood 914/914-2
Lamp=250PAR38/FL
CBCP=8000

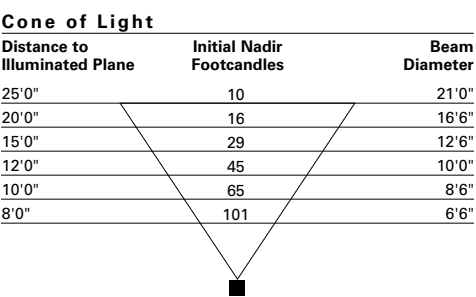

LAMP INFORMATION

Lamp	ANSI Code	Watts	Beam Spread	CBCP	°K	Life (hrs.)	Base	Volts
250PAR38/SP	---	250	11°	40,000	2880	4200	medium	120
250PAR38/FL	---	250	30°	8000	2880	4200	medium	120

NOTE: Inferior quality lamps may adversely affect the performance of this product. Use only name brand lamps from reputable lamp manufacturers.

NOTES AND FORMULAS

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.

ORDERING INFORMATION

Series

914=PAR38 Halogen Up/Down
Westwood Wall Fixture

Lamp Head Quantity

_

=One Lamp Head

2

=Two Lamp Heads

Source

Halogen

150PAR38=150W Max Halogen
PAR38, Medium Base

Voltage

120=120V

Finish

Painted

BK= Black
BZ= Bronze
CS= City Silver
VE= Verde
WT= White

Metal

NBR= Brass
NCP= Copper

Accessories

Filters

F71-38= Peach Dichroic Filter, 4.95" Dia
F73-38= Green Dichroic Filter, 4.95" Dia
F75-38= Yellow Dichroic Filter, 4.95" Dia
F77-38= Dark Blue Dichroic Filter, 4.95" Dia
F79-38= Neutral Density Dichroic Filter, 4.95" Dia
F22-38= Red Color Filter, 4.95" Dia
F44-38= Green Color Filter, 4.95" Dia
F66-38= Mercury Vapor Color Filter, 4.95" Dia

Optical Lenses

LSL-38= Linear Spread Lens (elongate standard beam spread),
4.95" Dia
DIF-38= Diffused Lens (provide even illumination), 4.95" Dia

Optical Louver

LVR-38= Hex Cell Louver (reduce glare), 4.95" Dia

Lamps

HP38150-SP= 150W PAR38 Halogen Spot, Medium Base

F72-38= Amber Dichroic Filter, 4.95" Dia
F74-38= Medium Blue Dichroic Filter, 4.95" Dia
F76-38= Red Dichroic Filter, 4.95" Dia
F78-38= Light Blue Dichroic Filter, 4.95" Dia
F80-38= Magenta Dichroic Filter, 4.95" Dia
F33-38= Blue Color Filter, 4.95" Dia
F55-38= Yellow Color Filter, 4.95" Dia

OSL-38= Overall Spread Lens (increase beam spread), 4.95" Dia

HP38150-FL= 150W PAR38 Halogen Flood, Medium Base

Notes: • Lamp not included.
• Consult your Cooper Lighting representative for additional options and finishes.