


## Installation Instructions for HLW6 and HLW7 Recessed Incandescent Lensed Wall Wash Fixtures

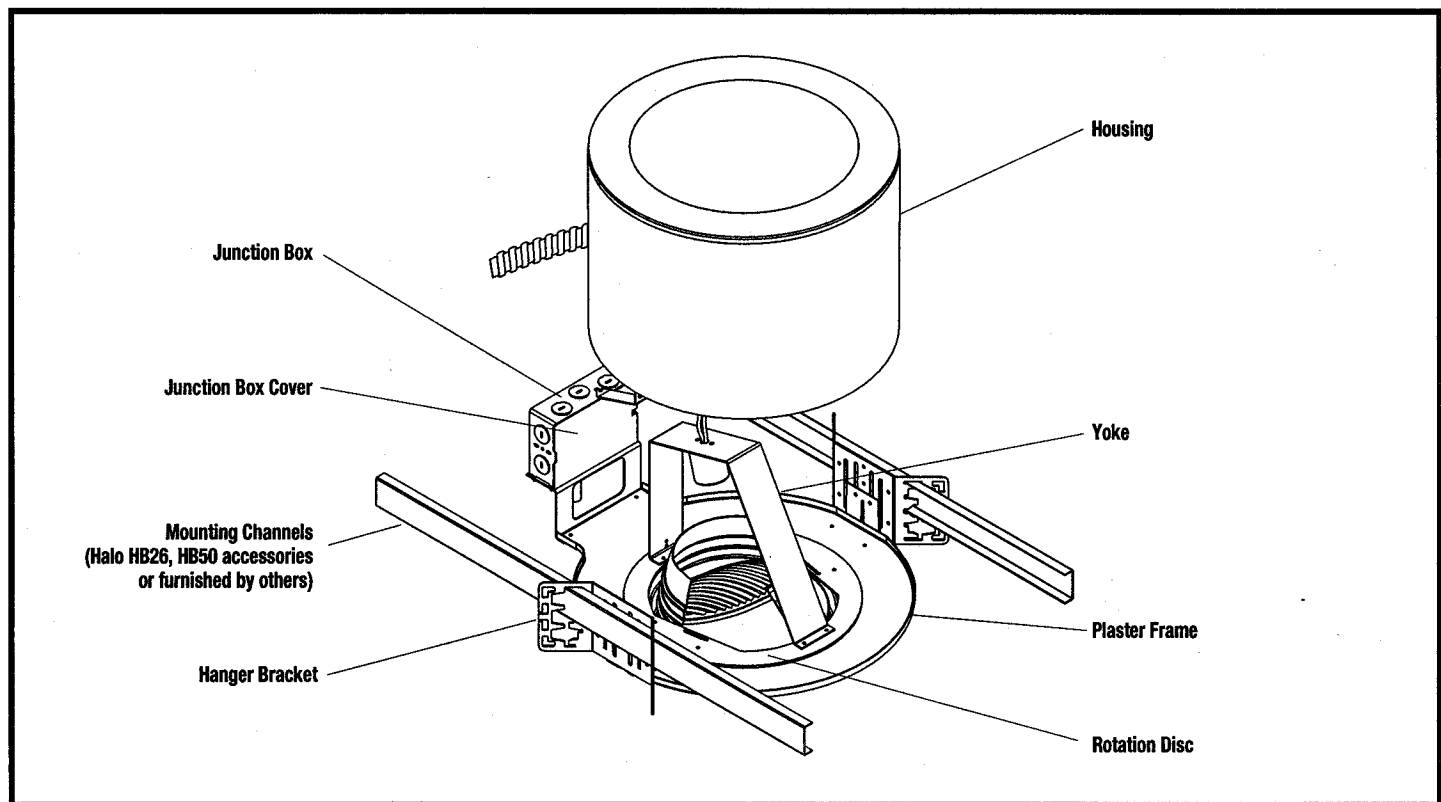

**CAUTION:** To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture.


**Note:** This fixture should be supported by main runners or other structure that is capable of supporting fixture weight of 35 lbs.

**Step 1 To Install Fixture:** Using standard bar hangers, C-Channels (available through Halo or furnished by others), 3/4" and 1 1/2" lathing or 1/2" conduit (all supplied by others), insert chosen support through the universal hanger brackets and secure the mounting bars or channels to the ceiling structure so that the edge of the die cast mounting frame is flush with the finished ceiling.

**Step 2 To Install Trim:** Trim is held in place with torsion springs that pass through slots in rotating plate. Note that torsion springs are located off center on the trim. Brackets are correspondingly off center. When installing trim, rotate plate and lock in place with locking screw so trim faces wall as shown. (Fig 1)

**Step 3 To Clean Trim:** First, gently wipe with a soft, clean, dry lint-free cloth to remove loose dust. Then, use mild detergent solution on a soft clean cloth to remove finger prints and stains. Rinse with clean, soft water and dry with lint-free cloth.

**FIG 1**

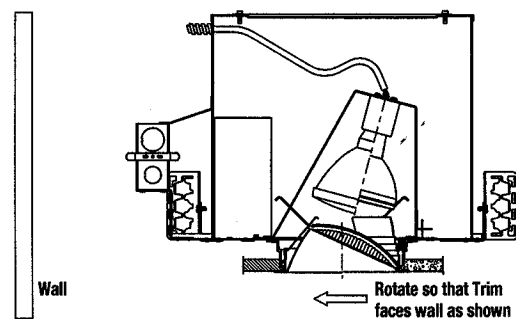

**WIRING DIAGRAM**

