

COOPER LIGHTING - SURE-LITES®

DESCRIPTION

Photoluminescent "Glow-in-the-Dark" exits are designed to absorb and store energy from existing light sources. The signs do not require electricity and are non-radioactive, non-toxic, and fire-resistant. This energy efficient exit is ideal for areas where electrical wiring is either difficult or unavailable. The PHL Series exits do not require regular maintenance and have a life expectancy of at least 25 years.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Electrical

- Non-Electrical
- Energizes from fluorescent lighting
- 90 minutes of illumination with a legible viewing distance of at least 50 feet
- Minimum 5 foot-candle external unfiltered illumination must be present on the sign at all times of building occupancy

Housing Construction


- Heavy-duty aluminum housing is impact-resistant, corrosion-proof and flame-retardant
- High-brightness strontium oxide aluminate photoluminescent pigment is applied directly onto housing
- Non-Radioactive and Non-Toxic
- Ceiling, Wall or End Mounting
- Universal, field-selectable chevrons

Code Compliance

- UL 924 Listed, meets Life Safety NFPA 101,
- ULC Listed, Most State and Local Codes

Warranty

- Exits: 5 years
- Rated Life: 25+ years

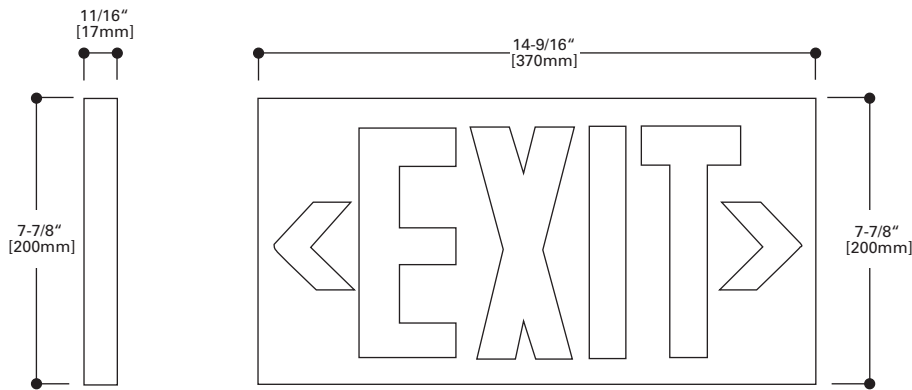

PHL SERIES

PHOTOLUMINESCENT EXIT
EXIT LIGHTING

TOTALLY PREDICTABLE
RELIABILITY.

ORDERING INFORMATION

Family	Face Options	Letter Colors (Outline)	Housing Color	Accessories
PHL= Photoluminescent Exit	1= Single 2= Double	R= Red G= Green	= Same as Letter Color BA= Brushed Aluminum	PHLS= Clear Acrylic Shield PHLJ= Large Canopy (J-Box)