

DESCRIPTION

Series 6ADW and 6AIW... A wall-mounted group committed to technology, proportion, simplicity, and to the spatial clarity of open plan space design available with a clear ribbed acrylic lens or round lateral baffle.

Features:

- Low glare, wide spread illumination.
- The extruded aluminum 4" round spatial tubes offer the the unity and quality required for today's energy-conscious, free-style open plan space design.
- Complimentary pendant-mounted luminaires are provided to any length, to any configuration, and in a standard or custom finish.

SPECIFICATION FEATURES

A ... Construction

Extruded aluminum housing.
Nominal 3', 4', 6' or 8' illuminated sections.

End Caps

Die-cast aluminum.

B ... Shielding

Clear ribbed acrylic lens or contoured baffle.

C ... Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.


Note: Please consult factory, Fifthlight may not be available in some configured options.

D ... Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Fixture mounts directly to existing structure over a 2"x 4" standard electrical box mounted horizontally in the wall.





Cirque 6-AIW 6-ADW

1 & 2T8
1 & 2T8
1 & 2T5HO

Wall

Semi-Direct
Semi-Indirect

Light Distribution
Indirect - 13.0%
Direct - 87.0%

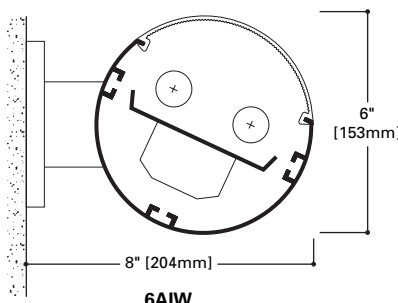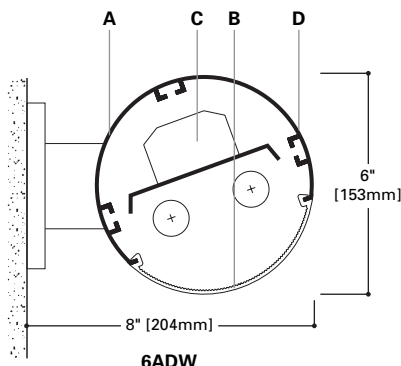


ORDERING INFORMATION

Sample Number: 6AIW-1T8-80-1EB-SI-S14


Series	Mounting	Number of Lamps (Not included)	Lamp Type	Voltage ¹	Ballast	Fusing	Shielding
6= Cirque	W= Wall	1= 1 Lamp 2= 2 Lamps	T8= T8 T5= T5 T5HO= T5HO	1= 120V 2= 277V 3= 347V U= Universal	EB= Electronic Ballast (Standard) DB= Dimming Ballast	GLR= GLR GMF= GMF	S14= Contoured Baffle S26= Acrylic Lens
Light Output AI= Angle - Indirect AD= Angle - Direct			Run Length Overall Nominal Run Length ____ ft.		Emergency EM= Emergency Pack (Consult Factory)		

Notes: 1 Not all options available. Please consult your Cooper Lighting Representative for availability.


MOUNTING INFORMATION

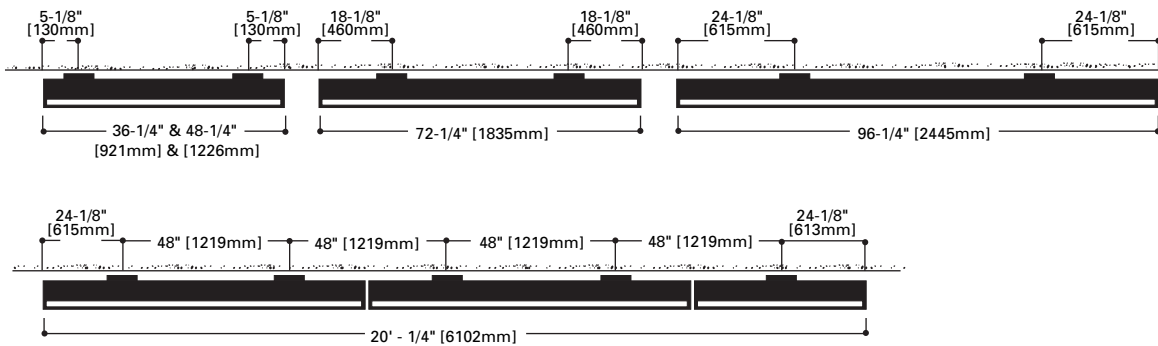

ILLUMINATED PATTERNS ARE PROVIDED IN 1 FOOT INCREMENTS PLUS CONNECTOR



SHIELDING INFORMATION



S14 Round Baffle
Lateral baffle, 1 1/2" spacing, 35° cutoff, baked white finish.



S26 Acrylic Lens
Clear acrylic ribbed lens.