




SOTO SHELVES

DSSA2410	DSSA2410H
DSSA246	DSSA246H
DSSA363	DSSA363H
DSSA1410	DSSA1410H
DSSA146	DSSA146H
DSSA143	DSSA143H

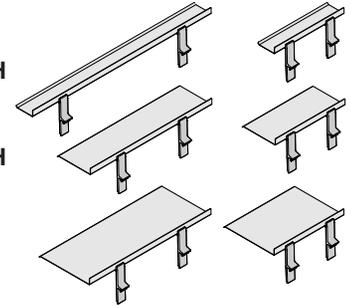

Shelf Application - Single

- 1 Insert each stanchion into each outer slot located on underside of shelf.
- 2 Place plastic filler cap into unused stanchion slot.
- 3 Place each stanchion into groove located on rail.

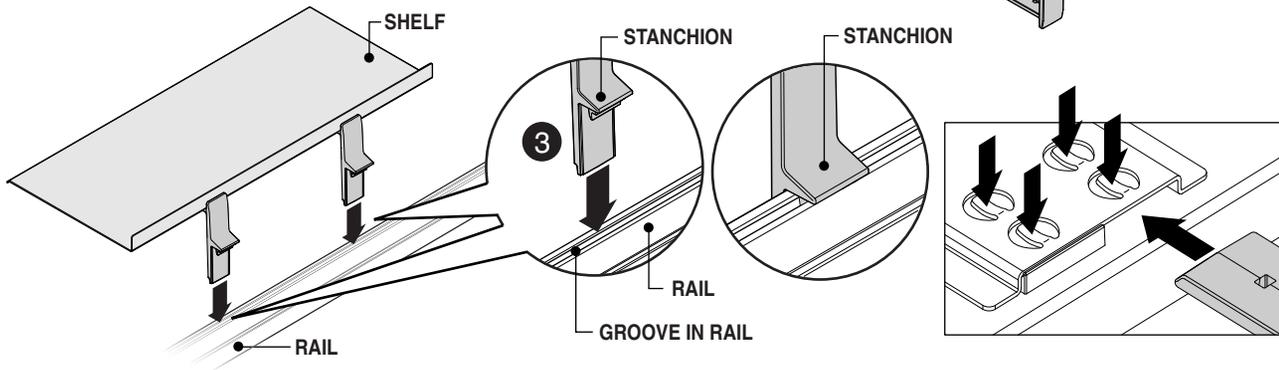
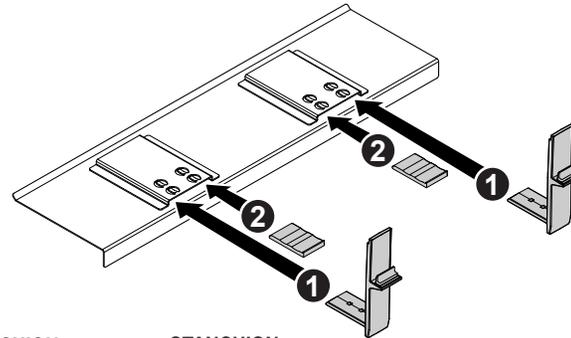


NOTE: Shelf tabs may be pressed inward, to increase holding power of stanchion interface.


NOTICE: Utilize the outer stanchion positions whenever possible, for maximum stability. If stacking one shelf over the other, the lower shelf stanchions should be placed in the inner stanchion positions.

Shelf Application - Stacking

- 1 Insert each stanchion into the inner slot of the lower shelf. Insert each stanchion into the outer slot of the upper shelf.
- 2 Place plastic filler cap into unused stanchion slot.
- 3 Place each stanchion into groove located on rail.

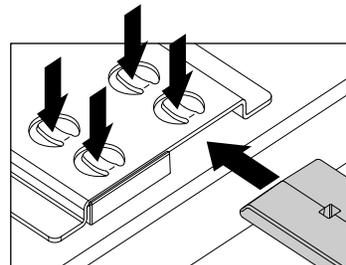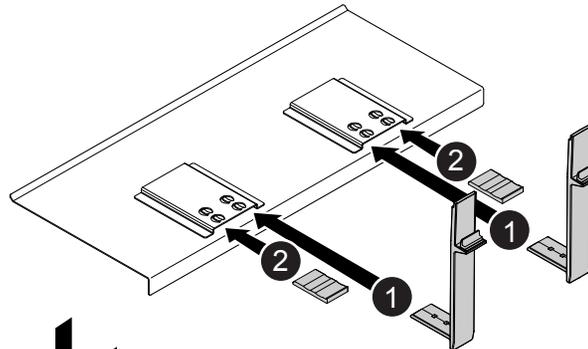

NOTE: Shelf tabs may be pressed inward, to increase holding power of stanchion interface.

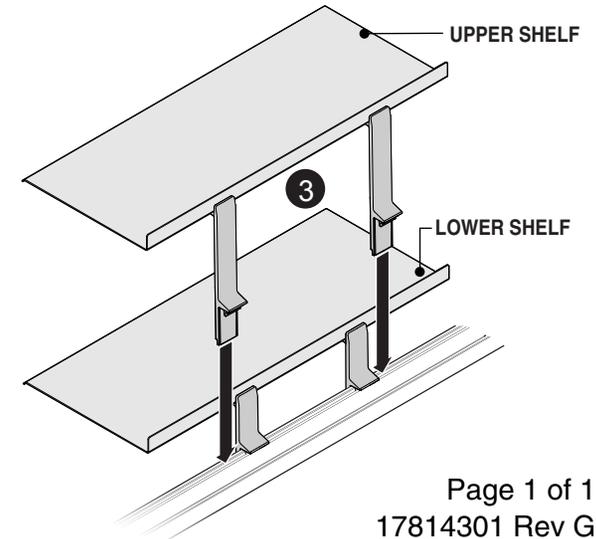

If you have a problem, question, or request, call your local dealer, or Steelcase Line 1 at **888.STEELCASE** (888.783.3522) for immediate action by people who want to help you.

(Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call: 1.616.247.2500) Or visit our website: www.steelcase.com

© 2015 Steelcase Inc.
Grand Rapids, MI 49501
U.S.A.

Printed in U.S.A.