

# Buenos Aires Mood®

## Porcelain Stone®

### Color Palette




**VS150** ▶ Polo UP



**VS152** ▶ Pampa UP




**VS155** ▶ Palermo UP - NEW



**VS157** ▶ Malbec UP - NEW




**VS150** ▶ Polo PO



**VS152** ▶ Pampa PO



**VS155** ▶ Palermo PO - NEW



**VS157** ▶ Malbec PO - NEW




**VS150** ▶ Polo TX




**VS152** ▶ Pampa TX




**VS155** ▶ Palermo TX - NEW



**VS157** ▶ Malbec TX - NEW



**VS156** ▶ Pilar UP - NEW



**VS156** ▶ Pilar PO - NEW



**VS156** ▶ Pilar TX - NEW


### Features and Benefits

- Multistrato Technology creates subtle shading, fluidity, and movement within each color
- Consistency of color and visual image for blended, aesthetically pleasing installations
- All sizes are rectified and modular with a minimum of 3mm grout joint
- Globally sourced

# Buenos Aires Mood®

## Porcelain Stone®

### Sizes Shown in VS150 Polo



### Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



### Sizes & Finishes

Field Tile	Available in all colors		
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
12 x 12	297 x 297	10.5	PO, UP
12 x 24	297 x 597	10.5	PO, UP, TX*
24 x 24	597 x 597	10.5	PO, UP

Note: All field tile is rectified and modular with a minimum 3mm grout joint. Actual measurements stated in inches indicate tile is calibrated (non-rectified). Actual measurements stated in mm indicate tile is rectified.  
\* TX Finish only available in 12 x 24.

### Mosaics and Mosaic Border

Nominal (in)	Actual (mm)	Sheet (mm)	Thickness (mm)	Finish
2 x 2 Mosaics**	47 x 47	297 x 297	10.5	UP only

\*\* 2 x 2 mosaics are mounted on 12 x 12 sheets with UP finish only.

### Coordinating Trim

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	97 x 597	10	PO, UP
6 x 12 Cove Base	150 x 298	10	UP
6 x 8 Cove Base Left & Right	150 x 200	10	UP



4 x 24 Single Bullnose



6 x 12 Cove Base (Universal, flat top)



6 x 8 Cove Base Corner Left



6 x 8 Cove Base Corner Right

### Product Performance


Breaking Strength	≥425 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.10%	ASTM C373
Scratch Hardness	8	Mohs Scale

### Wet Dynamic Coefficient of Friction Range

PO	0.31 - 0.41	AcuTest <sup>sm</sup>
UP	0.50 - 0.60	AcuTest <sup>sm</sup>
TX	0.50 - 0.60	AcuTest <sup>sm</sup>

### Shade & Texture Index

Buenos Aires Mood® has a shade variation of V3.

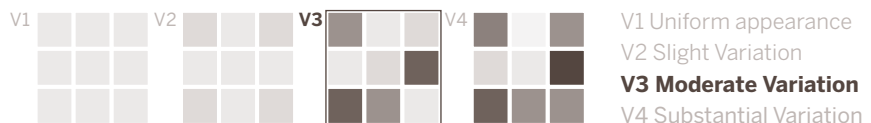

# Buenos Aires Mood®

**Crossville, Inc.**

PO Box 1168  
Crossville, TN  
38557

**Phone** 931.484.2110  
**Fax** 931.456.2956  
**E-Mail** [Crossc@CrossvilleInc.com](mailto:Crossc@CrossvilleInc.com)  
**Web** [CrossvilleInc.com](http://CrossvilleInc.com)

## Recommended Use

Buenos Aires Mood® PO & UP are recommended for interior walls and floors and exterior walls in both commercial and residential applications. Buenos Aires Mood® TX is recommended for interior and exterior walls and floors and exterior paving. **The polished finish is not recommended for wet areas where standing water may occur.** If offset pattern is required for tiles 18 inches or longer, Crossville® recommends an offset of not greater than 33%. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage. See [CrossvilleInc.com](http://CrossvilleInc.com) for detailed installation instructions.

## Wet area use for Buenos Aires Mood 2 x 2 Unpolished Mosaics

Crossville® produces the Buenos Aires Mood® 2 x 2 mosaics with an unpolished finish. The AcuTest<sup>sm</sup> wet Dynamic COF of Buenos Aires Mood® unpolished is  $\geq .50$ . Their small 2 x 2 size ensures frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning. This information is provided so that customers may make a realistic and informed decision when comparing Buenos Aires Mood to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.



**VS150** ▶ Polo 24 x 24 UP and **VS157** ▶ Malbec 12 x 24 UP

## Care and Maintenance

Regular cleaning is the best way to keep Buenos Aires Mood® tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More Information regarding the care and maintenance of Crossville® products is available at [CrossvilleInc.com](http://CrossvilleInc.com).

## Hydrotect

Our porcelain tiles are available with Hydrotect™. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at [CrossvilleInc.com](http://CrossvilleInc.com).



**VS157** ▶ Malbec 12 x 24 TX

## National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

## Exterior Cladding

Crossville's Porcelain Stone® Exterior Cladding Systems are suitable for virtually any conventional masonry application. When used in conjunction with our exterior cladding systems, Crossville's Porcelain Stone offers clear advantages: decreased construction costs, less site disturbance, low-to-zero maintenance after installation, accelerated construction schedules and greater strength than traditional masonry.

## Crossville® Sample Express

### Sample fulfillment & Help Line

[Samples@CrossvilleInc.com](mailto:Samples@CrossvilleInc.com)  
1 800 221.9093

### Loose Samples for Architects & Designers

### Loose Tile Samples

Sizes may vary depending on product series  
Max. of 4 large field tile per order

### Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

### Standard Shipping

UPS Ground

## Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at [CrossvilleInc.com](http://CrossvilleInc.com).

*Information listed here is subject to change.*

*Please refer to [CrossvilleInc.com](http://CrossvilleInc.com) for the latest, most accurate information.*

## Trade Organizations



## Environmentally Aware

