

CREATION LIVING

LOW TRAFFIC APPLICATION LVT

gerflorusa.com



Gerflor[®]
the flooring group



MARBLELOUS



HYBRID
TEXTILE
EFFECT



TRUE WOOD GRAIN
VENEER EFFECT WITH
MATCHING EMBOSSING



WATERCOLOR
TONE VARIATION
EFFECT

LONG EFFECT

LIVING

Creation Living
A new LVT collection for
low-traffic applications

EXCLUSIVE EMBOSSINGS FOR MORE REALISTIC APPEARANCE



NATURAL



STAMPED



BRUSHED



STONE



GENUINE



HAMMERED



SAW EFFECT



CREATION LIVING

CREATION LIVING



AMADOR



0737 ALAMO ASH STAMPED  7.244" X 48" 



0490 BOOGIE BRUSHED  7.244" X 48" 



0447 AMADOR SAW EFFECT  6" X 36" 



0738 ALAMO SAND STAMPED  7.244" X 48" 



0493 FLAMENCO SAW EFFECT  6" X 36" 



0749 BOSTONIAN NATURAL  7.244" X 54" 



BOSTONIAN





0741 TIMBER RUST BRUSHED  4.5" X 24" 



0742 TIMBER CAMEL BRUSHED  4.5" X 24" 



0740 ROYAL OAK COFFEE GENUINE  7.244" X 48" 



0739 ROYAL OAK GOLD GENUINE  7.244" X 48" 



0498 TANGO NATURAL  6" X 36" 



0265 MORRIS NATURAL  6" X 36" 



TIMBER RUST



ROYAL OAK GOLD



CREATION LIVING

CREATION LIVING



TWIST



0488 FOLK NATURAL  6" X 36" 




0504 TWIST NATURAL  6" X 36" 




0588 BOSSA NOVA SAW EFFECT  7.244" X 48" 



0347 BALLERINA NATURAL  6" X 36" 

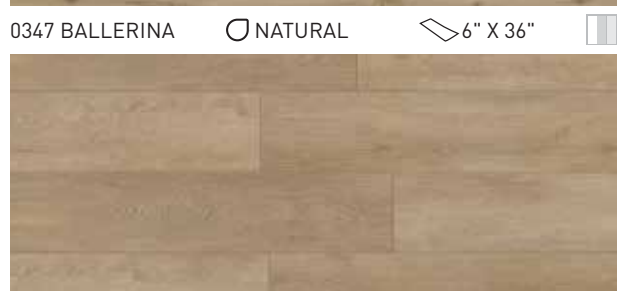


0441 HONEY OAK NATURAL  6" X 36" 

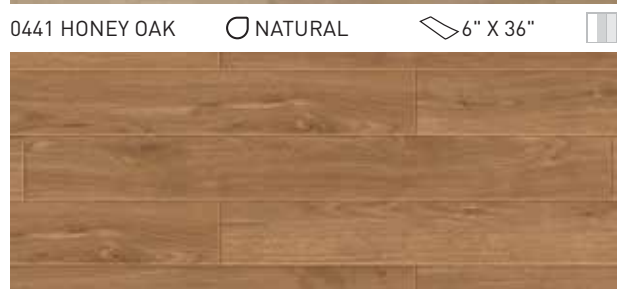

0349 MAZURKA NATURAL  6" X 36" 



0586 TAMOURE BRUSHED  7.244" X 48" 



0744 CARRARE STONE  12" X 24" 



0414 SOPRANO HAMMERED  12" X 24" 



0751 DURANGO TAUPE HAMMERED  24" X 24" 



0373 SILVER CITY HAMMERED  24" X 24" 



0746 PASHMINA STORM STONE  18" X 36" 



CARRARE



DURANGO TAUPE







ALAMO ASH

ROOM VISUALIZER

See your Creation in any room setting!
Visit gerflorusa.com > Design Tools > Room Visualizer.

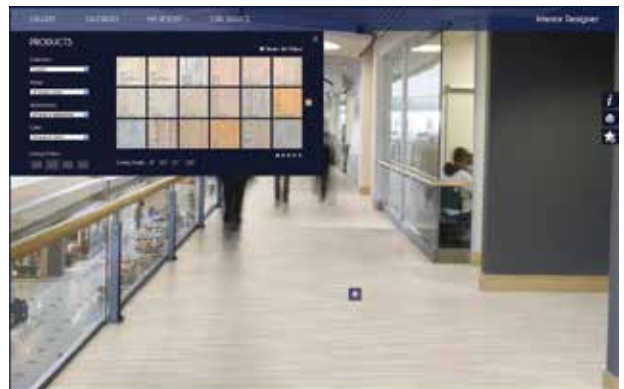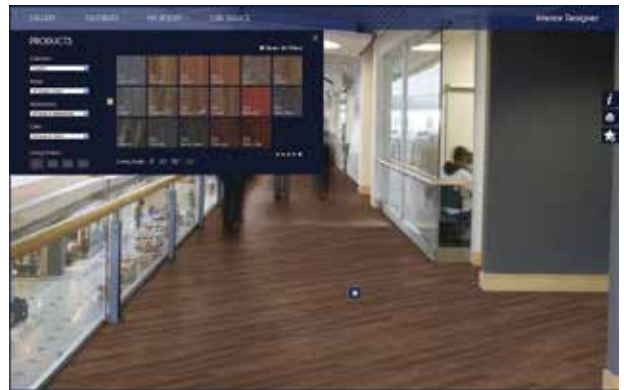

CREATION LIVING



GERFLOR USA'S CREATION LIVING LVT is a 2mm thick, low-traffic luxury vinyl tile with micro-beveled edges, available in both plank and tile format. Realistic wood and stone designs are printed in high definition on tear-resistant film, protected by a 12 mil transparent wearlayer, and supported by a compact backing made of 100% recycled materials. Creation Living is naturally antibacterial and 99% effective against the spread of infection by ISO 22196 standards. The PUR+ Surface Treatment allows for easy maintenance without waxing.

Creation Living is low VOC (TVOC after 28 days < 100µg/m3), 100% allergen-free, and REACH compliant.



- 1 PUR+ Surface Treatment**
The PUR+ treatment provides easy maintenance, without the need to wax.
- 2 12 mil Transparent Wearlayer**
Protective transparent satin-finish wearlayer is designed to stand up to low-traffic in multi-living applications.
- 3 High-Definition Design Layer**
The latest high-definition printing technology on tear-resistant film provides the most realistic looking wood and stone designs to bring your interiors to life.
- 4 100% Recycled Compact Backing**
- 5 Grained and Pressed at High Pressure with 7 Realistic Embossings**

COLOR TONE VARIATION LEGEND

New Color Tone Variation icons indicate whether the design has a light-, medium- or high-contrast effect.





Realistic wood grain veneer
with matching embossing.

ROYAL OAK

CREATION LIVING



DESCRIPTION	STANDARDS	REQUIREMENTS	CREATION LIVING
PRODUCT DESCRIPTION			Micro-beveled Luxury Vinyl Tiles and Planks for low-traffic applications
Reference Specification	ASTM F1700		CLASS III TYPE B
Surface Treatment / Maintenance	—		PUR+
Backing	ASTM F 1303		100% made from recycled material
Gauge Total Thickness	ASTM F386		0.080" (2.0 mm)
Wearlayer Thickness	ASTM F410		12mil (0.3 mm)
Plank and tile sizes	—		4.5" X 24"; 6" X 36"; 7.244" X 48"; 7.244" x 54" 12" x 24"; 24" x 24"; 18" x 36"
Weight	—		0.7 lbs/sqf (3.46kg/sqm)
PERFORMANCE			
Indentation – Residual (75 lbs)	ASTM 1914	≤ -8%	Meets requirements
Static Load (250 psi)	ASTM F970	≤ 0.005 in.	Meets requirements
Coefficient of Friction	ASTM D2047		0.65 (Dry) / 0.72 (Wet)
Impact insulation class (IIC)	ASTM E989 (ASTM E492)		40dB
Chemical & Stain Resistance (5 min and 24 hours)	ASTM F925		Meets requirements
Fire rating	ASTM E648	Class I	Class 1
Smoke Density (Flaming and non Flaming)	ASTM E662		Meets requirements
ENVIRONMENT HEALTH & SAFETY			
Naturally antibacterial; Combats MRSA, E. coli, and S. aureus*	ISO 22196	—	Inhibits spread of infections at 99%
Allergen Free			100% allergen free
Plant Certifications			ISO 14001, ISO 9001
Production Waste			100% manufacturing waste recycled
End of life			100% recyclable
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			
Sourcing of Raw Materials: Recycled content	MR 4 LEED v3 or Sourcing LEED v4		45%
Restriction Use of Harmful Chemicals	Materials LEED v4		100% REACH compliant
Environmental Product Declaration (EPD)	EPD LEED v4		Available upon request
Health Product Declaration (HPD)	Materials LEED v4		Self declared
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)			
TVOC after 28 days	ISO 16000-6		<100 µg/m3
WARRANTY		10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com.	

* The implementation of an effective cleaning method is the best defense against the spread of infections.

CREATION LIVING PACKAGING DETAILS				
FORMAT OF PLANKS / TILES		NUMBER OF UNITS PER BOX	COVERAGE PER BOX	
CM	INCH		SQ M	SQ FT
11.4 x 61	4.5" X 24"	48	3.34	35.95
15.2 x 91.4	6" x 36"	24	3.34	35.95
18.4 x 121.9	7.244" x 48"	15	3.37	36.27
18.4 x 137.1	7.244" x 54"	12	3.03	32.61
30.5x61	12" x 24"	18	3.34	35.95
61 x 61	24" x 24"	9	3.34	35.95
45.7 x 91.4	18" x 36"	8	3.34	35.95



NO heavy metals, CMR 1, or CMR 2



ISO 22196



GERFLOR USA
877.437.3567
info@gerflorusa.com

gerflorusa.com



Committed to Sustainable Development



Follow us on social media!

Gerflor[®]
theflooringgroup