


TARAFLEX® SPORT M PERFORMANCE

MADE FOR COMPETITIVE SPORTS LEVEL

Taraflex® Sport M Performance is the outcome of more than 60 years' experience.

- ▶ **ASTM F2772 Class 3:** ≥ 34% – < 46% shock absorption
- ▶ Ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 82%
- ▶ Dual density foam
- ▶ Provides superior safety and shock absorption
- ▶ Triple-Action **Protēcsol**® for anti-friction burns
- ▶ Great for permanent and portable volleyball courts
- ▶ Available with Dry-Tex™ System for the highest moisture tolerance: 100% RH (25 lb)
- ▶ Available with Taraflex® Triple Strength Fiberglass **D-Max+**

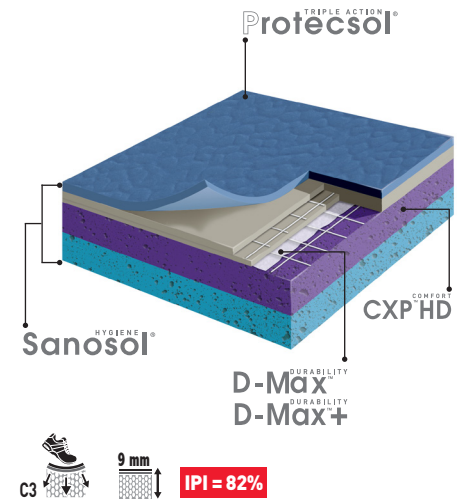

TARAFLEX® SPORT M PERFORMANCE

MADE FOR COMPETITIVE SPORTS LEVEL

COMFORT DURABILITY DURABILITY
CXP^{HD} D-Max[™] D-Max⁺
TRIPLE ACTION[®] HYGIENE[®]
Protectsol[®] Sanosol[®]

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max ^{DURABILITY} / D-Max ^{DURABILITY} +	
Foam Backing	-	-	Double Density CXP ^{COMFORT} HD	
Total Thickness	-	-	0.35" (9 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	1.1 lb/ft² (5.4 kg/m²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86'6" (26.4 m)	67'3" (20.5 m)
SPORT PROPERTIES				
Sport Properties	ASTM F2772	Class 1	Class 3	
Safety	ASTM F2772	≥ 10%	≥34% - <46%	
Vertical Deformation	ASTM F2772	≤ 0.12" (≤ 3 mm)	≤ 0.12" (≤ 3 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	82%	
Anti-Friction Burns	-	-	Protec ^{TRIPLE ACTION} sol [®]	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	-	-	
Static Load (250 psi)	ASTM F970	-	-	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	Protec ^{TRIPLE ACTION} sol [®] / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol ^{HYGIENE} : Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4		18%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT	
Dry-Tex™ System	ASTM F2170 (F1869)	≤ 100% RH (≤ 25 lb)		
Eco-Fit™ System	-	-		
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			