


TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTI-PURPOSE

Taraflex® Sport M Plus provides good levels of comfort and safety suited to all types of sports combined with some multi-purpose activities.

- ▶ **ASTM F2772 Class 2:** ≥ 22% – < 34% shock absorption
- ▶ Ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 73%
- ▶ Dual density foam
- ▶ No wax for life—ease of maintenance
- ▶ Available with the Dry-Tex™ System
 - ▶ Highest moisture tolerance: 100% RH (25 lb)
 - ▶ Up to 70% cost savings compared to third party mitigation systems
 - ▶ Full-spread adhesive installation method: no risk of mold

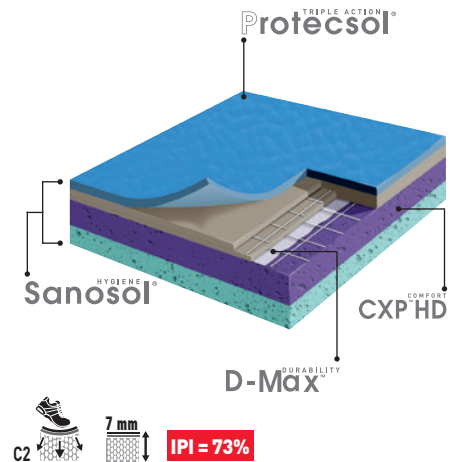

TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTI-PURPOSE

COMFORT CXP^{HD} DURABILITY D-MaxTM TRIPLE ACTION[®] ProtecSol[®] HYGIENE[®] Sanosol[®]

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max ^{DURABILITY}	
Foam Backing	-	-	Double Density CXP ^{COMFORT} HD	
Total Thickness	-	-	0.27" [7 mm]	
Wearlayer Thickness	-	-	0.08" [2.1 mm]	
Weight	-	-	0.95 lb/ft² [4.6 kg/m²]	
Roll Width	-	-	4' 11" [1.5 m]	
Roll Length	-	-	86'6" [26.4 m]	67'3" [20.5 m]
SPORT PROPERTIES				
Sport Properties	ASTM F2772	Class 1	Class 2	
Safety	ASTM F2772	≥10%	≥22% - <34%	
Vertical Deformation	ASTM F2772	≤ 0.138" [≤ 3.5 mm]	≤ 0.078" [≤ 2 mm]	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	73%	
Anti-Friction Burns	-	-	ProtecSol ^{ANTIFRICTION}	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	-	< 0.005" (< 0.13 mm)	
Static Load (250 psi)	ASTM F970	-	< 0.03" (< 0.7 mm)	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	ProtecSol ^{ANTIFRICTION} / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol ^{ANTIBACTERIAL} : Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4	-	30%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT	
Dry-Tex™ System	ASTM F2170 (F1869)	100%RH (≤ 25 lb)		
Eco-Fit™ System	-	-	-	
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			