

TARAFLEX® MULTI-USE 6.2


DESIGNED FOR MULTI-USE ACTIVITIES

Taraflex® Multi-Use 6.2 offers superior resistance to furniture and rolling loads found in multi-use gyms, while providing properties like shock absorption and comfort for athletes, so there's no need to compromise

- ▶ ASTM F2772 Class 2: $\geq 22\%$ - $< 34\%$ shock absorption
- ▶ Ball bounce: $\geq 96\%$
- ▶ Impact Protection Index (IPI): 52%
- ▶ Featuring Taraflex® Triple Strength Fiberglass: **D-Max+**
 - ▶ Up to 40% improved indentation resistance and recovery to table and chairs*
 - ▶ Superior dimensional stability to rolling load typically found in multipurpose rooms

- ▶ Exclusive wood designs

*Tested according to ASTM F 970 1250 lbf comparing Taraflex® Multi-Use 6.2 to Taraflex® Sport M Plus in 0.000 mm

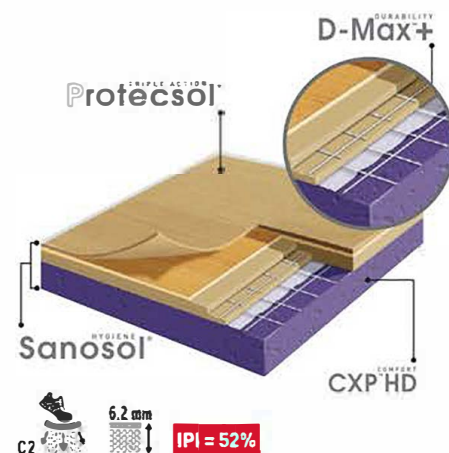

8068
Wood Chocolate

8840
Wood Black

6375
Oak Design

3708
Wood Gray

4331
Wood Natural

4453
Wood Blue

6381
Maple Design

TARAFLEX® MULTI-USE 6.2

DESIGNED FOR MULTI-USE ACTIVITIES

COMFORT DURABILITY DURABILITY
CXP^{HD} D-Max[™] D-Max⁺
TRIPLE ACTION[®] HYGIENE[®]
Protectsol[™] Sanosol[™]

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max ^{DURABILITY} / D-Max+ ^{DURABILITY}	
Foam Backing	-	-	CXP ^{COMFORT} HD	
Total Thickness	-	-	0.244" (6.2 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	0.86 lb/ft² (4.2 kg/m²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	67'3" (20.5 m)	
SPORT PROPERTIES				
Sport Properties	ASTM F2772	Class 1	Class 2	
Safety	ASTM F2772	≥ 10%	≥22% - <33%	
Vertical Deformation	ASTM F2772	≤ 0.12" (≤ 3 mm)	≤ 0.078" (≤ 2 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	52%	
Anti-Friction Burns	-	-	ProtecSol ^{TRIPLE ACTION}	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	-	<0.005" (<0.13 mm)	
Static Load (250 psi)	ASTM F970	-	<0.015" (<0.4 mm)	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	ProtecSol ^{TRIPLE ACTION} / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol ^{HYGIENE} : Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4	-	20%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT	
Dry-Tex™ System	ASTM F2170 (F1869)	≤ 100% RH (≤ 25 lb)		
Eco-Fit™ System	-	-		
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			