
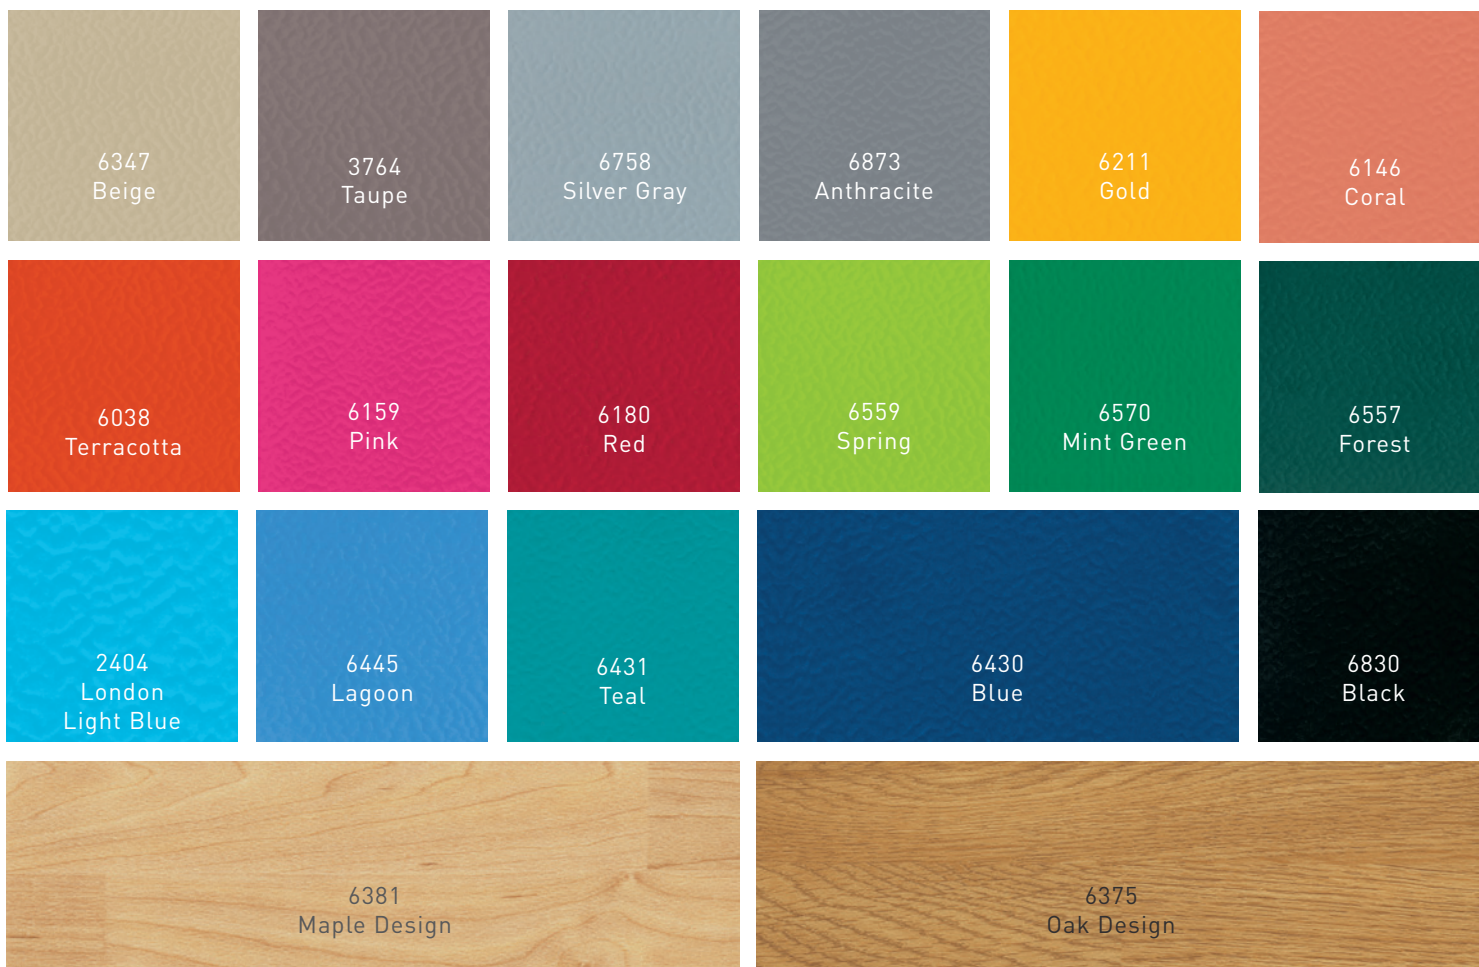


TARAFLEX® SPORT M COMFORT

MAXIMUM CUSHION, SAFETY AND INJURY PREVENTION

The first Taraflex® sports floor in ASTM F2772 C4 category. Gerflor's technology and innovation knowledge bring superior cushioning, comfort and safety during the practice of physical activities.

- ▶ Perfect for sports training camps
- ▶ **ASTM F2772 Class 4:** $\geq 46\%$ – $< 57\%$ shock absorption
- ▶ Ball bounce: $\geq 96\%$
- ▶ Impact Protection Index (IPI): 88%
- ▶ Most cushioning to prevent short term and overuse injuries
- ▶ Triple density foam

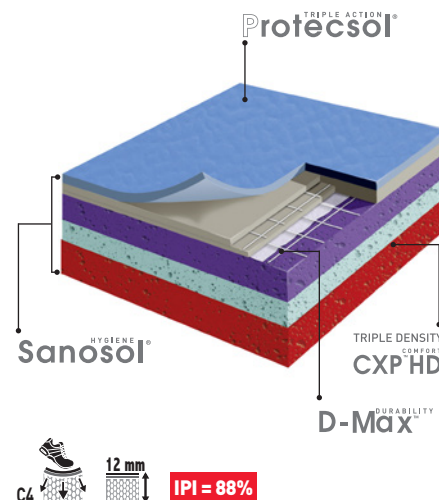

TARAFLEX® SPORT M COMFORT

MAXIMUM COMFORT, SAFETY AND INJURY PREVENTION

COMFORT CXP^{HD} DURABILITY D-Max[®]
 TRIPLE ACTION[®] HYGIENE[®] Protēcsol[®] Sanosol[®]

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max ^{DURABILITY}	
Foam Backing	-	-	Triple Density CXP ^{COMFORT} HD	
Total Thickness	-	-	0.47" (12 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	1 lb/ft² (5.1 kg/m²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86'6" (26.4 m)	
SPORT PROPERTIES				
Sport Properties	ASTM F2772	-	Class 4	
Safety	ASTM F2772	≥ 10%	≥ 46% - < 57%	
Vertical Deformation	ASTM F2772	≤ 0.138" (≤ 3.5 mm)	≤ 0.138" (≤ 3.5 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 96%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	88%	
Anti-Friction Burns	-	-	Protēcsol ^{TRIPLE ACTION}	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	-	-	
Static Load (250 psi)	ASTM F970	-	-	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	Protēcsol ^{TRIPLE ACTION} / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol ^{HYGIENE} : Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4		22%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2180 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2180 (F1869)	≤ 92% RH (≤ 10 lb)		
Dry-Tex™ System	ASTM F2180 (F1869)	≤ 98% RH (≤ 15 lb)	-	
Eco-Fit™ System	-	-	-	
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			