


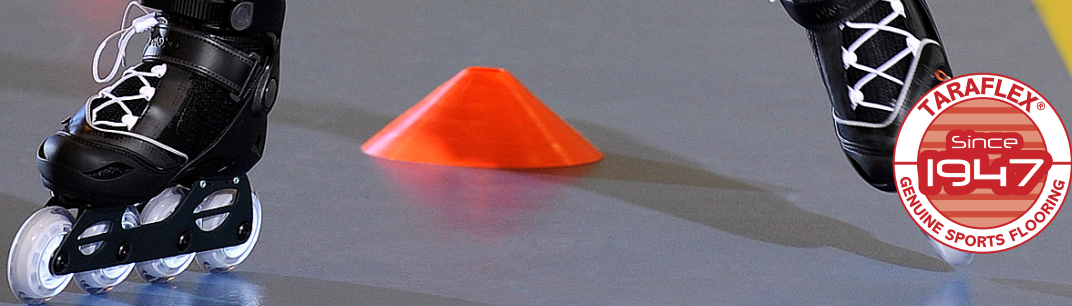


TARAFLEX® SURFACE

IDEAL FOR ROLLING SPORTS AND HEAVY LOADS SPORTS SURFACES

Taraflex® Surface is a 0.08" (2.1 mm) thick heavy duty 100% pure vinyl flooring solution. Ideal for all rolling sports: rollerblading, indoor roller hockey and wheelchair sports.

► Available in 17 solid colors and 2 wood designs

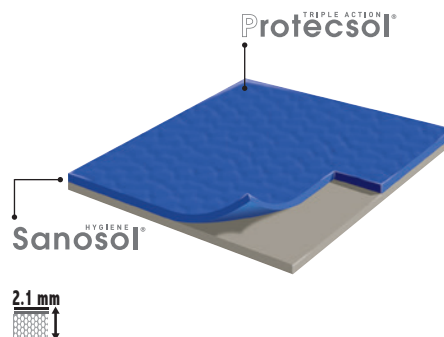

TARAFLEX® SURFACE

Protectsol[®] Sanosol[®]

IDEAL FOR ROLLING SPORTS AND HEAVY LOADS SPORTS SURFACES

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	-	
Foam Backing	-	-	-	
Total Thickness	-	-	0.08" (2.1 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	0.59 lb/f ² (2.9 kg/m ²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86' 6" (26.4 m)	67' 3" (20.5 m)
SPORT PROPERTIES				
Sport Properties	ASTM F2772	-	-	
Safety	ASTM F2772	-	-	
Vertical Deformation	ASTM F2772	≤ 3.5 mm	-	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 96%	≥ 96%	
Anti-Friction Burns	-	-	ProtecSol®	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	< 0.005" (< 0.13 mm)	< 0.003" (< 0.07 mm)	
Static Load (250 psi)	ASTM F970	-	< 0.003" (< 0.07 mm)	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	ProtecSol® / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol®: Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4		50%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2180 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2180 (F1869)	≤ 92% RH (≤ 10 lb)	-	
Dry-Tex™ System	ASTM F2180 (F1869)	≤ 98% RH (≤ 15 lb)	-	
Eco-Fit™ System	-	-	-	
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			