
ACCESSORIES

ACCESSORIES

POWER/DATA ELECTRICAL SPECIFICATIONS

ROUND GROMMET (G10)

- NACG10EL features 2 120 volt receptacles and 2 Cat5E data ports and 6' AC cord rated at 15 Amps; data ports are not pre-wired
- Field installable
- For conference tables only
- Black nylon
- Eight adapter plates are provided

ONE TOUCH PIVOTING POWER GROMMET (G12 AND G122)

- Field installable
- One touch door remains open during use
- Clear or black anodized aluminum
- (G12) Two power outlets and two blank ports can accommodate one of eight provided adapter plates
- (G122) Two power outlets, one port with two charging USB, and one blank port that can accommodate one of eight provided adapter plates
- Hardwire solution must be ordered separately and installed in the field – top should be ordered with CUT-G12C option
- Specify model number only
- Standard units have 10 ft. cords and hardwire cords have 6 ft. cords
- UL Listed

ONE TOUCH DOUBLE PIVOTING POWER GROMMET (G15 AND G152)

- UL Listed
- To be ordered with G15 cutouts
- Must be inserted and installed into cutouts in field
- Fits into CUT-G15C, CUT-G15E, CUT-G15LR, CUT-G15A, and CUT-G15CE options
- One touch door remains open during use
- Clear or black anodized aluminum available
- (G15) Two power outlets (110 volts each) and three blank ports per side can accommodate one of eight provided adapter plates
- (G152) SIDE 1: Two power outlets (110 volts each), one 2-port USB, one HDMI, one blank data port; SIDE 2: Two power outlets (110 volts each), one 2-port USB, one VGA, one blank data port
- Corded units have two 72" long power cords (one each side) rated at 15 Amps 120 volts
- Hardwire units have two 72" long power cords (one each side) rated at 15 Amps 120 volts
- Grommet comes with undersurface wire managers attached underneath conference top
- Cord is 6 ft. long
- Field installable
- For more specification information: www.byrne-electrical.com

POWER/DATA OASIS (G162)

- To be ordered with G16 cutout options
- Must be inserted and installed into cutouts in field
- Fits into CUT-G16C, CUT-G16E, CUT-G16LR, CUT-G16A, and CUT-G16CE options
- Silver or black powder coat available
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Power/Data Oasis (G162) unit will feature six power receptacles with two 108" power cords and molded plugs rated at 12 Amps 120 volts, two charging USB (2.1); one HDMI; one VGA with mini stereo, and one RJ45 data jack
- Power/Data Oasis hardwire unit (G162) will feature six power receptacles with one 72" long hardwire conduit covered pigtail cable on one end which carries two 20 Amp 120 volt circuits to power two sides of the Power/Data Oasis, two charging USB (2.1); one HDMI; one VGA with mini stereo, and one RJ45 data jack
- Standard units have cords that are 9 ft. long rated at 15 Amps 120 volts and molded plug. Hardwire units have cords that are 6 ft. long rated at 20 Amps 120 volts and molded plug
- Cannot be field scribed for cutout
- For more specification information: www.electri-cable.com

ONE TOUCH PIVOTING POWER GROMMET (G17, G172, G173)

- Field installable
- One touch door remains open during use
- Die-cast zinc in black or silver powder coat
- (G17) Includes one power outlet and one blank voice/data port
- (G172) Includes two power outlets
- (G173) Includes one power outlet and two charging USB (2.1)
- 10 foot, 15 Amp cord
- Includes a voice/adaptor kit to accept couplers and jacks when required
- UL Listed

BYRNE INTERLINK IQ SYSTEM (G17)

- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system can be used with Epic, Renegade, and WaveWorks
- Interlink IQ system must begin with NACELIQ1, NACG17ELIQ_1 or NACG172ELIQ_1 unit
- Can add a daisy chain for a total of eight NACG17ELIQ, NACG172ELIQ, or NACELIQJ units in any combination
- G17EL includes a Voice/Adapter kit to accept couplers and jacks when required
- One touch door remains open during use
- Die-cast zinc in black or silver powder coat
- Refer to page 653 in the Casegoods Book 2 Price List for electrical loading standards

POWER GROMMET (G23)

- Field installable in tables when CUT-G23 option is specified
- Die-cast zinc in black or silver powder coat
- Includes two power outlets and two power USB ports
- 9 foot, 15 Amp cord
- ETL listed to UL962A Standard

DAISY LINK (G23)

- Field installable in tables when CUT-G23 option is specified
- Die-cast zinc in black or silver powder coat
- Includes two 15 Amp power receptacles (no data) and two USB (3.0 power) power ports
- Thumbscrew version with two backerplates and two ¼"-20 thumbscrews
- 72" single circuit power cord for plugged starter unit; 48¾" conduit and 24" power cord with 20 Amp molded plug
- 72¾" multi-circuit conduit power cord for hardwire starter unit
- Add-on unit does include a 60" jumper; jumper cable is 60¾" metal conduit with female to female ends for connecting two daisy link power grommets
- ETL listed to UL962A Standard

DAISY LINK JUMPER

- 80" jumper cable is metal conduit with female to female ends to connect two daisy link power grommets when the power is jumped between tables

MARINA™ HDMI COLLABORATIVE MEETING TECHNOLOGY SOLUTION (G26)

- ETL Listed
- Must be inserted and installed into CUT-G26C cutout in field
- HDMI switcher
- Four HDMI Show Me cables, 6 ft.
- 15 ft. HDMI video output cord
- Four 15 Amp power receptacles
- Four 3.0, 2.1 Amp USB ports
- Two blank telecom plates
- 108" power cord
- Graphite Gray powder coat interior
- Powder coat bezel with sliding doors; available in silver or black
- For more specification information: www.electri-cable.com

GETAWAY™ PORTABLE MEETING TECHNOLOGY SOLUTION (G26 MOBILE)

- ETL Listed
- Freestanding portable unit
- HDMI 4 power switcher
- Four 6 ft. Show Me cables
- 15 ft. HDMI video output cord
- Four 15 Amp power receptacles
- Four 2.1 Amp USB ports
- 108" power cord
- Carrying case
- Powder coat finish; available in silver or black
- For more specification information: www.electri-cable.com

POWER TOWER

- Available in gloss black or silver with black faceplates, or gloss white with white faceplates
- Unit comes with (9) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided
- 108" 15 amp power cord included
- Circuit breaker located in the bottom of the tower for overload protection

UNDERSURFACE POWER/DATA

- Contains 1 electrical outlet and 2 USB ports
- Mounts under surface
- 72" power cord included

NODE POWER GROMMET (G33)

- For use with select Maneuver tables
- Available in black or silver
- Contains 1 electrical outlet and 2 USB ports
- 72" 15 amp power cord included
- Maximum worksurface thickness is 1½"
- UL approved

ACCESSORIES


DIMENSION KEY

D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width

SAMPLE MODEL NUMBER:

15NTVMAS


UNIVERSAL MOBILE MEDIA CART



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
		D	W	H				
10N3661MMCM Gun Metal Grey	\$ 4532	26	36¼	61	—	—	80 lbs.	9.1

- Some assembly required
- Supports one plasma or LCD screen 37" to 70"; includes mounting bracket, one adjustable height shelf, wire management in rear, adjustable camera platform, and six port power module
- Gun Metal Grey powder coat
- 5" dual wheel casters; 2 locking


FLAT PANEL WALL MOUNT KIT



15NTVMAS Black	\$ 309	15¾-47¼	15¾-31¼	—	—	25 lbs.	2.0
----------------	--------	---------	---------	---	---	---------	-----

- Adjustable Universal Wall Mount adjusts to allow installation of most 32" to 80" flat panel
- Must mount onto an architectural wall
- Black powder coat
- VESA mounting compliant

UNIVERSAL MOBILE MARKER BOARD FLIP CHART HOLDER






10N3372MBFCHB Cinder	\$ 1634	23%	32%	71¼	—	—	50 lbs.	8.6
10N3372MBFCHS Platinum Metallic	1634	23%	32%	71¼	—	—	50 lbs.	8.6
10N3372MBFCHN Satin Nickel Metallic	1634	23%	32%	71¼	—	—	50 lbs.	8.6

- Some assembly required
- High gloss, white laminate marker board
- 4 locking casters
- Adjustable brackets to hang flip chart
- Casters are black on the Cinder and Satin Nickel Metallic models; Platinum Metallic model has black casters with silver hubcaps

TO ORDER, SPECIFY:

1. Model Number

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
	NAC0711SHM	Powder Coated	\$ 258	7	11	1¼	—	—	10 lbs.	1.5
	• Available in four paint colors: (405) Designer White, (462) Cinder, (501) Platinum Metallic, or (503) Satin Nickel Metallic • 20 lb. maximum weight capacity • Only intended for use with the Mio Wall or Exhibit TV mount insert									
	NAC18TLDBPUS	Task Light w/Desktop Base, Plug/USB, Silver	\$ 884	14	—	14	—	—		
	• Available in silver • MCX LED freestanding light • Working height 18" and maximum reach 28" • 360° swivel from base, 135° front-to-back head tilt, 90° side-to-side head rotation • 1 120VAC 3 prong receptacle electrical outlet • 7 levels of light adjustment • 2 USB charging ports providing 1 Amp 5VDC of power									
	NAC18TLDBUH	Task Light w/Desktop Base, USB, White	\$ 495	11½	7½	18¼	—	—		
	• Available in white • LED freestanding light • Three color temps, dimming • 1 USB charging port that provides 5 volts and 1 Amp of charging power • 4'11" white cord plus a 3' cord extender • ETL listed, compliant to UL153, FCC Part 15									
	NAC25ELPTB	Black	\$ 2000	16¼	16¼	25½	—	—	68 lbs.	6.5
	NAC25ELPTH	White	2000	16¼	16¼	25½	—	—	68 lbs.	6.5
	NAC25ELPTS	Silver	2000	16¼	16¼	25½	—	—	68 lbs.	6.5

ACCESSORIES

DIMENSION KEY



D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width

SAMPLE MODEL NUMBER:

NACG10EL


To You In
10
DAYS
...or Less

Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered within 10 days.


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
ROUND GROMMET (G10)  NACG10EL  NACG10	NACG10EL Electrical Grommet	\$ 405	4%	4%	5	—	—	2 lbs.	0.12
	NACG10 Grommet	65	4%	4%	1%	—	—	1 lbs.	0.12
ONE TOUCH PIVOTING POWER GROMMET (G12)  NACG12EL  NACG122EL	NACG12ELS Clear Anodized Aluminum	\$ 421	4%	8%	1½	—	—	2 lbs.	0.2
	NACG12ELB Black	421	4%	8%	1½	—	—	2 lbs.	0.2
	NACG12ELHS Hardwire, Clear Anodized Aluminum	421	4%	8%	1½	—	—	3 lbs.	0.2
	NACG12ELHB Hardwire, Black	421	4%	8%	1½	—	—	2 lbs.	0.2
	NACG122ELS Clear Anodized Aluminum	\$ 525	4%	8%	1½	—	—	2 lbs.	0.2
	NACG122ELB Black	525	4%	8%	1½	—	—	2 lbs.	0.2
	NACG122ELHS Hardwire, Clear Anodized Aluminum	525	4%	8%	1½	—	—	3 lbs.	0.2
	NACG122ELHB Hardwire, Black	525	4%	8%	1½	—	—	2 lbs.	0.2

TO ORDER, SPECIFY:

1. Model Number

**BYRNE TRAINING TABLE
INTERLINK IQ SYSTEM (G12)**

NACELIQPPG18



NACELIQ2PPG18

MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
D	W	H							
NACELIQPPG18	Full Set 1-8	\$ 3631	4%	8%	1½	—	—	25 lbs.	4.0
NACELIQPPG1	Interlink Starter	592	4%	8%	1½	—	—	3 lbs.	3.0
NACELIQPPG	Interlink Add-on	456	4%	8%	1½	—	—	3 lbs.	3.0
NACELIQJ	Interlink IQ Jumper	76	—	60	—	—	—	3 lbs.	0.15
• Each power grommet includes two power outlets and two blank ports that can accommodate one of eight provided adapter plates									
NACELIQ2PPG18	Full Set 1-8	\$ 4525	4%	8%	1½	—	—	25 lbs.	4.0
NACELIQ2PPG1	Interlink Starter	945	4%	8%	1½	—	—	3 lbs.	3.0
NACELIQ2PPG	Interlink Add-on	512	4%	8%	1½	—	—	3 lbs.	3.0
• Each power grommet includes two power outlets, one port with two charging USB, and one blank port that can accommodate one of eight provided adapter plates • Non-sequential "Daisy chain" solution for flip/nest training tables • When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet • When Interlink solution is ordered, use table ganging brackets shown below • Specify model number only • Interlink cord with plug is 120" in length • Length of cord from coupler to unit on all units is 14" • Length from coupler to coupler is 60" • Only available in clear anodized aluminum									

ACCESSORIES


DIMENSION KEY

D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width


SAMPLE MODEL NUMBER:

NACG15EL

ONE TOUCH DOUBLE PIVOTING POWER GROMMET (G15 AND G152)



NACG15EL




NACG152ELS

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG15EL Clear Anodized Aluminum	\$ 843	8	9¾	1½	—	—	5 lbs.	0.4
NACG15ELB Black	843	8	9¾	1½	—	—	4 lbs.	0.4
NACG15ELH Clear Anodized Aluminum/Hardwire	843	8	9¾	1½	—	—	5 lbs.	0.4
NACG15ELHB Black/Hardwire	843	8	9¾	1½	—	—	4 lbs.	0.4
NACG152ELS Clear Anodized Aluminum	\$ 1221	8	9¾	1½	—	—	5 lbs.	0.4
NACG152ELB Black	1221	8	9¾	1½	—	—	4 lbs.	0.4
NACG152ELHS Clear Anodized Aluminum/Hardwire	1221	8	9¾	1½	—	—	5 lbs.	0.4
NACG152ELHB Black/Hardwire	1221	8	9¾	1½	—	—	4 lbs.	0.4

• See pages 520-521 for detailed specifications

POWER/DATA OASIS (G162)



NACG162ELS Silver Powder Coat	\$ 2228	9	15	4	—	—	8 lbs.	1.2
NACG162ELB Black Powder Coat	2228	9	15	4	—	—	8 lbs.	1.2
NACG162ELHS Silver Powder Coat/Hardwire	2600	9	15	4	—	—	8 lbs.	1.2
NACG162ELHB Black Powder Coat/Hardwire	2600	9	15	4	—	—	8 lbs.	1.2


• See pages 520-521 for detailed specifications

• The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit

TO ORDER, SPECIFY:

1. Model Number

**HARDWIRE POWER/DATA OASIS
DAISY CHAIN KITS (G16)**



MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS						CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW			
SILVER POWDER COAT BLACK POWDER COAT										
NACG162ELHS120LR	NACG162ELHB120LR	\$ 5305	9	15	4	—	—	41 lbs.	5.4	
NACG162ELHS144LR	NACG162ELHB144LR	5305	9	15	4	—	—	42 lbs.	5.4	
NACG162ELHS168LR	NACG162ELHB168LR	5305	9	15	4	—	—	42 lbs.	5.4	
NACG162ELHS168A	NACG162ELHB168A	8248	9	15	4	—	—	50 lbs.	6.7	
NACG162ELHS168CE	NACG162ELHB168CE	5305	9	15	4	—	—	41 lbs.	5.4	
NACG162ELHS192LR	NACG162ELHB192LR	5305	9	15	4	—	—	43 lbs.	5.4	
NACG162ELHS192A	NACG162ELHB192A	8248	9	15	4	—	—	50 lbs.	6.7	
NACG162ELHS192CE	NACG162ELHB192CE	5305	9	15	4	—	—	41 lbs.	5.4	
NACG162ELHS216LR	NACG162ELHB216LR	5305	9	15	4	—	—	43 lbs.	5.4	
NACG162ELHS216A	NACG162ELHB216A	8248	9	15	4	—	—	50 lbs.	6.7	
NACG162ELHS216CE	NACG162ELHB216CE	5305	9	15	4	—	—	41 lbs.	5.4	
NACG162ELHS240LR	NACG162ELHB240LR	5305	9	15	4	—	—	43 lbs.	5.4	
NACG162ELHS240A	NACG162ELHB240A	8248	9	15	4	—	—	50 lbs.	6.7	
NACG162ELHS240CE	NACG162ELHB240CE	5305	9	15	4	—	—	41 lbs.	5.4	

- Example Model: NACG162ELHS**120LR** (**120** - designates size of table top; **LR** - designates grommet locations); see pages 20-21 for details
- G16 Grommet CUTOUTS must be specified in the conference top in which the Power/Data Oasis units will be installed
- Kits include jumper cables and hardwire starter cable required to daisy chain the Power/Data Oasis units
- "LR" models include 2 Oasis units, "A" models include 3 Oasis units and "CE" models include 2 Oasis units




ACCESSORIES

DIMENSION KEY

D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width

SAMPLE MODEL NUMBER:



NACG17ELB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
ONE TOUCH PIVOTING POWER/DATA GROMMET (G17) 	NACG17ELB Black Powder Coat	\$ 293	4¼	5¼	2½	—	—	1 lbs.	0.2
	NACG17ELS Silver Powder Coat	293	4¼	5¼	2½	—	—	1 lbs.	0.2
	• Includes one power outlet and one blank voice/data port								
ONE TOUCH PIVOTING POWER GROMMET (G172) 	NACG172ELB Black Powder Coat	\$ 298	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG172ELS Silver Powder Coat	298	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Includes two power outlets								
ONE TOUCH PIVOTING POWER GROMMET (G173) 	NACG173ELB Black Powder Coat	\$ 305	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG173ELS Silver Powder Coat	305	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Includes one power outlet and two charging USB (2.1)								

TO ORDER, SPECIFY:

1. Model Number

BYRNE INTERLINK IQ SYSTEM (G17)




MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
FULL SET OF EIGHT UNITS									
NACG17ELIQB18	Black - G17	\$ 2373	4¼	5¼	2½	—	—	19 lbs.	1.55
NACG17ELIQS18	Silver - G17	2373	4¼	5¼	2½	—	—	19 lbs.	1.55
NACG172ELIQB18	Black - G172	2509	4¼	5¼	2½	—	—	19 lbs.	1.55
NACG172ELIQS18	Silver - G172	2509	4¼	5¼	2½	—	—	19 lbs.	1.55
INTERLINK STARTER UNITS									
NACG17ELIQB1	Black - G17	\$ 365	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17ELIQS1	Silver - G17	365	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG172ELIQB1	Black - G172	381	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG172ELIQS1	Silver - G172	381	4¼	5¼	2½	—	—	3 lbs.	0.15
INTERLINK ADD-ON UNITS									
NACG17ELIQB	Black - G17	\$ 287	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17ELIQS	Silver - G17	287	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG172ELIQB	Black - G172	304	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG172ELIQS	Silver - G172	304	4¼	5¼	2½	—	—	3 lbs.	0.15
INTERLINK IQ STARTER AND JUMPER									
NACELIQ1	Interlink IQ starter plug	\$ 182	—	120	—	—	—	3 lbs.	0.15
NACELIQJ	Interlink IQ Jumper	76	—	60	—	—	—	3 lbs.	0.15


- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system can be used with Epic, Renegade, and WaveWorks
- Interlink IQ system must begin with NACELIQ1, NACG17ELIQ_1 or NACG172ELIQ_1 unit
- Can add a daisy chain for a total of eight NACG17ELIQ, NACG172ELIQ, or NACELIQJ units in any combination
- G17EL includes a Voice/Adapter kit to accept couplers and jacks when required
- One touch door remains open during use
- Die-cast zinc in black or silver powder coat
- Refer to page 653 in the Casegoods Book 2 Price List for electrical loading standards
- Jumper only used between the starter and add-on units when the span between grommet locations are greater than 60"

ACCESSORIES


Configuration of Byrne IQ System for 72" WaveWorks Training Tables - Max of 6 Byrne IQ Units per run

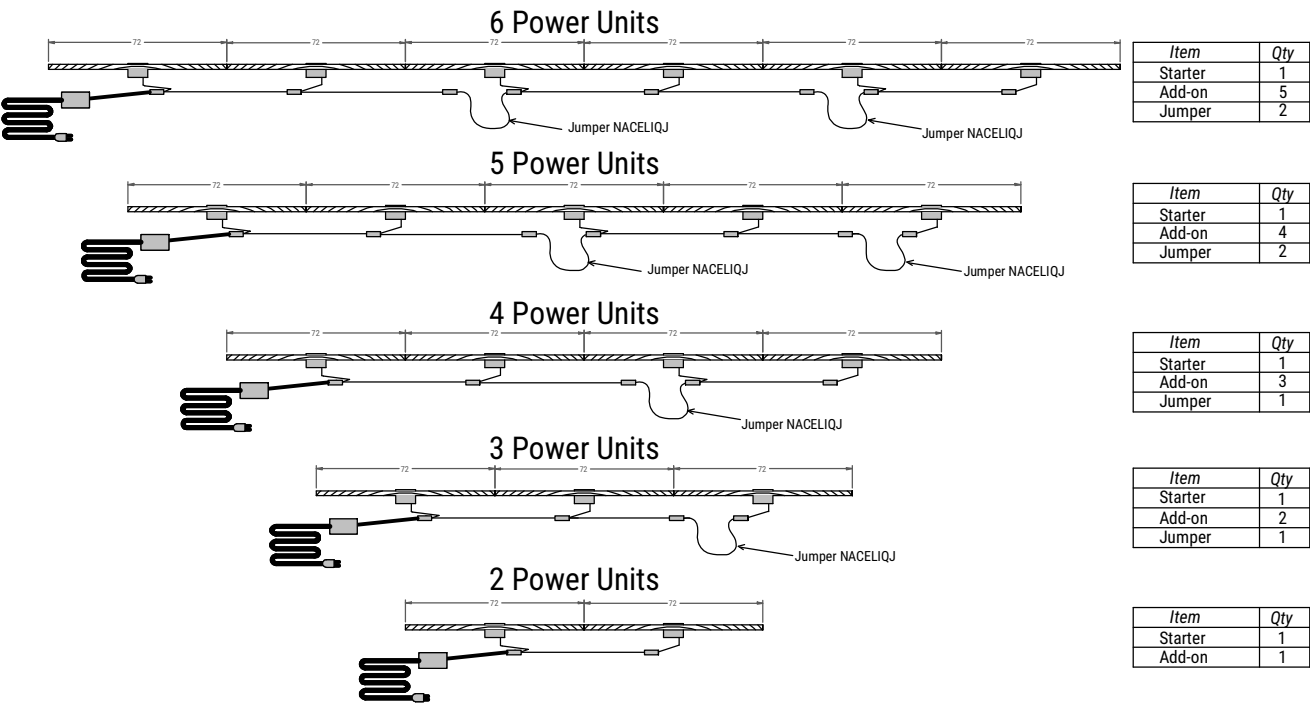

Configuration of Byrne IQ System for 66" WaveWorks Training Tables - Max of 6 Byrne IQ Units per run

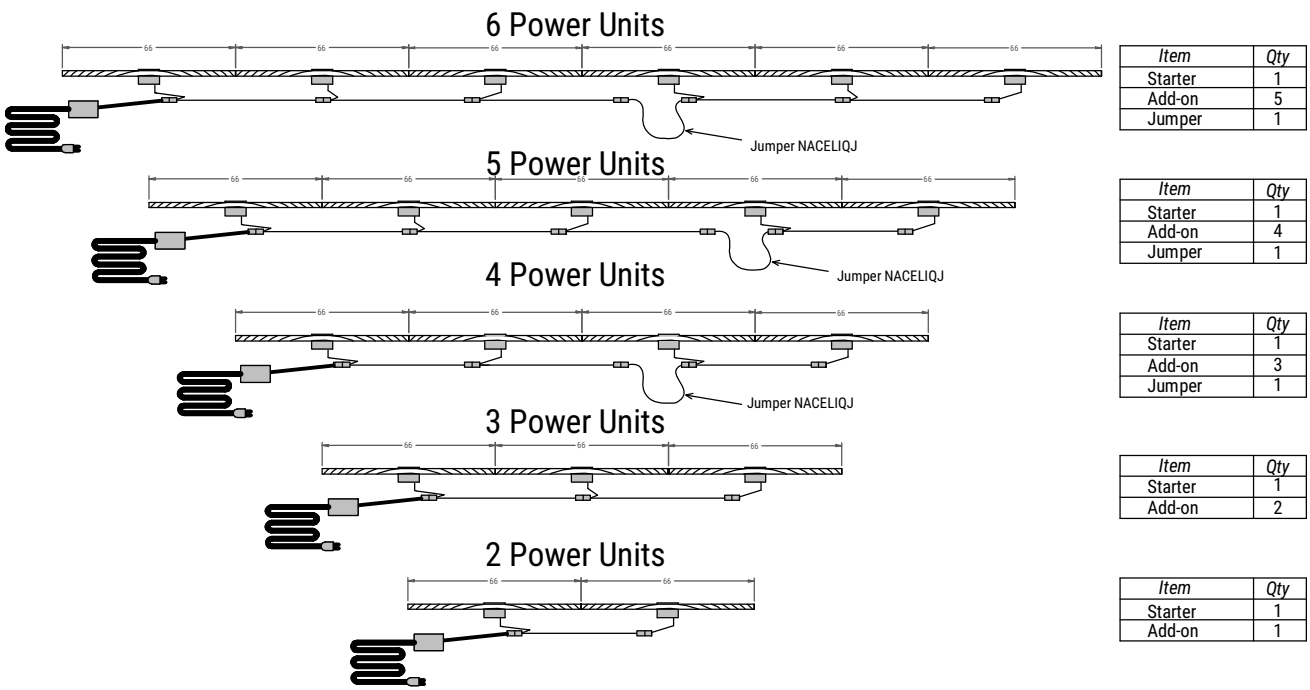

Configuration of Byrne IQ System for 60" WaveWorks Training Tables - Max of 8 Byrne IQ Units per run

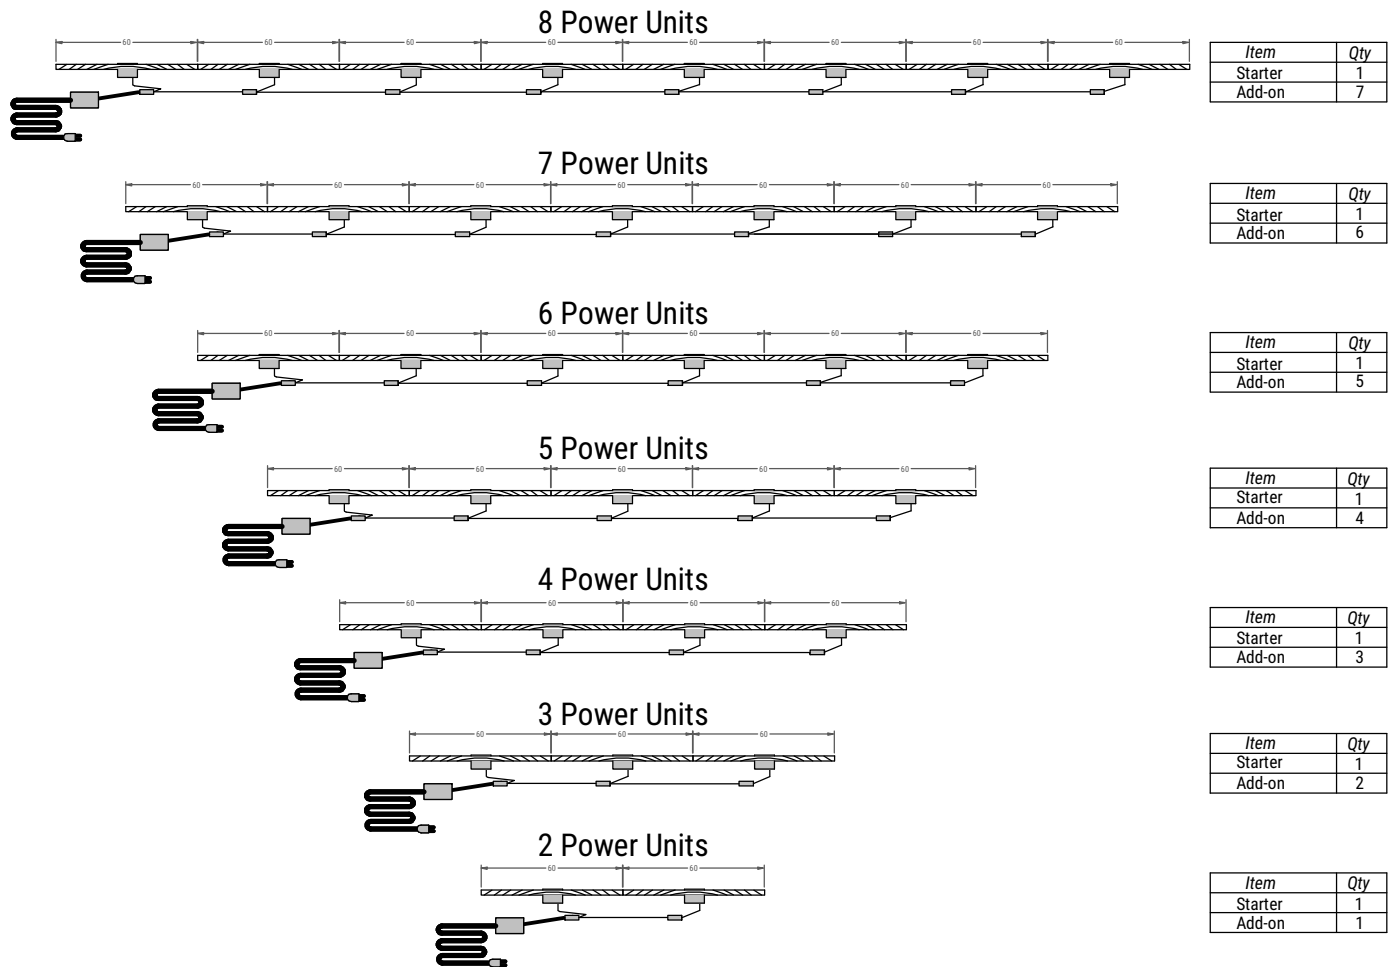

ACCESSORIES


DIMENSION KEY

D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width

SAMPLE MODEL NUMBER:

NACG23ELB

POWER GROMMET (G23)



MODEL NO./DESCRIPTION

LIST
PRICE

DIMENSIONS

D

W

H

A

KW


CARTONED
WEIGHT

CUBIC
FEET

NACG23ELB	Black	\$ 431	2½	4½	3¼	—	—	2.3 lbs.	0.2
NACG23ELS	Silver	431	2½	4½	3¼	—	—	2.3 lbs.	0.2

- Not intended for use on conference tables
- Includes two power outlets and two power USB ports

DAISY LINK (G23)



DAISY LINK STARTER UNITS

NACG23ELDLB1	Black - G23, Plugged	\$ 490	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLS1	Silver - G23, Plugged	490	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLHB1	Black - G23, Hardwire	490	2½	4½	3¼	—	—	3.7 lbs.	0.4
NACG23ELDLHS1	Silver - G23, Hardwire	490	2½	4½	3¼	—	—	3.7 lbs.	0.4

DAISY LINK ADD-ON UNITS/JUMPER KIT

NACG23ELDLB2	Black - G23	\$ 515	2½	4½	3¼	—	—	2.3 lbs.	0.4
NACG23ELDLS2	Silver - G23	515	2½	4½	3¼	—	—	2.3 lbs.	0.4


- 60" jumper included with each daisy link add-on unit

DAISY LINK JUMPER (80")

NACG80ELDLJ	Daisy Chain Jumper	\$ 180	¾	80	2	—	—	2.4 lbs.	0.4
-------------	--------------------	--------	---	----	---	---	---	----------	-----

- 80" jumper is needed when connecting power between tables

NODE POWER GROMMET (G33)





NACG33ELB	Black	\$ 275	4	4	3½	—	—	1 lbs.	0.2
NACG33ELS	Silver	275	4	4	3½	—	—	1 lbs.	0.2

- For use with Maneuver gear, shield, and 120 degree tables when CUT-G33 option is specified

TO ORDER, SPECIFY:

1. Model Number

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
MARINA™ HDMI COLLABORATIVE MEETING TECHNOLOGY SOLUTION 	NACG26ELB	Black	\$ 7210	8	14	7 ¹⁵ / ₁₆	—	—	20 lbs.	2.4
	NACG26ELS	Silver	7210	8	14	7 ¹⁵ / ₁₆	—	—	20 lbs.	2.4
	• See pages 520-521 for detailed specifications									
GETAWAY™ PORTABLE MEETING TECHNOLOGY SOLUTION 	NACG26ELMB	Black	\$ 7725	12	14 ⁷ / ₈	4	—	—	18 lbs.	1.2
	NACG26ELMS	Silver	7725	12	14 ⁷ / ₈	4	—	—	18 lbs.	1.2
	• See pages 520-521 for detailed specifications									
UNDERSURFACE WIRE MANAGER 	NAC0403WM	Set of two	\$ 40	4	2 ⁵ / ₈	1 ³ / ₄	—	—	1 lbs.	0.1
	• Specify model number only • Black • When one touch pivoting power grommet or CUT-G12C option is ordered with flip/nest table, two undersurface wire managers are installed on underside of surface									
VERTICAL WIRE MANAGER 	NAC0318WMV	Cinder	\$ 176	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVS	Platinum Metallic	176	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVN	Satin Nickel Metallic	176	—	3	18	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Clamps to leg; no hardware required									
MESH WIRE MANAGER 	NAC0318WMM	Black	\$ 85	—	3	17½	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Wraps around leg and is secured with Velcro®									

ACCESSORIES

DIMENSION KEY


D	Depth
W	Width
H	Height
A	Overhang: Approach Side
KW	Kneespace Width
DI	Diameter

SAMPLE MODEL NUMBER:

NAC7232PVMCP 1 1677 501

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				

VERTICAL WIRE MANAGER



- Graphite color
- Attaches to underside of worksurface; flexible; used to conceal power in-feed and data cables


HORIZONTAL WIRE MANAGER



NAC17WMH	Black Plastic	\$ 48	2½	17	4¼	—	—	3 lbs.	0.5
NAC24WMH	Black Plastic	56	2½	24	4¼	—	—	3 lbs.	0.5

- Attaches below worksurface; can be installed horizontally or vertically
- Used to conceal power in-feed and data cables

EDGE MOUNTED PRIVACY/MODESTY SCREEN RECTANGULAR, RESIN



GRADE 1



NAC7232PVMCP	\$ 1198	¾	72	32	—	—	46 lbs.	6.0
NAC6632PVMCP	1139	¾	66	32	—	—	34 lbs.	5.5
NAC6032PVMCP	1082	¾	60	32	—	—	32 lbs.	5.1
NAC5432PVMCP	1023	¾	54	32	—	—	30 lbs.	4.6
NAC4832PVMCP	964	¾	48	32	—	—	28 lbs.	4.1
NAC4232PVMCP	906	¾	42	32	—	—	26 lbs.	3.7
NAC3632PVMCP	845	¾	36	32	—	—	24 lbs.	3.2
NAC3032PVMCP	786	¾	30	32	—	—	22 lbs.	2.8
NAC2732PVMCP	755	¾	27	32	—	—	22 lbs.	2.5
NAC2432PVMCP	723	¾	24	32	—	—	20 lbs.	2.3
NAC2132PVMCP	695	¾	21	32	—	—	18 lbs.	2.1

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Cinder (462), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are ¾" thick dual sided resin; the overall assembly thickness, including the holders, is 1½"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1½" and 1¾" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 12" below the surface


TO ORDER, SPECIFY:

1. Model Number
2. Fabric or Resin Grade/Color
3. Paint Color

• See page 425 for fabrics



Shaded rectangle portrays a railroad privacy/modesty screen.

**EDGE MOUNTED
PRIVACY/MODESTY SCREEN
RECTANGULAR, FABRIC**

MODEL NO./DESCRIPTION				LIST PRICE	DIMENSIONS				A	KW	CARTONED WEIGHT	CUBIC FEET
				D	W	H						
GRADE A		GRADE B/COM										
NAC7232PVMC2PFA	Railroad	\$	2118	\$	2241	1½	72	32	—	—	46 lbs.	6.0
NAC6632PVMC2PFA	Railroad	\$	1982	\$	2098	1½	66	32	—	—	34 lbs.	5.5
NAC6032PVMC2PFA	Railroad	\$	1850	\$	1954	1½	60	32	—	—	32 lbs.	5.1
NAC6032PVMC2PF	Standard		1845		1903	1½	60	32	—	—	32 lbs.	5.1
NAC5432PVMC2PFA	Railroad	\$	1714	\$	1808	1½	54	32	—	—	30 lbs.	4.6
NAC5432PVMC2PF	Standard		1709		1767	1½	54	32	—	—	30 lbs.	4.6
NAC4832PVMC2PFA	Railroad	\$	1578	\$	1665	1½	48	32	—	—	28 lbs.	4.1
NAC4832PVMC2PF	Standard		1572		1630	1½	48	32	—	—	28 lbs.	4.1
NAC4232PVMC2PFA	Railroad	\$	1447	\$	1522	1½	42	32	—	—	26 lbs.	3.7
NAC4232PVMC2PF	Standard		1442		1500	1½	42	32	—	—	26 lbs.	3.7
NAC3632PVMC2PFA	Railroad	\$	1307	\$	1372	1½	36	32	—	—	24 lbs.	3.2
NAC3632PVMC2PF	Standard		1302		1360	1½	36	32	—	—	24 lbs.	3.2
NAC3032PVMC2PFA	Railroad	\$	1171	\$	1229	1½	30	32	—	—	22 lbs.	2.8
NAC3032PVMC2PF	Standard		1166		1224	1½	30	32	—	—	22 lbs.	2.8
NAC2732PVMC2PFA	Railroad	\$	1103	\$	1154	1½	27	32	—	—	22 lbs.	2.5
NAC2732PVMC2PF	Standard		1098		1127	1½	27	32	—	—	22 lbs.	2.5
NAC2432PVMC2PFA	Railroad	\$	1035	\$	1086	1½	24	32	—	—	20 lbs.	2.3
NAC2432PVMC2PF	Standard		1030		1059	1½	24	32	—	—	20 lbs.	2.3
NAC2132PVMC2PFA	Railroad	\$	965	\$	1009	1½	21	32	—	—	18 lbs.	2.1
NAC2132PVMC2PF	Standard		960		989	1½	21	32	—	—	18 lbs.	2.1

- Privacy screens are 1 $\frac{1}{16}$ " thick dual sided fabric; the overall assembly thickness
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack fabric grade and color
- Specify metal color for holders: Cinder (462), Platinum Metallic (501), or Satin Nickel Metallic (503)
- For use on 1 $\frac{1}{4}$ " and 1 $\frac{1}{2}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Privacy screens that are 50" or wider cannot use 54" wide COM on standard model. Railroad model must be ordered
- Screen extends 18" above the surface and 12" below the surface

ACCESSORIES


DIMENSION KEY

D	Depth
W	Width
H	Height
A	Overhang: Approach Side
KW	Kneespace Width
DI	Diameter

SAMPLE MODEL NUMBER:

NAC7224PVCTP 1 1677 462


EDGE MOUNTED PRIVACY SCREEN RECTANGULAR, RESIN



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
		D	W	H				
GRADE 1								
NAC7224PVCP	\$ 749	¾"	71⅞"	24"	—	—	24 lbs.	4.7
NAC6624PVCP	713	¾"	65⅜"	24"	—	—	22 lbs.	4.3
NAC6024PVCP	676	¾"	59⅜"	24"	—	—	19 lbs.	4.0
NAC5424PVCP	640	¾"	53⅜"	24"	—	—	17 lbs.	3.6
NAC4824PVCP	604	¾"	47⅞"	24"	—	—	16 lbs.	3.3
NAC4224PVCP	567	¾"	41⅞"	24"	—	—	14 lbs.	2.9
NAC3624PVCP	527	¾"	35⅞"	24"	—	—	12 lbs.	2.5
NAC3024PVCP	490	¾"	29⅝"	24"	—	—	10 lbs.	2.2
NAC2724PVCP	473	¾"	27"	24"	—	—	9 lbs.	2.0
NAC2424PVCP	452	¾"	23⅝"	24"	—	—	8 lbs.	1.8
NAC2124PVCP	435	¾"	21"	24"	—	—	7 lbs.	1.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Cinder (462), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are ¾" thick dual sided resin; the overall assembly thickness, including the holders, is 1⅝"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1⅝" and 1⅞" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface

EDGE MOUNTED PRIVACY SCREEN TAPERED, RESIN





GRADE 1								
NAC7224PVCTP	\$ 749	¾"	71⅜"	24"	—	—	24 lbs.	4.7
NAC6624PVCTP	713	¾"	65⅜"	24"	—	—	22 lbs.	4.3
NAC6024PVCTP	676	¾"	59⅜"	24"	—	—	19 lbs.	4.0
NAC5424PVCTP	640	¾"	53⅜"	24"	—	—	17 lbs.	3.6
NAC4824PVCTP	604	¾"	47⅞"	24"	—	—	16 lbs.	3.3
NAC4224PVCTP	567	¾"	41⅞"	24"	—	—	14 lbs.	2.9
NAC3624PVCTP	527	¾"	35⅞"	24"	—	—	12 lbs.	2.5
NAC3024PVCTP	490	¾"	29⅝"	24"	—	—	10 lbs.	2.2
NAC2724PVCTP	473	¾"	27"	24"	—	—	9 lbs.	2.0
NAC2424PVCTP	452	¾"	23⅝"	24"	—	—	8 lbs.	1.8
NAC2124PVCTP	435	¾"	21"	24"	—	—	7 lbs.	1.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Cinder (462), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are ¾" thick dual sided resin; the overall assembly thickness, including the holders, is 1⅝"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1⅝" and 1⅞" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface


TO ORDER, SPECIFY:

1. Model Number
 2. Fabric or Resin Grade/Color
 3. Paint Color
- See page 425 for fabrics



Shaded rectangle portrays a railroaded privacy/modesty screen.

**EDGE MOUNTED
PRIVACY SCREEN
RECTANGULAR, FABRIC**



MODEL NO./DESCRIPTION		LIST PRICE		DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
		GRADE A	GRADE B/COM	D	W	H				
NAC7224PVC2PFA	Railroad	\$ 1327	\$ 1392	1 $\frac{1}{8}$ "	71 $\frac{1}{8}$ "	24"	—	—	24 lbs.	4.7
NAC6624PVC2PFA	Railroad	\$ 1243	\$ 1301	1 $\frac{1}{8}$ "	65 $\frac{1}{8}$ "	24"	—	—	22 lbs.	4.3
NAC6024PVC2PFA	Railroad	\$ 1155	\$ 1213	1 $\frac{1}{8}$ "	59 $\frac{1}{8}$ "	24"	—	—	19 lbs.	4.0
NAC6024PVC2PF	Standard	1148	1199	1 $\frac{1}{8}$ "	59 $\frac{1}{8}$ "	24"	—	—	19 lbs.	4.0
NAC5424PVC2PFA	Railroad	\$ 1071	\$ 1122	1 $\frac{1}{8}$ "	53 $\frac{1}{8}$ "	24"	—	—	17 lbs.	3.6
NAC5424PVC2PF	Standard	1066	1117	1 $\frac{1}{8}$ "	53 $\frac{1}{8}$ "	24"	—	—	17 lbs.	3.6
NAC4824PVC2PFA	Railroad	\$ 989	\$ 1033	1 $\frac{1}{8}$ "	47 $\frac{1}{8}$ "	24"	—	—	16 lbs.	3.3
NAC4824PVC2PF	Standard	984	1035	1 $\frac{1}{8}$ "	47 $\frac{1}{8}$ "	24"	—	—	16 lbs.	3.3
NAC4224PVC2PFA	Railroad	\$ 905	\$ 949	1 $\frac{1}{8}$ "	41 $\frac{1}{8}$ "	24"	—	—	14 lbs.	2.9
NAC4224PVC2PF	Standard	899	950	1 $\frac{1}{8}$ "	41 $\frac{1}{8}$ "	24"	—	—	14 lbs.	2.9
NAC3624PVC2PFA	Railroad	\$ 819	\$ 855	1 $\frac{1}{8}$ "	35 $\frac{1}{8}$ "	24"	—	—	12 lbs.	2.5
NAC3624PVC2PF	Standard	814	865	1 $\frac{1}{8}$ "	35 $\frac{1}{8}$ "	24"	—	—	12 lbs.	2.5
NAC3024PVC2PFA	Railroad	\$ 734	\$ 763	1 $\frac{1}{8}$ "	29 $\frac{1}{8}$ "	24"	—	—	10 lbs.	2.2
NAC3024PVC2PF	Standard	729	780	1 $\frac{1}{8}$ "	29 $\frac{1}{8}$ "	24"	—	—	10 lbs.	2.2
NAC2724PVC2PFA	Railroad	\$ 692	\$ 721	1 $\frac{1}{8}$ "	27"	24"	—	—	9 lbs.	2.0
NAC2724PVC2PF	Standard	686	715	1 $\frac{1}{8}$ "	27"	24"	—	—	9 lbs.	2.0
NAC2424PVC2PFA	Railroad	\$ 644	\$ 673	1 $\frac{1}{8}$ "	23 $\frac{1}{8}$ "	24"	—	—	8 lbs.	1.8
NAC2424PVC2PF	Standard	639	668	1 $\frac{1}{8}$ "	23 $\frac{1}{8}$ "	24"	—	—	8 lbs.	1.8
NAC2124PVC2PFA	Railroad	\$ 607	\$ 629	1 $\frac{1}{8}$ "	21"	24"	—	—	7 lbs.	1.6
NAC2124PVC2PF	Standard	602	631	1 $\frac{1}{8}$ "	21"	24"	—	—	7 lbs.	1.6

- Privacy screens are 1 $\frac{1}{8}$ " thick dual sided fabric
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack fabric grade and color
- Specify metal color for holders: Cinder (462), Platinum Metallic (501), or Satin Nickel Metallic (503)
- For use on 1 $\frac{1}{8}$ " and 1 $\frac{1}{2}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Privacy screens that are 50" or wider cannot use 54" wide COM on standard model. Railroad model must be ordered
- Screen extends 18" above the surface and 4" below the surface

ACCESSORIES

DIMENSION KEY

D Depth
W Width
H Height
A Overhang: Approach Side
KW Kneespace Width

SAMPLE MODEL NUMBER:

NAC6012MPA 1 1677 462

To You In
10
DAYS
...or Less


Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered within 10 days.

MODEL NO./DESCRIPTION	LIST PRICE			DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	GRADE 1	GRADE 2	GRADE 3	D	W	H				
RECTANGULAR MODESTY PANEL ½ HEIGHT RESIN										
NAC6012MPA	\$ 586	\$ 867	\$ 969	¾"	59⅞"	12"	—	—	5 lbs.	3.9
NAC5412MPA	526	781	874	¾"	53⅞"	12"	—	—	5 lbs.	3.8
NAC4812MPA	468	692	773	¾"	47⅞"	12"	—	—	4 lbs.	3.7
NAC4212MPA	410	608	680	¾"	41¾"	12"	—	—	4 lbs.	3.7
NAC3612MPA	351	523	585	¾"	35¾"	12"	—	—	4 lbs.	3.7
NAC3012MPA	293	433	485	¾"	29¾"	12"	—	—	3 lbs.	3.6
NAC2412MPA	234	348	390	¾"	23⅞"	12"	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677), Grade 2 Ting Ting (2877) or Scribble Cloud (2977) or Grade 3 Wisp Silver (3377)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ¾" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

TAPERED MODESTY PANEL

½ HEIGHT RESIN





	GRADE 1	GRADE 2	GRADE 3							
NAC6012MPTA	\$ 586	\$ 867	\$ 969	¾"	59⅞"	12"	—	—	5 lbs.	3.9
NAC5412MPTA	526	781	874	¾"	53⅞"	12"	—	—	5 lbs.	3.8
NAC4812MPTA	468	692	773	¾"	47⅞"	12"	—	—	4 lbs.	3.7
NAC4212MPTA	410	608	680	¾"	41¾"	12"	—	—	4 lbs.	3.7
NAC3612MPTA	351	523	585	¾"	35¾"	12"	—	—	4 lbs.	3.7
NAC3012MPTA	293	433	485	¾"	29¾"	12"	—	—	3 lbs.	3.6
NAC2412MPTA	234	348	390	¾"	23⅞"	12"	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677), Grade 2 Ting Ting (2877) or Scribble Cloud (2977) or Grade 3 Wisp Silver (3377)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ¾" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

TO ORDER, SPECIFY:

1. Model Number
 2. Resin Grade/Color
 3. Paint Color
- See page 425 for fabrics



Shaded rectangle portrays a railroaded privacy/modesty screen.

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
RECTANGULAR MODESTY PANEL 1/2" HEIGHT METAL	NAC6012MP2M	\$ 586	1/2"	59 1/4"	12 1/2"	—	—	10 lbs.	3.9
	NAC5412MP2M	526	1/2"	53 1/4"	12 1/2"	—	—	10 lbs.	3.8
	NAC4812MP2M	468	1/2"	47 1/4"	12 1/2"	—	—	8 lbs.	3.7
	NAC4212MP2M	410	1/2"	41 3/4"	12 1/2"	—	—	8 lbs.	3.7
	NAC3612MP2M	351	1/2"	35 3/4"	12 1/2"	—	—	8 lbs.	3.7
	NAC3012MP2M	293	1/2"	29 3/4"	12 1/2"	—	—	6 lbs.	3.6
	NAC2412MP2M	234	1/2"	23 3/4"	12 1/2"	—	—	6 lbs.	3.6

- Specify Style E for embossed design
- Specify metal color: 462 Cinder, 501 Platinum Metallic, 503 Satin Nickel Metallic and 405 Designer White
- Metal modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Modesty comes with brackets that attach to the underside of the worksurface
- Metal modesty has raised square embossed design (the raised design appears on the approach side of the modesty)
- Metal modesty is 16-gauge steel
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

GANGING BRACKET



NACGBT2	Table Ganging Bracket Kit	\$ 77	—	—	—	—	—	1 lbs.	0.1
---------	---------------------------	-------	---	---	---	---	---	--------	-----

- Quantity of 6 (set of 3 pairs) hook and loop "dog bone" shaped brackets
- All hardware included
- Available in black only
- Specify model number only

