


PENDANT INSTALLATION INSTRUCTIONS

NOTE: THE JUNCTION BOXES MUST BE SOLIDLY FIXED TO THE CEILING AND ATTACHED TO THE STRUCTURE INSIDE THE CEILING BEFORE PROCEEDING TO THE INSTALLATION.



PART LIST

- | | |
|-------------------------------------|-----------------------------|
| A Fixture 1 | K Feeder tube |
| B Power cord | L Plastic clips (by others) |
| C Lamp (by others) | M Fixture 2 |
| D Optics | N Joiner |
| E Canopy | O Quick-wire connectors |
| F Ceiling power feed (by others) | P Screws |
| G 1/4"-20 threaded stud (by others) | Q Joining clip |
| H Cable mounting nut | O Aligner |
| I Aircraft cable | R Wire nuts |
| J Cable Grip | |


END VIEW




SIDE VIEW

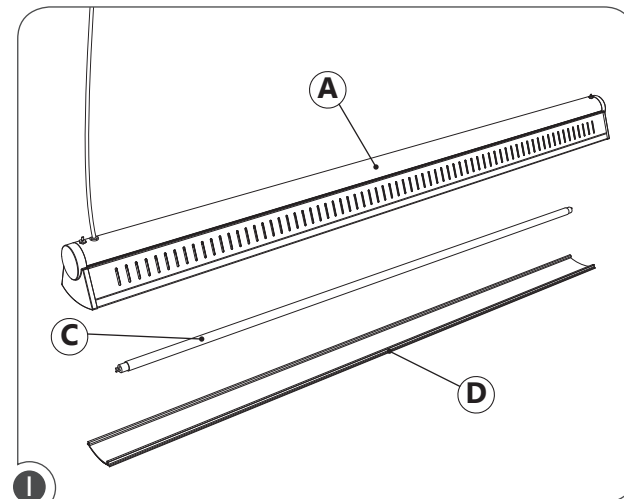


Ensure that the power to the fixture's circuit is turned off. Remove optics (D) and lamp (C) from the fixture (A) if installed.

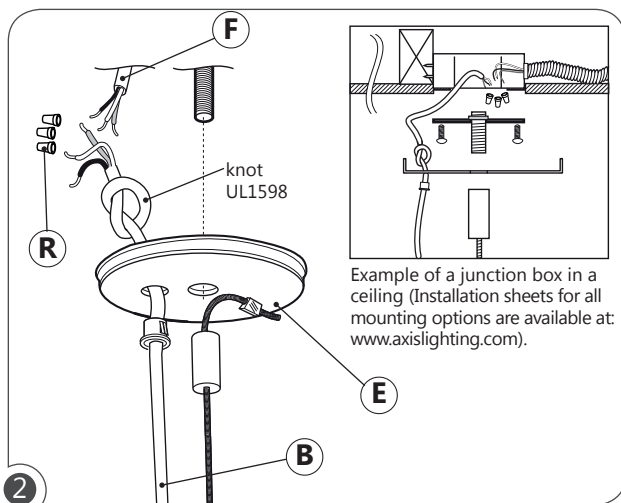

Make a knot on the power cord inside the canopy (E). Connect the power cord (B) to the ceiling power feed (F) using provided wire nuts (R).

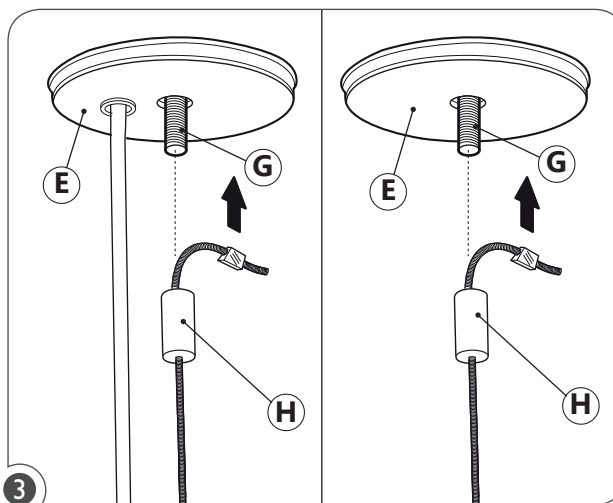

At all suspension points, place canopy (E) in position on threaded stud (G) and secure with cable mounting nut (H).

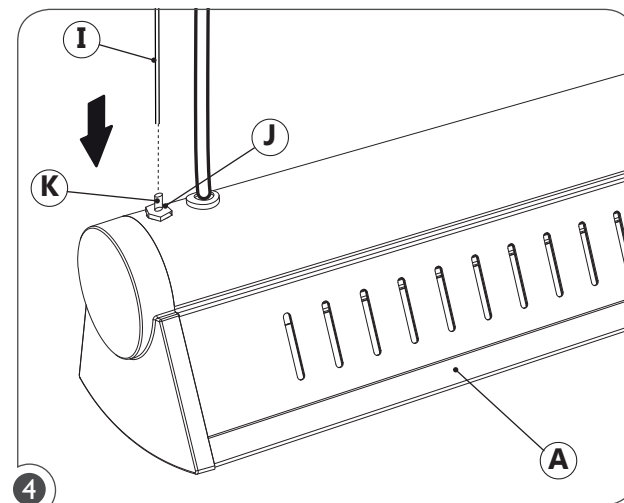


Insert aircraft cable (I) into cable grip (J). Press on the feeder tube (K) of the cable grip to level and adjust the height of the fixture (A), while moving the fixture up and down.

WARNING:




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.




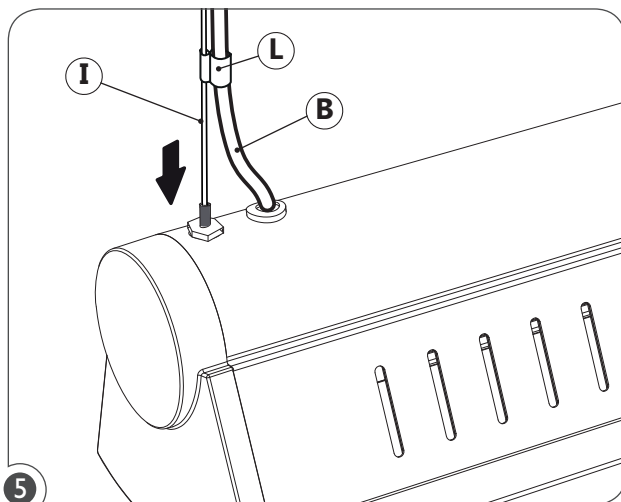


5 Secure power cord (B) to aircraft cable (I) using plastic clips (L).

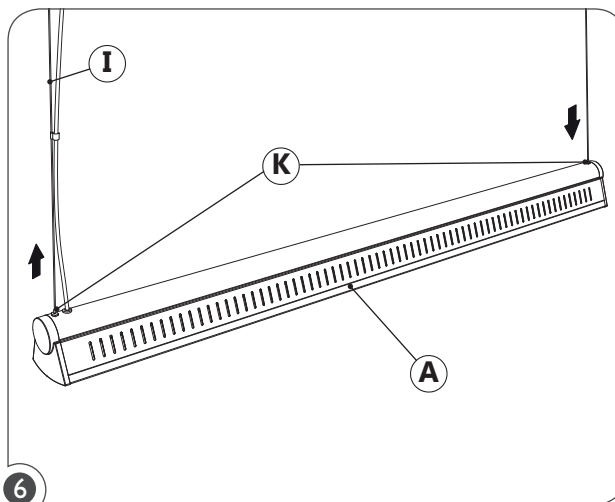


6 To level the fixture, adjust the length of the aircraft cables (I) by pressing down on the cable grip feeder tubes (K). With a level, adjust the fixture (A) so it is straight. BE CAREFUL TO HOLD THE FIXTURE WHILE LEVELING.

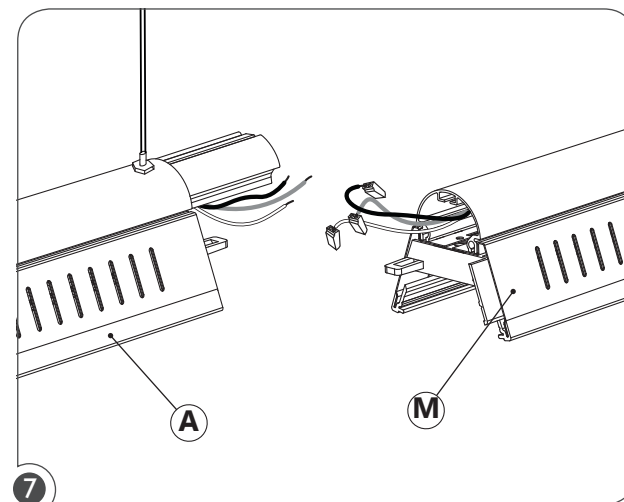


7 **CONTINUOUS ROW:** If row installation is required, remove lens and lamp if installed in all fixtures. With first fixture (A) in place, repeat steps 3 to 5 with the second fixture (M).

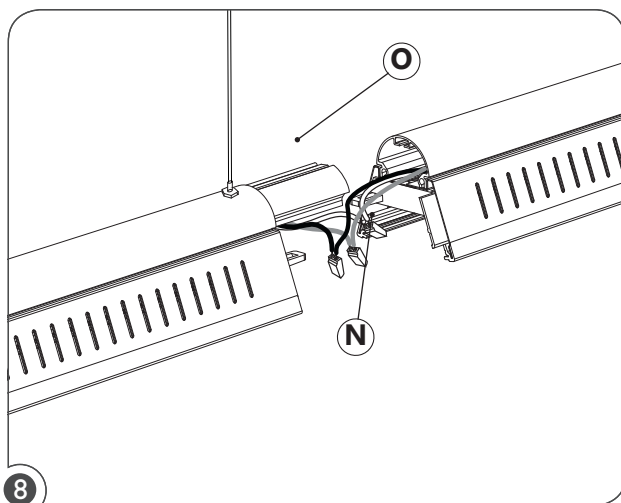

8 Connect the electrical wires between the two fixtures using supplied quick-wire connectors (O). Push the electrical wires and quick-wire connectors (O) into one of the fixture. Slide the two fixtures into each other using the aligner (N).

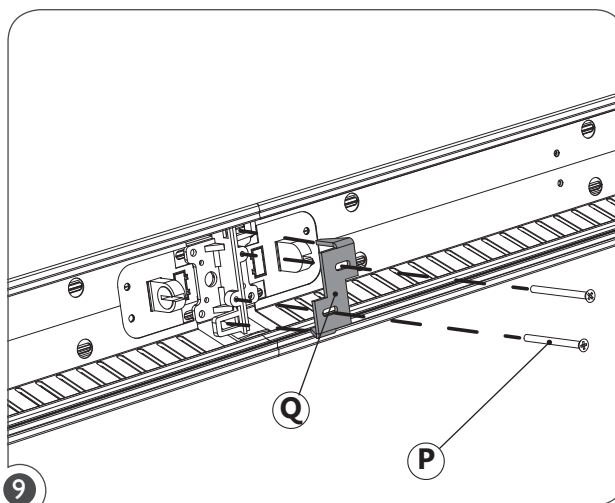

9 Secure the fixtures together using the joining clip (Q) with the supplied screws (P).

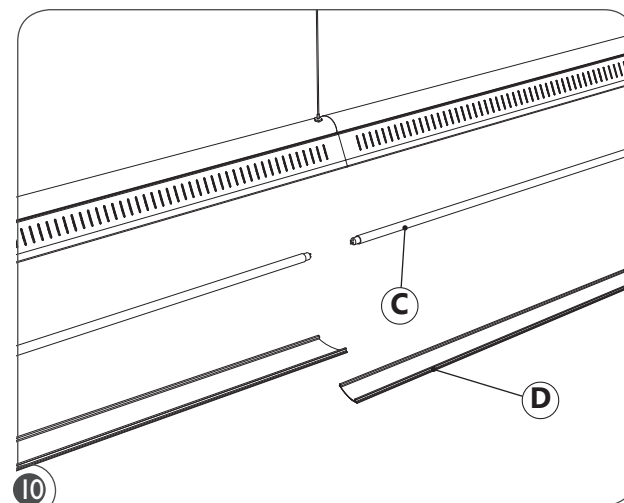

10 Install the lamps (C) and optics (D) in the fixtures.

