


● PROJECT INFORMATION

Project:


Type:

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

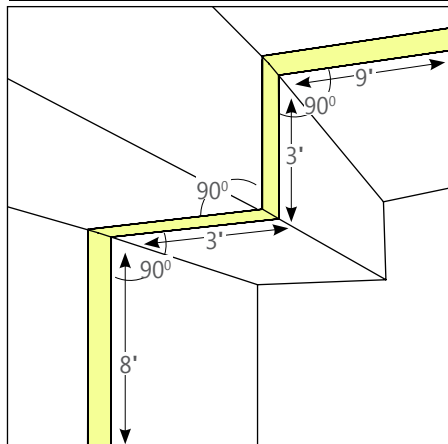


BMRLEDPAT	OPOI	90+90+90+90	21'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Outside/inside 90° Corner Pattern

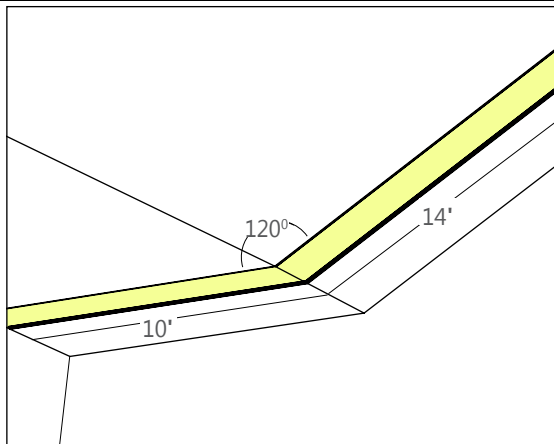

BBRLEDPAT	OPO	120	24'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Outside Corner Pattern

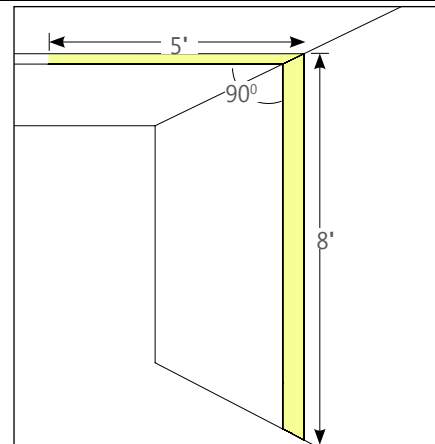

BBRLEDPAT	OPI	90	13'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Inside Corner Pattern

PRODUCT SPECIFICATIONS

PRODUCT ID	PATTERNS	CORNER DEGREES	LUMENS/FT	CRI
BRLEDPAT beam2led recessed	OPO open shape outside lit corner	90 90 degrees	400 400 lm/ft	80 80 CRI
BMRLEDPAT beam3led recessed	OPI open shape inside lit corner	# other degree	500 500 lm/ft	90 90 CRI
BBRLEDPAT beam4led recessed	OPOI open shape outside/inside lit corner		750 750 lm/ft	
B6RLEDPAT beam6led recessed			1000 1000 lm/ft	
(1) Flush only.			Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.	

COLOUR TEMP.	SHIELDING	SHIELDING POSITION	LENGTH/FT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
27 2700 K	SO spotless lens	FL flush	# total pattern length	NL nominal	W white	120 120V	D dimming (0-10V) 1%
35 3500 K		RG regressed		EX exact	C custom	277 277V	DP dimming (0-10V) 5% 347V standard ⁽²⁾
30 3000 K						347 347V ⁽¹⁾	LT Lutron ⁽³⁾
40 4000 K						UNV universal	BI bi-level dimming
							O other ⁽⁴⁾
						(1) D dimming (0-10V) 5% standard	(2) For 347V only (3) Specify system (4x) Please consult factory; see page 2

CIRCUITS	MOUNTING	BATTERY	OTHER	CUSTOM (OPTIONAL)
1 1 circuit	TB9 t-bar 9/16"	B# battery pack 4' sections	F fuse ⁽⁶⁾	C custom
2 2 circuits	TB15 t-bar 15/16"		EF end feed	
+E(#) emergency circuit ⁽⁵⁾	ST screw slot t-bar		FW(#) flex whip (6' std)	
+NL(#) night light circuit ⁽⁵⁾	TG9 tegular 9/16"		CP Chicago plenum	
+GTD(#) generator transfer device ⁽⁵⁾	TG15 tegular 15/16"			
	DF drywall flange			
	D drywall flangeless			
	DB slip-through bracket			
	DS drywall spackle flange			
(5) Specify quantity		Requires 120V or 277V Please consult factory	(6) Requires 120V or 277V	Please specify

● LIT CORNER FEATURES

The Lit Corner system allows continuous illumination all the way through the corner section


To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

There are three types of illuminated corner available:

1. **Regular Illuminated Corner** - This is a fully illuminated 90 degree corner that lies in the same plane, for example, the ceiling or wall. (Please use the "Regular lit corner patterns spec sheet" to specify and Regular lit corner).
2. **Inside Illuminated Corner.** This corner runs up the wall, then across the ceiling.
3. **Outside Illuminated Corner** - This corner would run across a ceiling then up a bulkhead.

TIP: Provide sketches illustrating corner types and locations required.

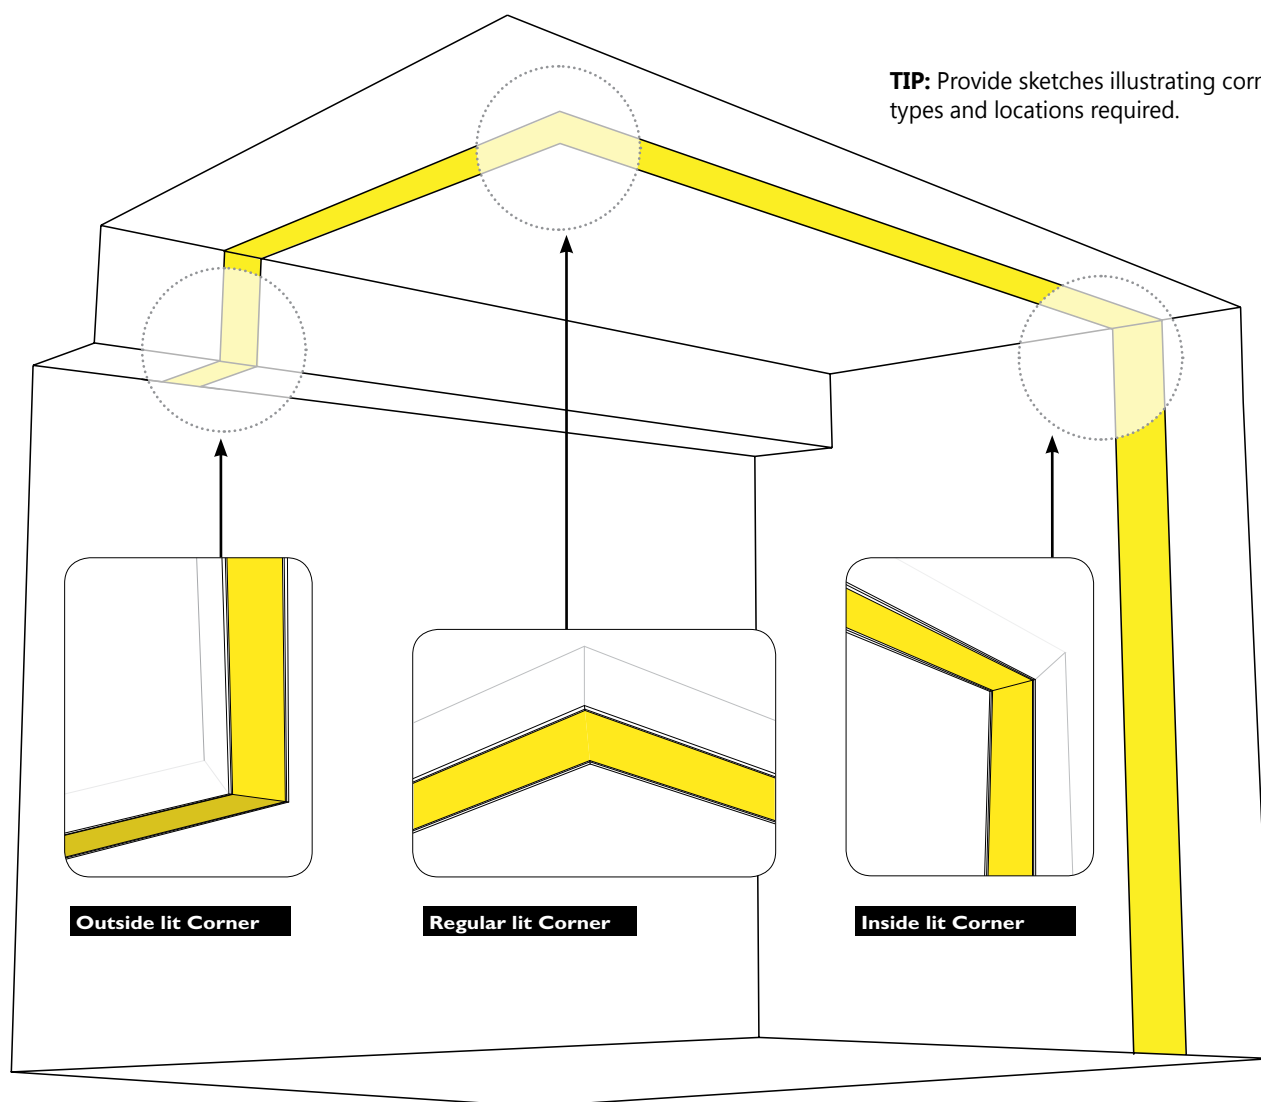



A large grid of squares, intended for drawing corner patterns. The grid is composed of 30 columns and 30 rows of squares, providing a space for technical drawings.