



# Parts Diagram

Piretti Guest Chair—Sled Base

January 2018

KI  
1330 Bellevue Street  
P.O. Box 8100  
Green Bay, WI 54308-8100

TEL 1-800-424-2432  
www.ki.com

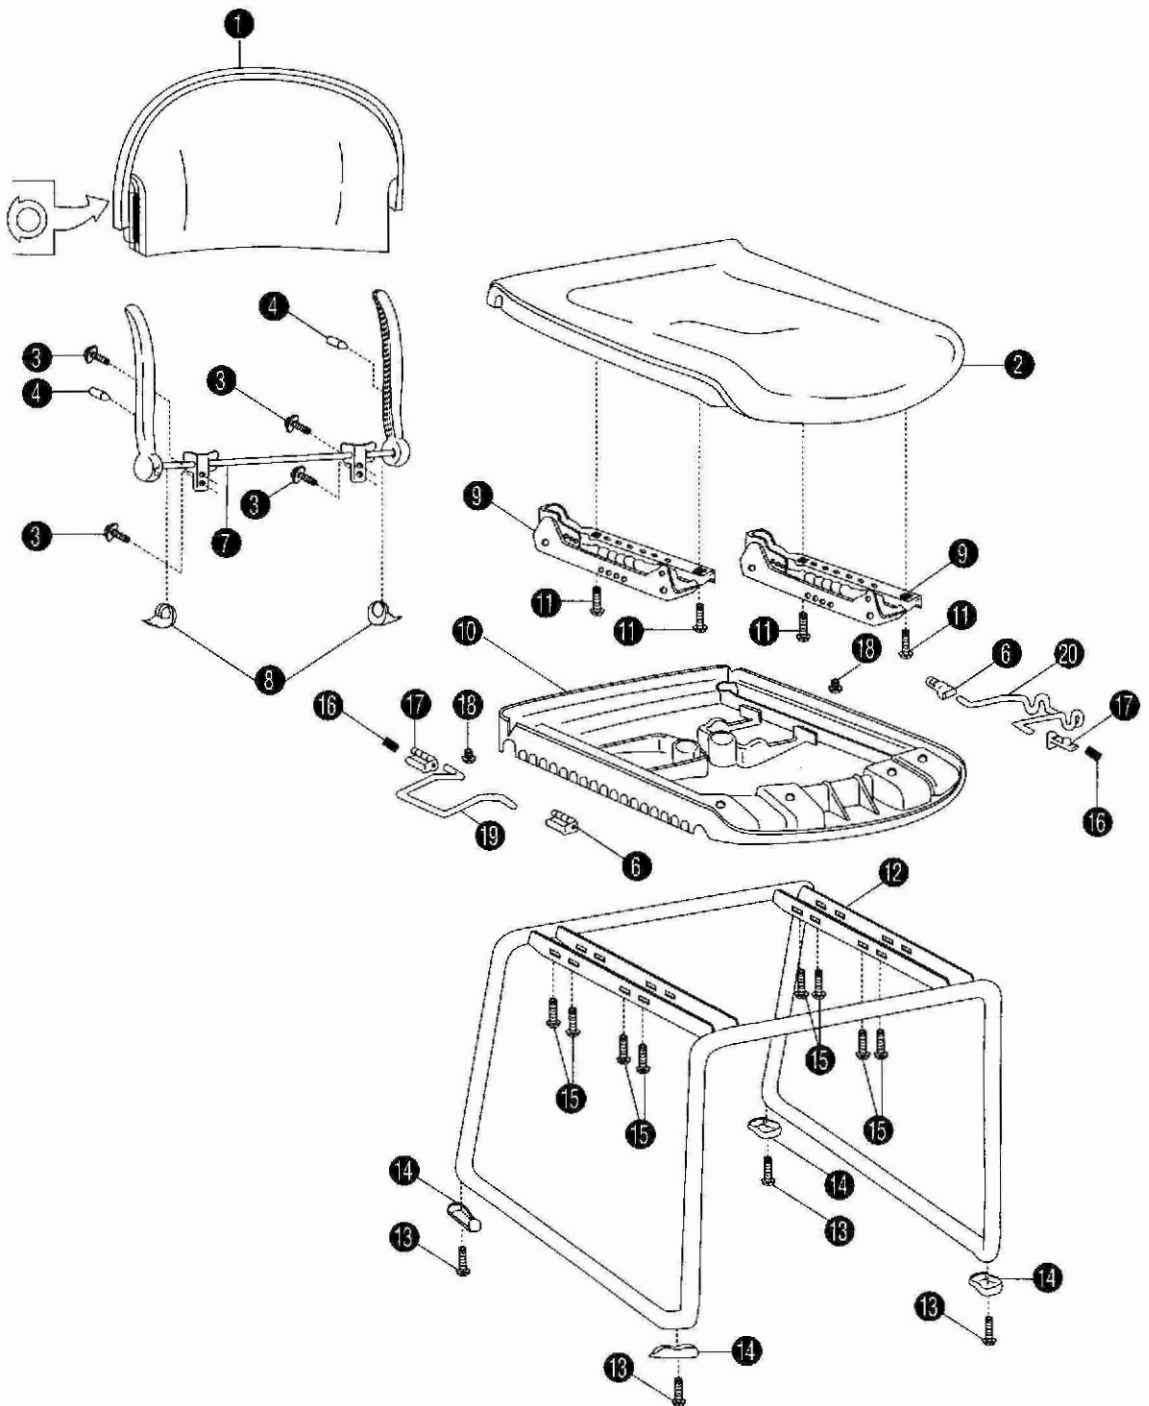

# Piretti Guest Chair - Sled Base

## Parts Diagram

| Item                                      | Code                                 | Description                              | Req Qty |
|-------------------------------------------|--------------------------------------|------------------------------------------|---------|
| 1                                         | 85-8241-XX                           | Piretti back shell with welt             | 1 ea.   |
| 2                                         | 85-8240-XX                           | Piretti seat shell with flanges          | 1 ea.   |
| 3                                         | PC-12-5530                           | Socket head cap 8mm x 14mm               | 4 ea.   |
| 4                                         | PC-12-5000                           | Socket set screw 5mm x 14mm              | 2 ea.   |
| 5                                         | N/A                                  |                                          |         |
| 6                                         | PC-06-2564-BL                        | Ganging bearing                          | 2 ea.   |
| 7                                         | 85-8200-XX                           | Piretti Stacker upright, no-arm          | 1 ea.   |
| 8                                         | 53-8238-BL                           | Finger pinch guard                       | 2 ea.   |
| 9                                         | PC-15-5001A                          | Weighing mechanism                       | 2 ea.   |
| 10                                        | 85-5046-XX                           | Piretti stacker crankcase                | 1 ea.   |
| 11                                        | D-12-0430-BL                         | Type F 12-24 x 7/8" Phillips oval head   | 4 ea.   |
| 12                                        | 85-8211-XX                           | Piretti sled frame, no-arm               | 1 ea.   |
| 13                                        | 12-5140                              | Screw, #8 x 3/8" PPH Type B              | 4 ea.   |
| 14                                        | 53-8237                              | 5500 glide polyethylene                  | 4 ea.   |
|                                           | 53-8236                              | 5500 glide clear                         | 4 ea.   |
|                                           | 06-0448                              | Stainless steel glide PRY ARM CH         | 4 ea.   |
| 15                                        | PC-12-5141                           | 8-32 x 5/16" PPH                         | 8 ea.   |
| 16                                        | PC-45-5510                           | Ganger spring                            | 2 ea.   |
| 17                                        | PC-06-2562-BL                        | Ganger bearing spring side               | 2 ea.   |
| 18                                        | PC-12-0583                           | Screw, #8 x 1/2" PFH Type B              | 8 ea.   |
| 19                                        | 87-7831                              | Piretti stacker right hand ganger chrome | 1 ea.   |
| 20                                        | 87-7830                              | Piretti stacker left hand ganger chrome  | 1 ea.   |
| XX = Specify color BL, GR, BS, RS, SA, WG |                                      |                                          |         |
| * 2 additional glides available           |                                      |                                          |         |
|                                           | Stainless steel (option SSG) 06-0448 |                                          | 4 ea.   |
|                                           | Clear lexan (option gld) 53-8236     |                                          | 4 ea.   |