ROOFING SELECTION GUIDE

Luxury, Designer & Traditional Roofing Shingles







You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?





ARCADIA SHAKE®

- Four-layer laminate construction mimics the look of cedar shakes
- Four cutouts on the top of each shingle add dimensionality
- Variegated edges enhance the authentic wood shake appearance
- 450 lbs. per square
- Lifetime limited transferable warranty – residential*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- ASTM E108 Class A
- ASTM D3018 Type 1

Wind Resistance:

- ASTM D3161 Class F
- ASTM D7158 Class H

Tear Resistance:

- ASTM D3462
- CSA standard A123.5

Impact Resistance:

• UL2218 Class 3


COLOR AVAILABILITY









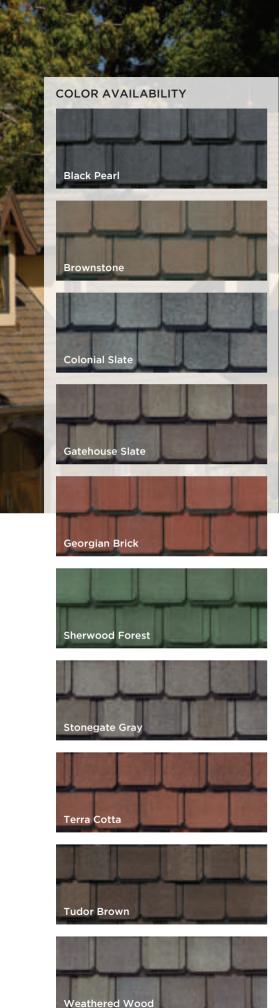



GRAND MANOR®

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter[®] algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



BELMONT®

- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- All colors are available in an Impact Resistant version



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

• All colors available in a version that meets UL2218 Class 4












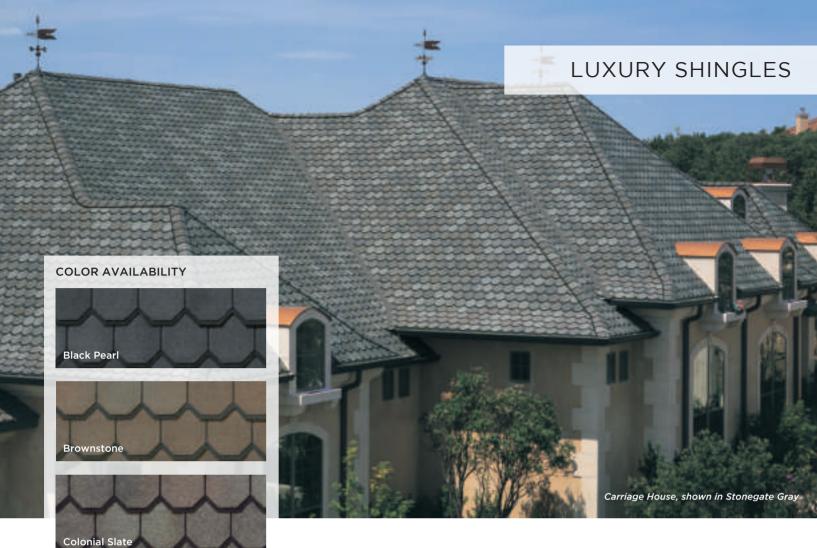











CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:


 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

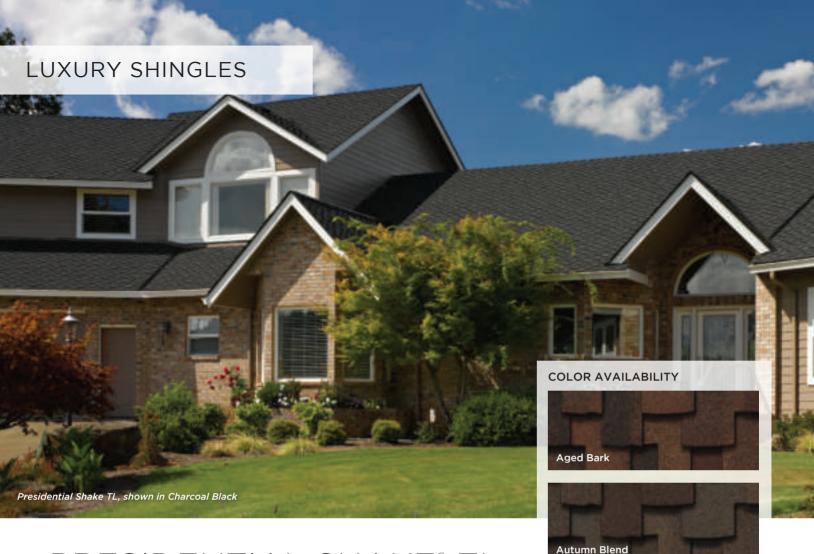

PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:























PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.
- ** Color available in impact resistant version.
- *** ENERGY STAR qualified product called Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

 Select colors (**) available in version that meets UL2218 Class 4

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537


Also available in Landmark® Premium:

A heavier weight product (300 lb. per square) available in four maximum definition colors (Max Def Burnt Sienna, Max Def Heather Blend, Max Def Moire Black and Max Def Weathered Wood) with the same warranties and performance ratings as Landmark Pro.


































LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 229/236 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
 CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F


Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

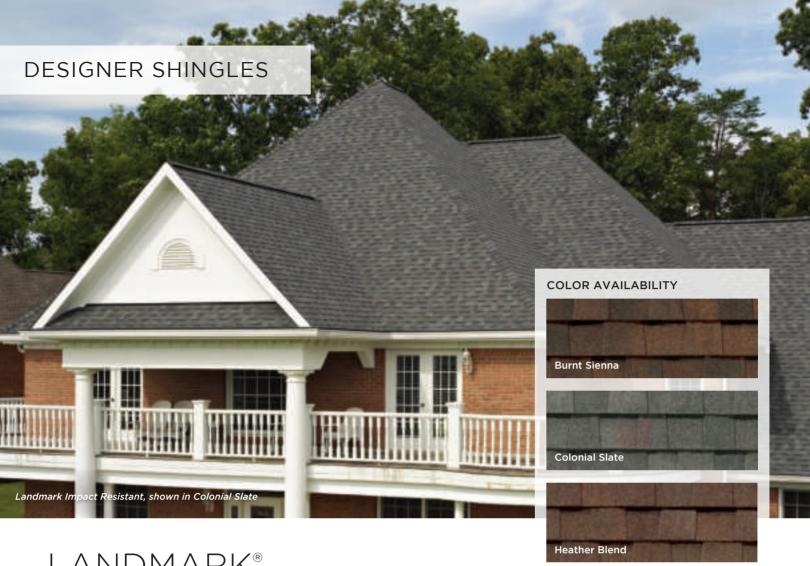

LANDMARK®

Impact Resistant

- Fiberglass-based construction
- 250 lbs. per square
- Lifetime limited transferable warranty*
- 10-year SureStart[™] protection
- 10-year StreakFighter® algae-resistance warranty
- 15-year 110 mph wind-resistance
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- * See warranty for specific details and limitations.



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

• UL Class A

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet **ASTM D3462**
- CSA standard A123.5

Impact Resistance:

• UL2218 Class 4

Wind Driven Rain Resistance:


• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

















LANDMARK SOLARIS PLATINUM







LANDMARK SOLARIS®

Solar Reflective Shingles


- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

| | Color | CRRC Rated Product Directory | | | | | | | |
|--|------------------------|------------------------------|------|----------------------|------|---------------------------|------|----------------------|-----------------------------|
| Product | | Solar Reflectance | | Thermal Emittance | | Solar Reflective Index | | CA 2016 Title 24* | Energy Star Certified |
| | | Initial | Aged | Initial | Aged | Initial | Aged | ું ફ | ច្ចអ្ន |
| Landmark Solaris" Gold | Max Def Resawn Shake | 0.26 | 0.25 | 0.88 | 0.90 | 26 | 25 | YES | YES |
| Landmark Solaris" Gold | Max Def Weathered Wood | 0.25 | 0.24 | 0.90 | 0.89 | 25 | 24 | YES | YES |
| Landmark Solaris [®] Platinum | Coastal Tan | 0.40 | 0.36 | 0.91 | 0.90 | 45 | 40 | YES | YES |
| Landmark Solaris" Platinum | Santa Fe | 0.40 | 0.35 | 0.90 | 0.91 | 45 | 39 | YES | YES |
| Landmark Solaris" Platinum | Sierra Buff | 0.41 | 0.37 | 0.92 | 0.90 | 47 | 41 | YES | YES |


^{*} Can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.

^{*} See warranty for specific details and limitations.

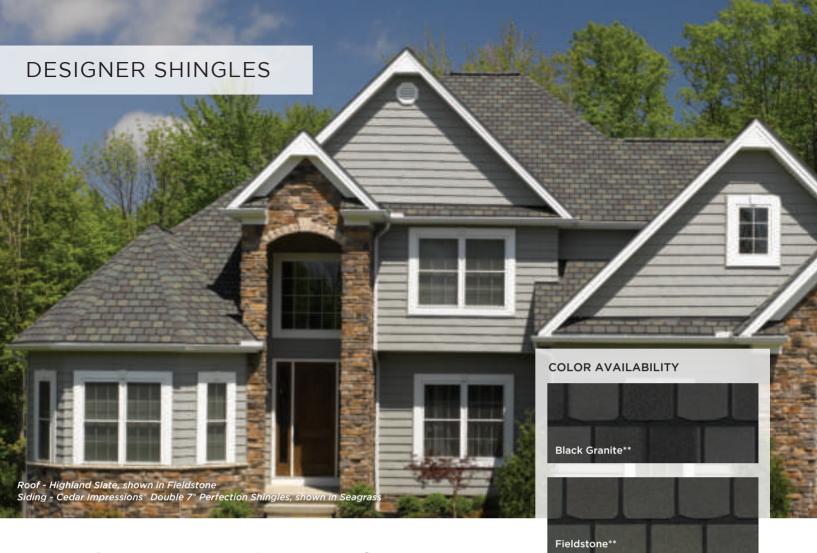

HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select colors**)



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5


Impact Resistance:

ullet Select colors (**) available in version that meets UL2218 Class 4


Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:


























PATRIOT

- Architectural style shingles
- Single layer fiberglass-based construction
- Intricate color blend drops combined with intermittent shadow lines
- 215 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 8-year SureStart[™] protection
- 10-year 110 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:


- UL certified to meet ASTM D3161 Class F
- UL certified to meet ASTM D7158 Class H

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

TRADITIONAL SHINGLES

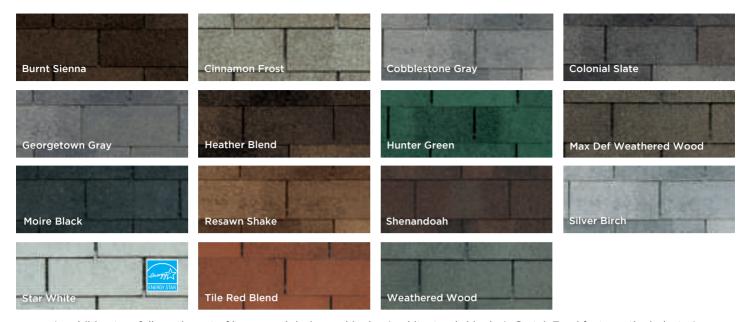

In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CT[™] 20

- Fiberglass composition
- Designed for long-lasting performance and durability
- 195 lbs. per square
- 20-year limited transferable warranty*
- 3-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018
 Type 1
- ASTM D3161 Class F

Tear Resistance:

UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Burnt Sienna Georgetown Gray Heather Blend Moire Black Resawn Shake Weathered Wood

CERTAINTEED XT™25

- Fiberglass composition
- Designed for long-lasting performance and durability
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warrantv
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

• UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Burnt Sienna Cinnamon Frost Cobblestone Gray Colonial Slate Georgetown Gray Heather Blend Hunter Green Moire Black Resawn Shake Silver Birch Star White Tile Red Blend Weathered Wood

CERTAINTEED XT™30

Impact Resistant

- Fiberglass composition
- Designed for long-lasting performance and durability
- 230 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart[™] protection
- 5-year 70 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

• UL2218 Class 4

Wind Driven Rain Resistance:


 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537


Burnt Sienna Moire Black
Colonial Slate Resawn Shake
Heather Blend Shenandoah
Max Def Weathered Wood Weathered Wood

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- · Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- · Algae resistant



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingleover vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Arcadia, Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



Mountain Ridge®

- Fiberglass reinforced SBS modified bitumen
- Five layer design with tri-laminate base
- Available in 8" and 10" widths
- 8" exposure





Integrity Roof System™

Integrity is built from the bottom up. Layer-on-layer, only CertainTeed provides the peace of mind that comes with the best components performing together for peak efficiency.



- Waterproof Underlayment
 Waterproofing shingle underlayment prevents
- 2. Water-Resistant Underlayment

leaks from wind-driven rain and ice dams

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

3. Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

- Hip & Ridge Caps
 Perfect finish for hip and ridge line
 - Perfect finish for hip and ridge lines, complementing all CertainTeed shingles
- Roof Ventilation
 Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents

StreakFighter® algae-resistance protection

StreakFighter is a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. It helps safeguard a roof's beauty, especially in humid areas.

SureStart™ protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor



to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

Roofers' Select®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- · Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind



 Meets underlayment requirements for the CertainTeed Integrity Roof System™

DiamondDeck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.



WinterGuard®





When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.

RoofRunner™

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.

MetaLayment® Self-Adhering Metal Underlayment

MetaLayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

SELECTION GUIDE

| LUXURY SHII | NGLES | Shingle Construction and Description | Weight (lbs. per square) | UL Class A Fire Resistance Rating | UL Certified to Meet ASTM D3462 | UL Certified to Meet ASTM D3018 Type 1 | UL 2218 Impact Resistance Rating | ASTM D3161 Wind Resistance | | |
|---|-------------------------|--|-----------------------------|--------------------------------------|------------------------------------|--|-------------------------------------|-------------------------------|--|--|
| Arcadia | | Four-layer laminate construction mimics the look of cedar shakes; Four cutouts on the top of each shingle add dimensionality; Variegated edges enhance the authentic wood shake appearance | 450 | ~ | ~ | V | Class 3 | Class F, 110 mph | | |
| Grand Manor | -111- | Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied | 425 | V | ~ | V | | Class F, 110 mph | | |
| Belmont Impact Resistant Version Available | | Single layer, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate | 275 | ~ | ~ | V | Class 4 | Class F, 110 mph | | |
| Carriage House | ست | Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied | 350 | > | ~ | ~ | | Class F, 110 mph | | |
| Presidential Shake TL | Series ! | Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look | 475 | ~ | ~ | ~ | | Class F, 110 mph | | |
| Presidential Shake Impact Resistant Version Available (Select colors) | Terrer) | Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look | 355 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | | |
| Presidential Solaris Gold | mm | Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look | 355 | ~ | ~ | ~ | | Class F, 110 mph | | |
| DESIGNER SI | HINGLES | | | | | | | | | |
| Landmark Pro | 0000 | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 250 | < | ~ | ~ | | Class F, 110 mph | | |
| Landmark Premium | 0000 | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 300 | ~ | ~ | ~ | | Class F, 110 mph | | |
| Landmark Impact Resistant Version Available | 0000 | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 229/236 250 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | | |
| Landmark Solaris | 0000 | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate | 250 | ~ | ~ | ~ | | Class F, 110 mph | | |
| Highland Slate Impact Resistant Version Available (Select colors) | | Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate | 240 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | | |
| Patriot | | Architectural style shingle; Single layer fiberglass- based construction; Intricate color blend drops combined with intermittent shadow lines | 215 | ~ | ~ | ~ | | Class F, 110 mph | | |
| TRADITIONAL SHINGLES | | | | | | | | | | |
| XT 30 Impact Resistant | | Fiberglass composition; Designed for long-lasting performance and durability | 205 | ~ | ~ | ~ | Class 4 | ~ | | |
| XT 25 | Designation of the last | Fiberglass composition; Designed for long-lasting performance and durability | 205 | ~ | ~ | ~ | | ~ | | |
| CT 20 | | Fiberglass composition; Designed for long-lasting performance and durability | 195 | ~ | ~ | ~ | | ~ | | |

^{**} Wind warranty upgrade to 130 mph available.

| Miami-Dade Product Control Acceptance | Conforms To CSA Standard A123.5 | Limited Transferable Warranty Against Manufacturing Defects On Residential Applications '50-Year on Group-owned or Commercial Applications | StreakFighter algae-resistance Warranty (where available) | SureStart Protection | Wind-Resistance Warranty Uograded wind warranty available. See warranty for details and limitations | Shingle Size | Bundles Per Square |
|--|------------------------------------|--|---|----------------------|---|--------------------------------------|-----------------------|
| | ٧ | Lifetime | 15-year | 10-year | 15-year 110 mph ** | 37 1/2" x 19 1/2" 8" Exposure | 6 |
| > | \ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| | V | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 4 |
| > | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 6 |
| ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| > | V | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| | | | 1 | | | | |
| ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| > | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 4 |
| / | ~ | Lifetime | 10-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| > | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| / | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 3 |
| | ~ | 30-year | 10-year | 8-year | 10-year 110 mph | 13 1/4" x 39 3/8" 5 5/8" Exposure | 3 |
| | | | ı | | | | |
| ~ | ~ | 30-year | 10-year | 5-year | 5-year 70 mph | 12" x 36" 5" Exposure | 3 |
| ~ | | 25-year | 10-year | 5-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |
| / | | 20-year | | 3-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |

CertainTeed starter and CertainTeed hip and ridge required.

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Belmont and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Arcadia, Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- · Assures Class A fire rating
- · Saves significant installation time

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Shangle® Ridge Accessory

 Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

 Hip and ridge for Presidential TL, Presidential Shake and Landmark Series; 30 lineal ft. per bundle; 24 shingles per bundle

Mountain Ridge®

 Hip and ridge for Presidential TL, Presidential Shake, Presidential Solaris, Landmark Series and Landmark Solaris

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal ft. per bundle; 24 shingles per bundle

Cedar Crest®

- Hip and ridge for Arcadia, Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle
- IR version available in select colors

Ventilation

- CertainTeed Ridge Vent 12" filtered and non-filtered
- CertainTeed Ridge Vent 9" filtered
- CertainTeed Rolled Ridge Vent unfiltered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent

^{***} With approved underlayment






What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

MATTERHORN®

Metal Roofing

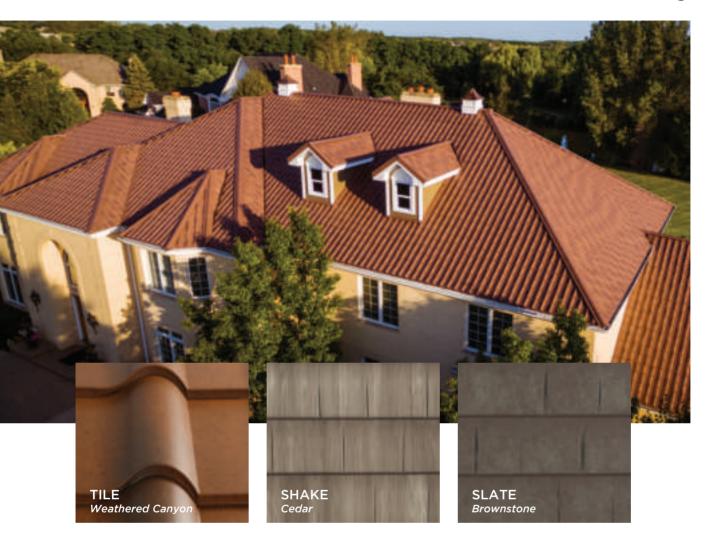

Because it's more than just a roof

Matterhorn Metal Roofing takes the form of slate, tile or wood shake to create a beautiful roof that makes a lasting impression.

Replicate the charm of artisanal roofing at a fraction of the cost with durable, lightweight steel.

Includes a lifetime limited warranty. Laboratory tested to resist fire, wind and hail.

Features a proprietary multi-coat paint system that offers 17 hyper-realistic color options across all profiles, including 14 CRRC-rated cool roofing colors.



RESIDENTIAL ROOFING



NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.

learn more at: certainteed.com/roofing



CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com