


ROOFING SELECTION GUIDE

Luxury, Designer
& Traditional
Roofing Shingles

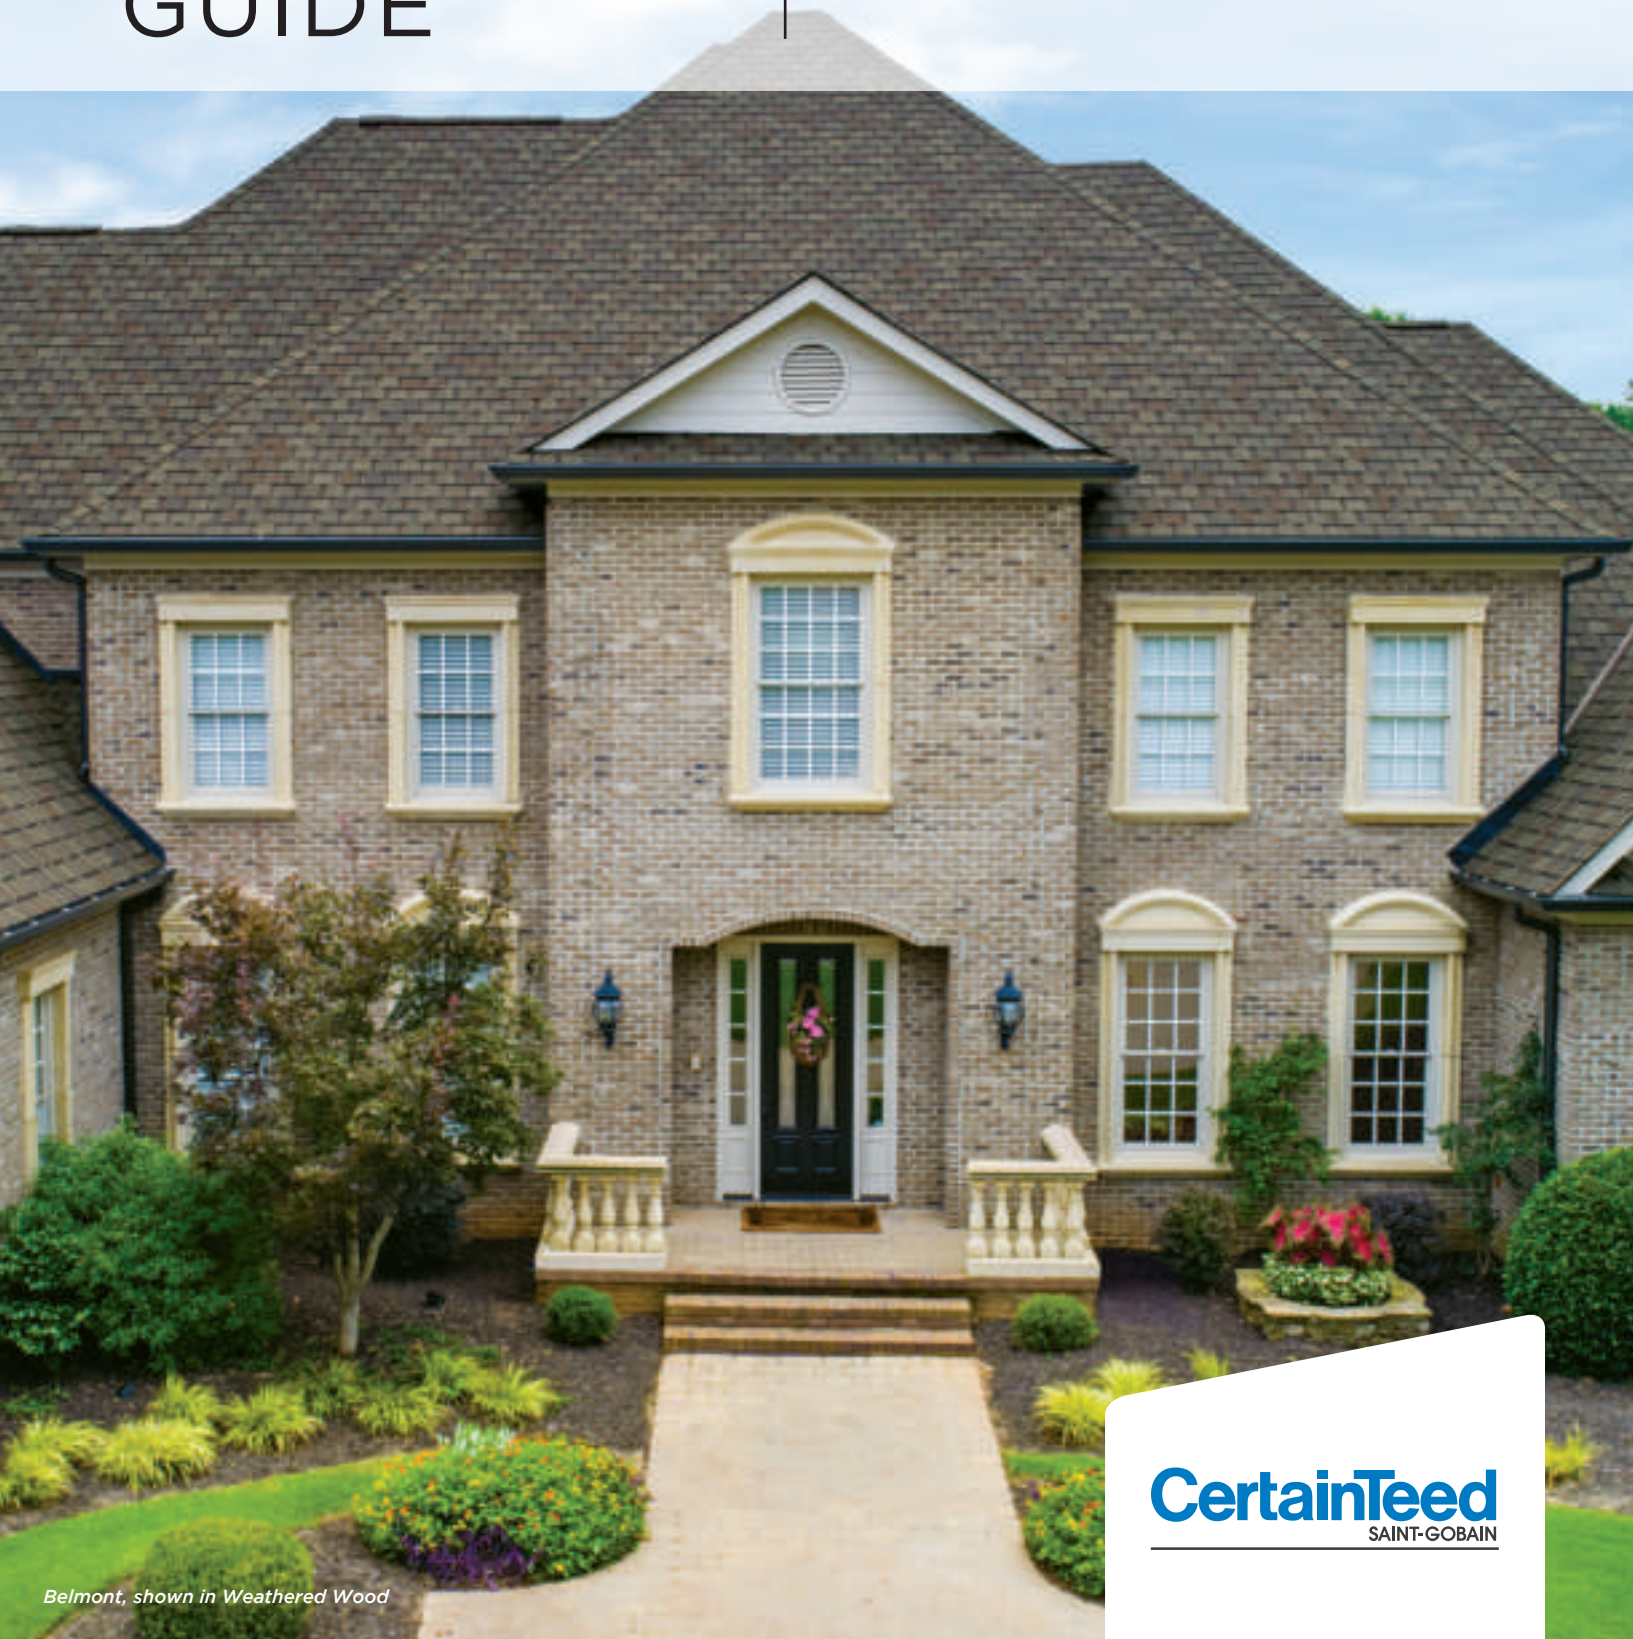

Belmont, shown in Weathered Wood

CertainTeed
SAINT-GOBAIN





You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess,
when you can be Certain?

CertainTeed
SAINT-GOBAIN

LUXURY SHINGLES



Arcadia Shake, shown in Solaris Weathered Wood

ARCADIA SHAKE®

- Four-layer laminate construction mimics the look of cedar shakes
- Four cutouts on the top of each shingle add dimensionality
- Variegated edges enhance the authentic wood shake appearance
- 450 lbs. per square
- Lifetime limited transferable warranty – residential*
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- ASTM E108 Class A
- ASTM D3018 Type 1

Wind Resistance:

- ASTM D3161 Class F
- ASTM D7158 Class H

Tear Resistance:

- ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 3







Solaris Weathered Wood:

- Calculated SR: 0.22

Solaris Cypresswood:







- Calculated SR: 0.21

COLOR AVAILABILITY

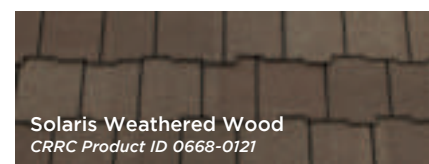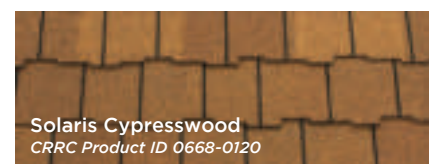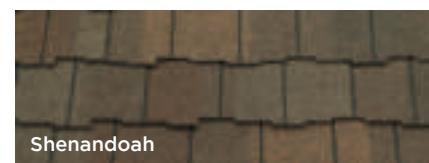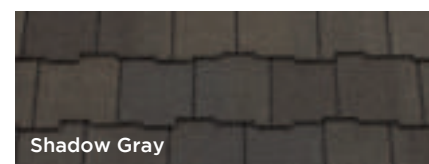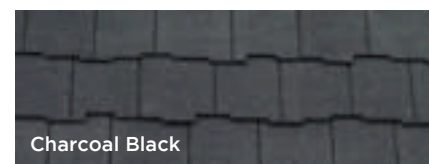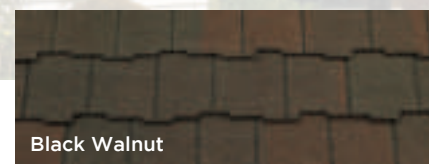

LUXURY SHINGLES

COLOR AVAILABILITY

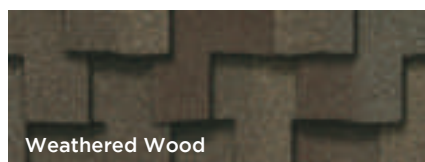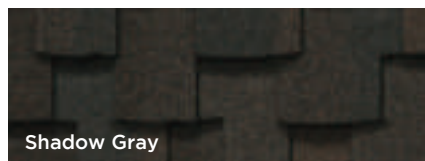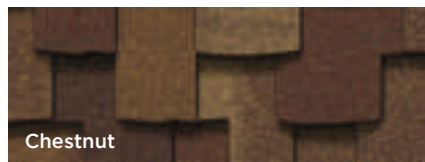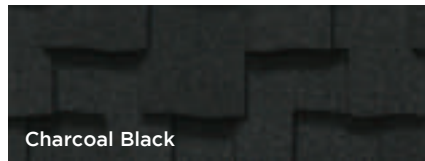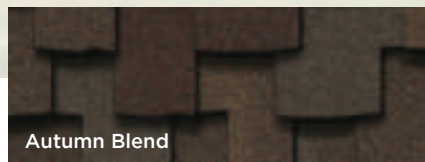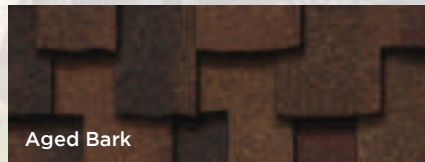

PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5


Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

LUXURY SHINGLES

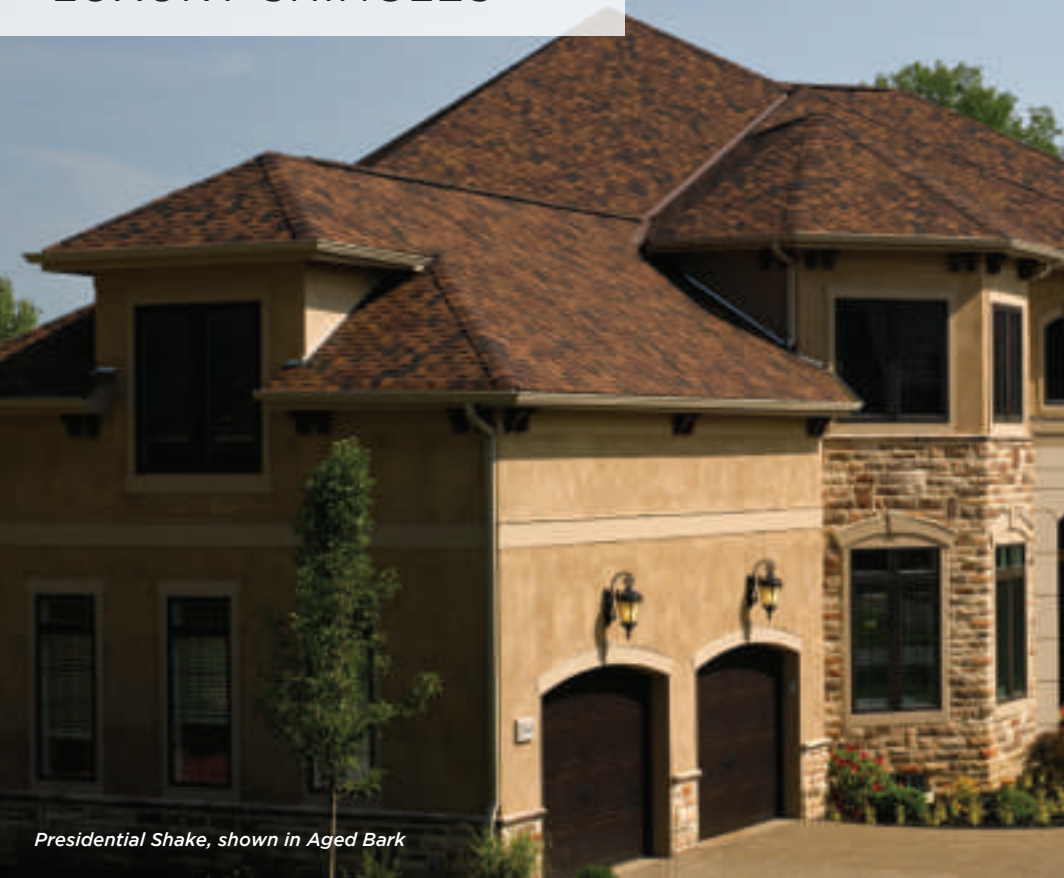

Presidential Shake, shown in Aged Bark

PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

** Color available in impact resistant version.

*** ENERGY STAR qualified product called Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- Select colors (**) available in version that meets UL2218 Class 4


Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537


COLOR AVAILABILITY

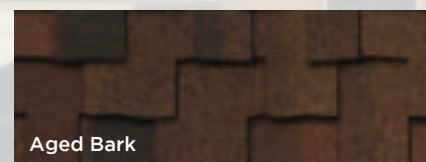


Aged Bark

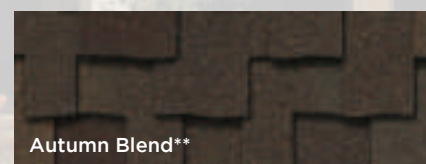

Autumn Blend**

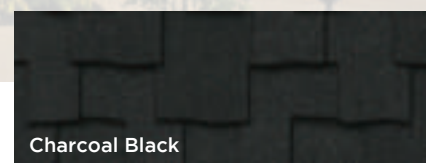


Charcoal Black

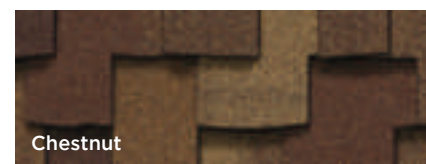


Chestnut




Classic Weathered Wood**

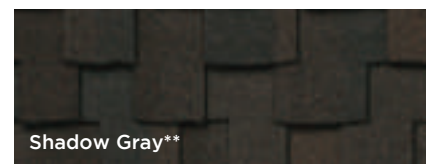

Shadow Gray**










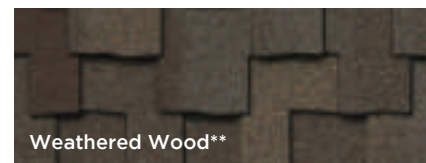


Weathered Wood**

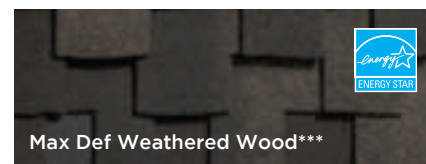

Max Def Weathered Wood***

COLOR AVAILABILITY

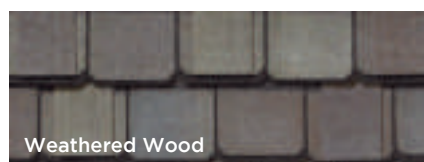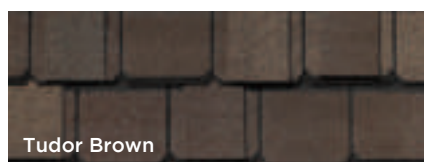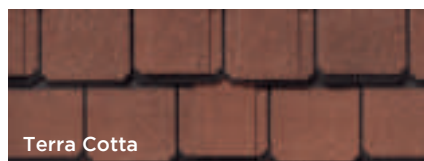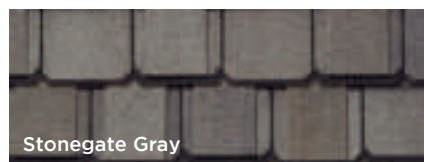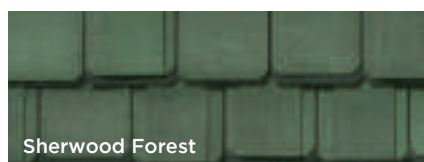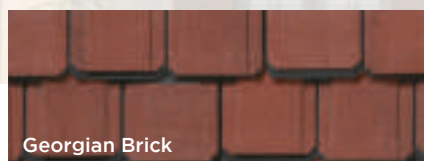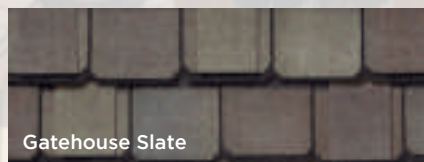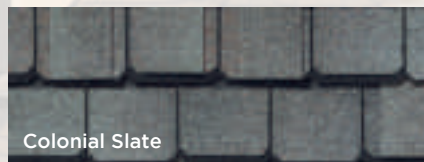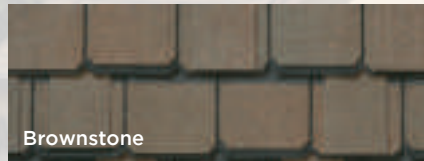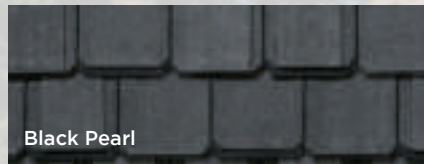

GRAND MANOR[®]

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter[®] algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

LUXURY SHINGLES

Belmont, shown in Black Granite

BELMONT®

- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- All colors are Impact Resistant

** See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:


- UL2218 Class 4




COLOR AVAILABILITY

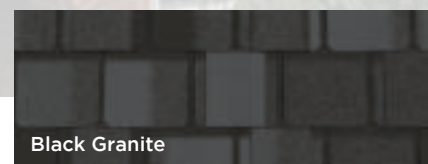


Black Granite

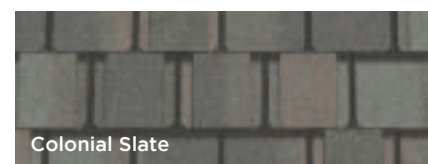


Colonial Slate

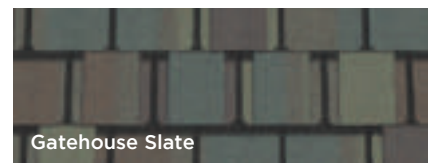


Gatehouse Slate

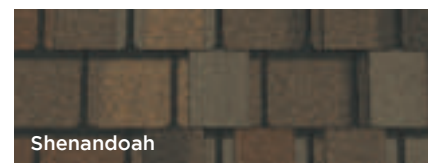

Shenandoah

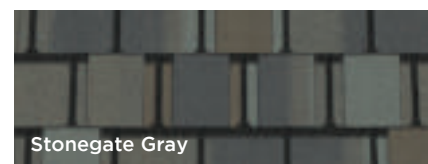

Stonegate Gray

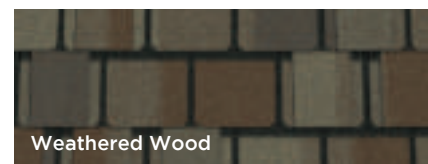

Weathered Wood

LUXURY SHINGLES

COLOR AVAILABILITY

Black Pearl

Brownstone

Colonial Slate

Gatehouse Slate

Georgian Brick

Sherwood Forest

Stonegate Gray

Victorian Blue

Carriage House, shown in Stonegate Gray

CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR AND CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

LUXURY SHINGLES

Landmark TL, shown in Shenandoah

LANDMARK® TL

- Three-piece laminated fiberglass construction
- Rustic appearance of hand-split wood shakes
- 305 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

** See warranty for specific details and limitations.*

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5


Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537


COLOR AVAILABILITY

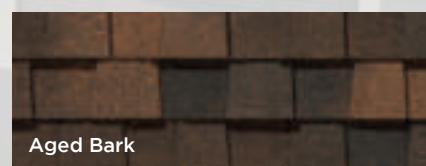


Aged Bark

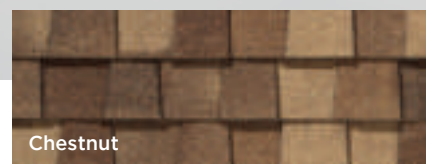


Chestnut

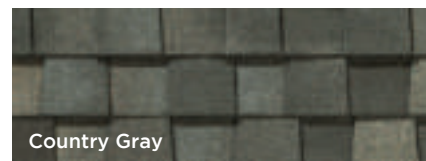


Country Gray

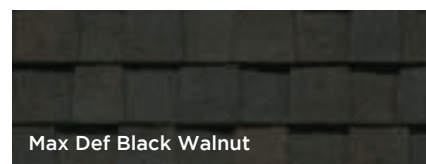


Max Def Black Walnut

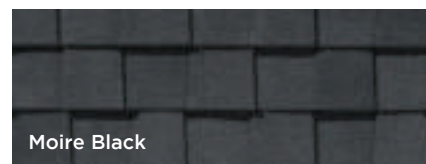

Moire Black

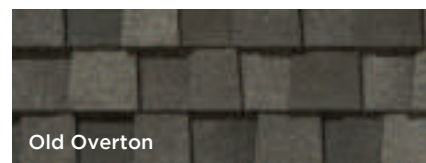


Old Overton

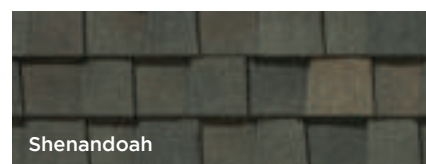


Shenandoah

DESIGNER SHINGLES


COLOR AVAILABILITY

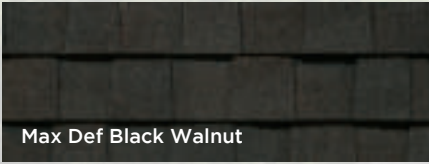


Max Def Black Walnut

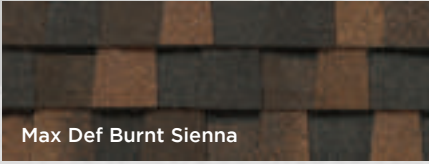


Max Def Burnt Sienna

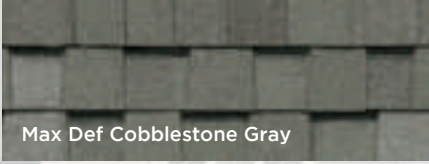


Max Def Cobblestone Gray

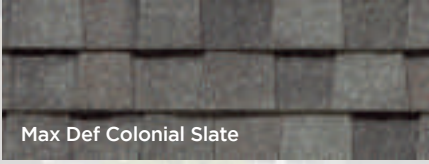


Max Def Colonial Slate

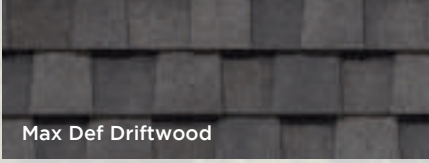


Max Def Driftwood

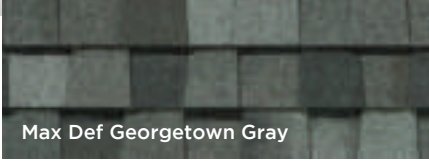


Max Def Georgetown Gray

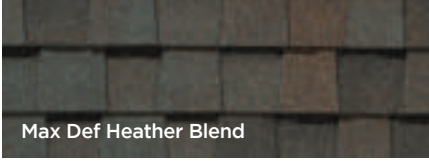


Max Def Heather Blend

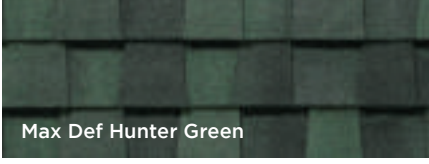


Max Def Hunter Green

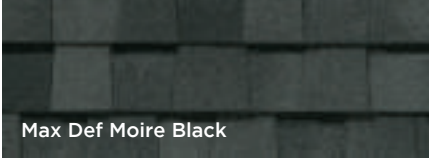

Max Def Moire Black

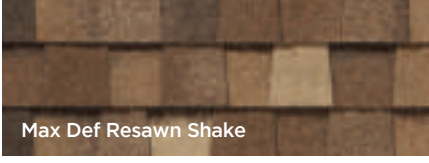

Max Def Resawn Shake



Max Def Weathered Wood



Landmark Pro, shown in Max Def Moire Black

LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Also available in Landmark® Premium:


A heavier weight product (300 lb. per square) available in four maximum definition colors (Max Def Burnt Sienna, Max Def Heather Blend, Max Def Moire Black and Max Def Weathered Wood) with the same warranties and performance ratings as Landmark Pro.

DESIGNER SHINGLES




Landmark, shown in Georgetown Gray


COLOR AVAILABILITY




Birchwood




Hunter Green




Black Walnut




Moire Black




Burnt Sienna




Mojave Tan



Cobblestone Gray




Resawn Shake




Cottage Red




Silver Birch




Driftwood




Sunrise Cedar




Georgetown Gray



Thunderstorm Gray



Heather Blend



Weathered Wood

LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 230-235 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven

Rain Resistance:


- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:


- ICC-ES-ESR-1389 & ESR-3537

DESIGNER SHINGLES


COLOR AVAILABILITY

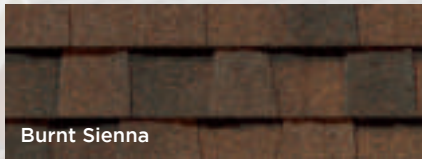


Burnt Sienna

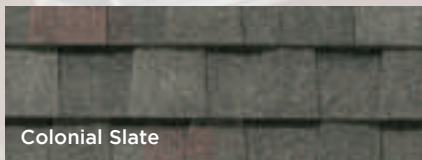


Colonial Slate

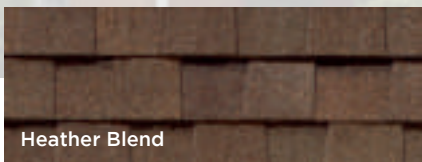


Heather Blend

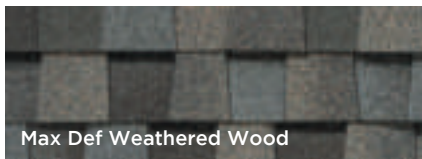


Max Def Weathered Wood

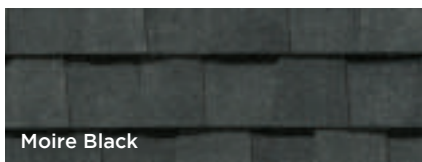


Moire Black

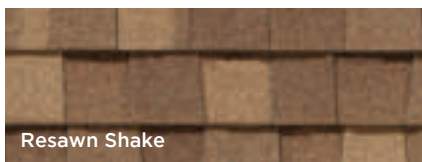

Resawn Shake

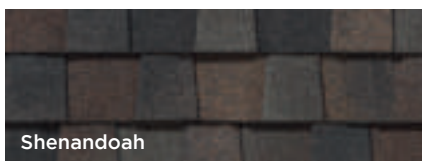

Shenandoah

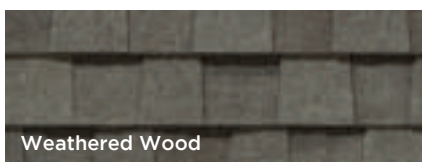

Weathered Wood

Landmark Impact Resistant, shown in Colonial Slate

LANDMARK® Impact Resistant

- Fiberglass-based construction
- 250 lb. per square
- Lifetime limited transferable warranty*
- 10-year SureStart™ protection
- 10-year StreakFighter® algae-resistance warranty
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5-98

Impact Resistance:

- UL2218 Class 4

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

DESIGNER SHINGLES



Landmark Solaris Gold, shown in Max Def Weathered Wood

COLOR AVAILABILITY

LANDMARK SOLARIS

Adobe

CRRC Product ID 0668-0091


Mauna Loa

CRRC Product ID 0668-0092

Sedona


CRRC Product ID 0668-0094

LANDMARK SOLARIS GOLD

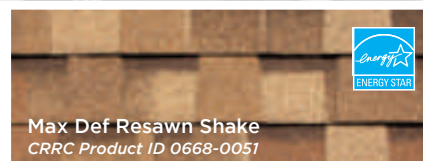

Max Def Resawn Shake

CRRC Product ID 0668-0051

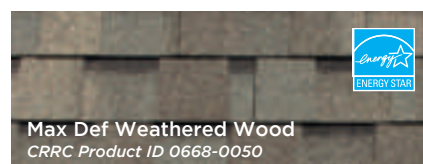

Max Def Weathered Wood

CRRC Product ID 0668-0050

LANDMARK SOLARIS PLATINUM




Coastal Tan

CRRC Product ID 0668-0079



Santa Fe

CRRC Product ID 0668-0080

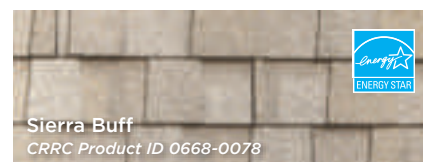

Sierra Buff

CRRC Product ID 0668-0078

LANDMARK SOLARIS®

Solar Reflective Shingles

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 229/250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

Product	Color	CRRC Rated Product Directory						CA 2016 Title 24*	Energy Star Certified
		Solar Reflectance		Thermal Emittance		Solar Reflectance Index			
		Initial	Aged	Initial	Aged	Initial	Aged		
Landmark Solaris®	Adobe	0.26	pending	0.92	pending	28	pending	YES*	NO
Landmark Solaris®	Mauna Loa	0.25	pending	0.92	pending	26	pending	YES*	NO
Landmark Solaris®	Sedona	0.27	pending	0.92	pending	29	pending	YES*	NO
Landmark Solaris® Gold	Max Def Resawn Shake	0.26	0.25	0.88	0.90	26	25	YES	YES
Landmark Solaris® Gold	Max Def Weathered Wood	0.25	0.24	0.90	0.89	25	24	YES	YES
Landmark Solaris® Platinum	Coastal Tan	0.40	0.36	0.91	0.90	45	40	YES	YES
Landmark Solaris® Platinum	Santa Fe	0.40	0.35	0.90	0.91	45	39	YES	YES
Landmark Solaris® Platinum	Sierra Buff	0.41	0.37	0.92	0.90	47	41	YES	YES


* Can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.

DESIGNER SHINGLES




*Roof - Highland Slate, shown in Fieldstone
Siding - Cedar Impressions® Double 7" Perfection Shingles, shown in Seagrass*


COLOR AVAILABILITY

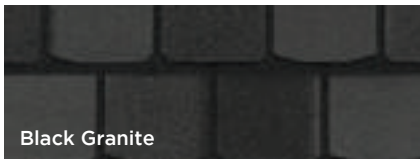


Black Granite

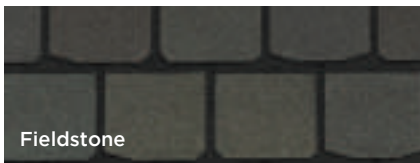

Fieldstone

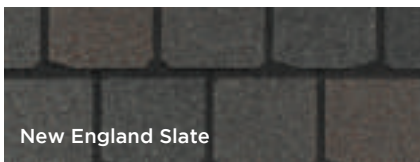

New England Slate

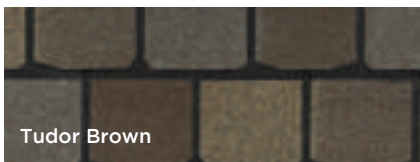

Tudor Brown

HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Impact Resistance:

- UL2218 Class 4

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



DESIGNER SHINGLES



NorthGate, shown in Max Def Moire Black

NORTHGATE®

- Two-piece laminated fiberglass-based construction
- Greater cold-weather flexibility, increased ductile properties, increased granule adhesion and enhanced crack resistance
- Classic shades and dimensional appearance of natural wood or slate
- 270 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F
- ASTM D7158 Class H

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:


- UL 2218 Class 4




COLOR AVAILABILITY

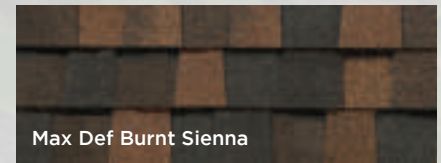


Max Def Burnt Sienna

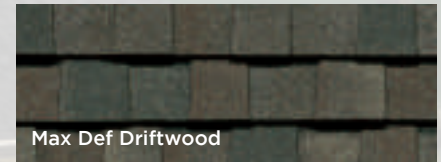


Max Def Driftwood

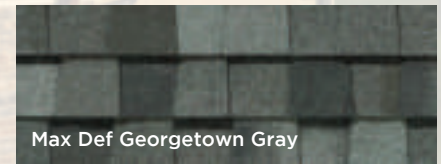


Max Def Georgetown Gray

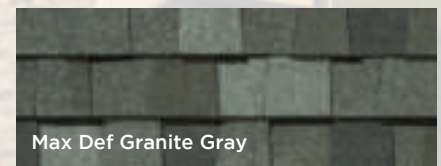


Max Def Granite Gray

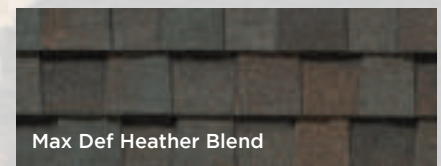


Max Def Heather Blend

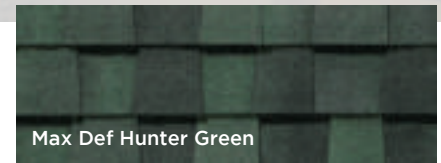


Max Def Hunter Green

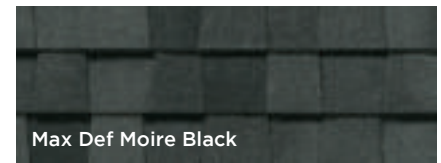


Max Def Moire Black

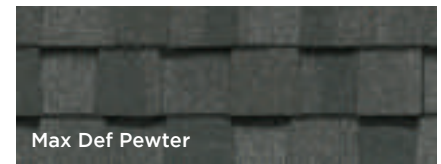

Max Def Pewter

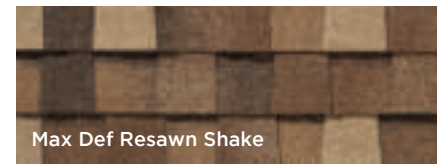

Max Def Resawn Shake

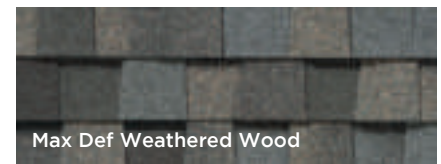


Max Def Weathered Wood



Silver Birch

CRRC Product ID 0668-0072

TRADITIONAL SHINGLES

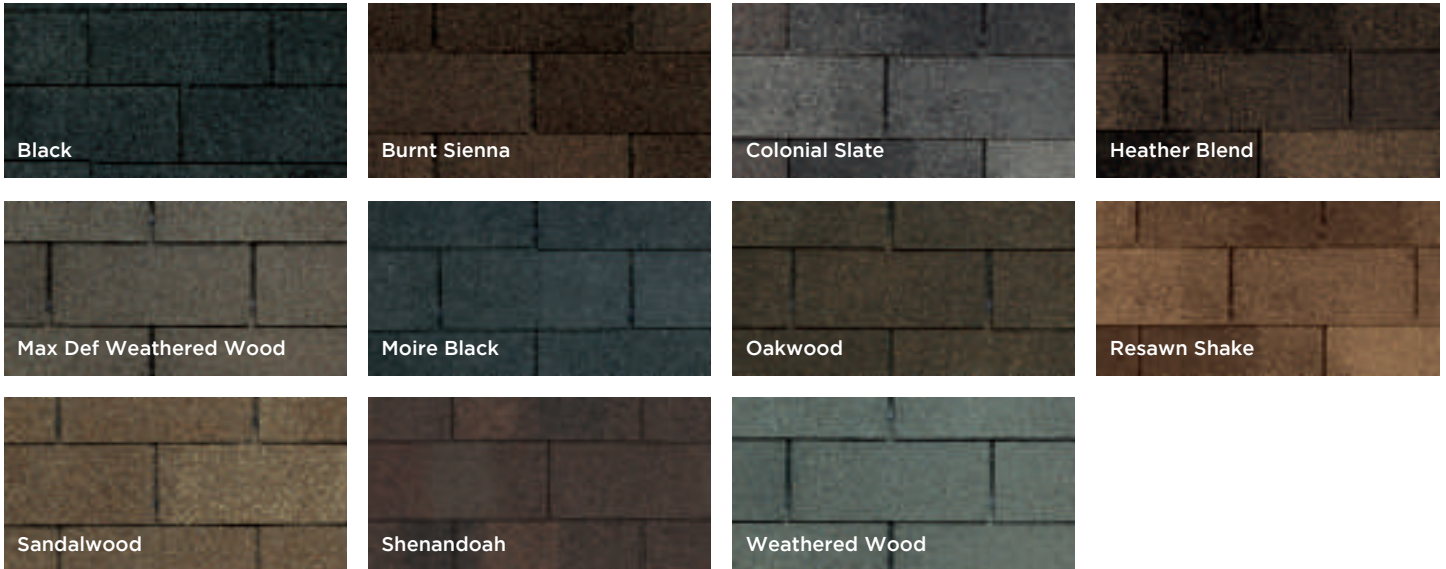

In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CERTAINEED XT™25

- Fiberglass composition
- Designed for long-lasting performance and durability
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance:
Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Black
Oakwood
Sandalwood
Weathered Wood

CERTAINEED XT™30

Impact Resistant

- Fiberglass composition
- Designed for long-lasting performance and durability
- 230 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart™ protection
- 5-year 70 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 4

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance:
Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

Burnt Sienna
Colonial Slate
Heather Blend
Max Def Weathered Wood
Moire Black
Resawn Shake
Shenandoah
Weathered Wood

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate and Carriage House colors
- Algae-resistant



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)




Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



Mountain Ridge®

- Fiberglass reinforced SBS modified bitumen
- Five layer design with tri-laminate base
- Available in 8" and 10" widths
- 8" exposure
- Algae resistant

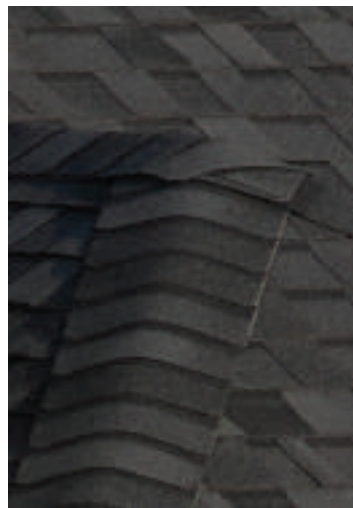

NorthGate® Ridge

- Hip and ridge for NorthGate shingles



Integrity Roof System™

Integrity is built from the bottom up. Layer-on-layer, only CertainTeed provides the peace of mind that comes with the best components performing together for peak efficiency.



1. Waterproof Underlayment

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams

2. Water-Resistant Underlayment

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

3. Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

5. Hip & Ridge Caps










Perfect finish for hip and ridge lines, complementing all CertainTeed shingles

6. Roof Ventilation









Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents

SELECTION GUIDE



LUXURY SHINGLES

Shingle Construction and Description			Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance
Arcadia		Four-layer laminate construction mimics the look of cedar shakes; Four cutouts on the top of each shingle add dimensionality; Variegated edges enhance the authentic wood shake appearance	450	✓	✓	✓	Class 3	Class F, 110 mph
Presidential Shake TL		Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look	475	✓	✓	✓		Class F, 110 mph
Presidential Shake Impact Resistant Version Available (Select colors)		Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look	355	✓	✓	✓	Class 4	Class F, 110 mph
Presidential Solaris Gold		Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look 	355	✓	✓	✓		Class F, 110 mph
Grand Manor		Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	✓	✓	✓		Class F, 110 mph
Belmont		Single layer, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate	275	✓	✓	✓	Class 4	Class F, 110 mph
Carriage House		Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied	350	✓	✓	✓		Class F, 110 mph
Landmark TL		Three-piece laminated fiberglass construction; Rustic appearance of hand-split wood shakes	305	✓	✓	✓		Class F, 110 mph

DESIGNER SHINGLES

Landmark Premium		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	300	✓	✓	✓		Class F, 110 mph
Landmark Pro		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	250	✓	✓	✓		Class F, 110 mph
Landmark Impact Resistant Version Available		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	230-235 250	✓	✓	✓	Class 4	Class F, 110 mph
Landmark Solaris		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate 	229/ 250	✓	✓	✓		Class F, 110 mph
Highland Slate		Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate	240	✓	✓	✓	Class 4	Class F, 110 mph
NorthGate		SBS modified asphalt two-piece laminated fiberglass-based construction; Greater cold-weather flexibility, increased ductile properties.	270	✓	✓	✓	Class 4	Class F, 110 mph
Patriot		Architectural style shingle; Single layer fiberglass-based construction; Intricate color blend drops combined with intermittent shadow lines	215	✓	✓	✓		Class F, 110 mph

TRADITIONAL SHINGLES

XT 30 Impact Resistant		Fiberglass composition; Designed for long-lasting performance and durability	230	✓	✓	✓	Class 4	✓
XT 25		Fiberglass composition; Designed for long-lasting performance and durability	205	✓	✓	✓		✓

** Wind warranty upgrade to 130 mph available.

Miami-Dade Product Control Acceptance	Conforms To CSA Standard A123.5	Limited Transferable Warranty Against Manufacturing Defects On Residential Applications <small>*50-Year on Group-owned or Commercial Applications</small>	StreakFighter® algae-resistance Warranty <small>(where available)</small>	SureStart Protection	Wind-Resistance Warranty <small>Upgraded wind warranty available. See warranty for details and limitations</small>	Shingle Size	Bundles Per Square
	✓	Lifetime*	15-year	10-year	15-year 110 mph **	37 1/2" x 19 1/2" 8" Exposure	6
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	4
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 40" 5 5/8" Exposure	4
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
✓	✓	Lifetime	10-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
	✓	30-year	10-year	8-year	10-year 110 mph	13 1/4" x 38 3/8" 5 5/8" Exposure	3
✓	✓	30-year	10-year	5-year	5-year 70 mph	12" x 36" 5" Exposure	3
✓	✓	25-year	10-year	5-year	5-year 60 mph	12" x 36" 5" Exposure	3

CertainTeed starter and CertainTeed hip and ridge required. *** With approved underlayment

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- Saves significant installation time

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Shangle® Ridge Accessory

- Hip and ridge for Grand Manor, Carriage House and Highland Slate; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

- Hip and ridge for Landmark Series; 30 lineal ft. per bundle; 24 shingles per bundle

Mountain Ridge®

- Hip and ridge for Arcadia, Presidential TL, Presidential Shake, Presidential Solaris, Landmark TL, Landmark Series and Landmark Solaris.

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal ft. per bundle; 24 shingles per bundle

Cedar Crest®

- Hip and ridge for Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle

NorthGate® Ridge

- Hip and ridge for NorthGate shingles

Ventilation

- CertainTeed Ridge Vent 9" filtered
- CertainTeed Ridge Vent 12" filtered
- CertainTeed Rolled Ridge Vent filtered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent

StreakFighter® algae-resistance protection

StreakFighter is a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. It helps safeguard a roof's beauty, especially in humid areas.



SureStart™ protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.



Roofers' Select®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind
- Meets underlayment requirements for the CertainTeed Integrity Roof System™




DiamondDeck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.



WinterGuard®

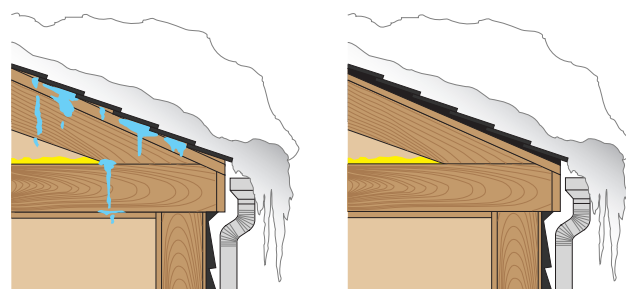

When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard is designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

For specific details and limitations, refer to the actual product warranties.

RoofRunner™

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.

MetaLayment® Self-Adhering Metal Underlayment


MetaLayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

Color Companion Products™ for Flat Roof Areas


With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in eight colors that complement some of the most popular CertainTeed shingles.

PRESIDIO[®]


Metal Roofing

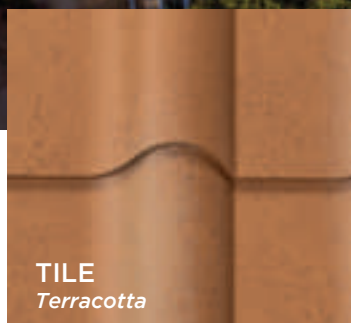

TILE
Terracotta



SHAKE
Sand Dune



SLATE
Artisan Slate

Because
it's more
than just
a roof

Presidio Metal Roofing takes the form of slate, tile or wood shake to create a beautiful roof that makes a lasting impression.

Replicate the charm of artisanal roofing at a fraction of the cost with durable, lightweight steel.

Includes a lifetime limited warranty. Laboratory tested to resist fire, wind and hail.

Features a proprietary multi-coat paint system that offers 17 hyper-realistic color options across all profiles, including 14 CRRC-rated cool roofing colors.

CertainTeed
SAINT-GOBAIN

RESIDENTIAL ROOFING




The best
formula under
one roof.

We start with the highest-quality raw materials and add state-of-the-art technology to monitor our manufacturing process and test our finished products. The result is superior performance from beginning to end.



Products available
in areas shown



NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.

learn more at: certainteed.com/roofing



CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com