
LEDGES®

Tegular
smooth texture



Ledges® I panels with Prelude® 15/16" suspension system (Pgs. 391-392)

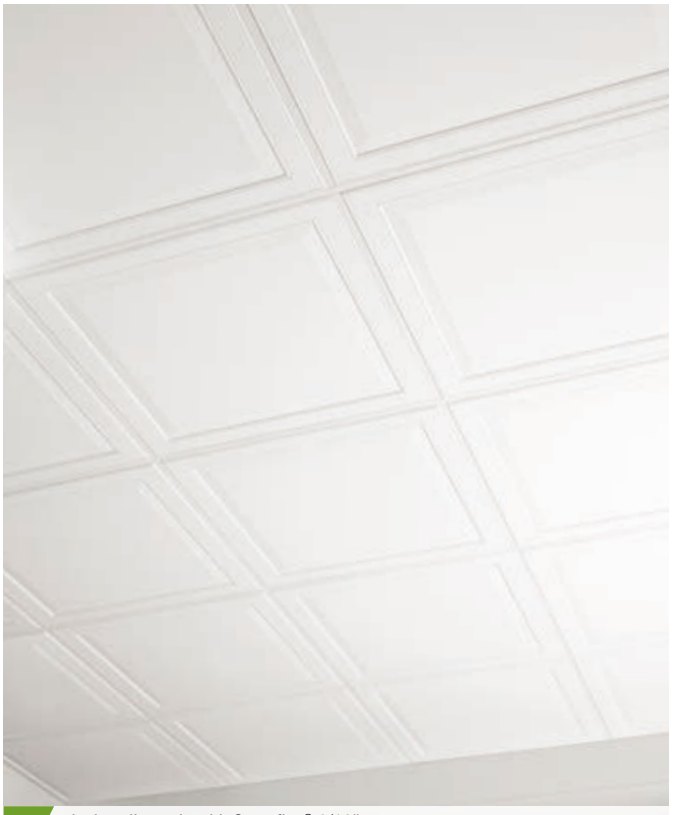

Ledges II panels with Suprafine® 9/16" suspension system (Pgs. 400-401)

The dimensional look of old-world plaster ceilings is available in two classic designs.

KEY SELECTION ATTRIBUTES

- Dimensional, sculptured visual
- Affordable and practical alternative to embossed plaster panels
- Non-directional visual reduces installation time and scrap

TYPICAL APPLICATIONS

- Department stores/retail
- Many types of commercial interiors

NOTE: Not recommended for areas requiring acoustical performance

COLOR

White (WH)

FACE VIEWS



Ledges® I panel

Ledges II panel

DETAILS



1. Ledges® I Flush Tegular
2. Ledges II Flush Tegular
3. Ledges I with Prelude 15/16" suspension system
4. Ledges II with Suprafine® 9/16" suspension system

UP TO 43% RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie

LEED®: energy management ✓, construction waste mgmt ✓, regional materials ✓, design for flexibility ✓, EPD ●, recyclable/extended producer resp. ✓, biobased materials ✓, recycled content ✓, sourcing of raw materials ✓, material ingredient reporting ●, low emitting/materials ✓, lighting quality ✓, acoustics ●

▲ LOCATION DEPENDENT

LEDGES®

Tegular
smooth texture

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance. $$$$

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	UL Classified Acoustics NRC	+ CAC	= Total Acoustics[1]	Fire Performance	Light Reflect	Anti-Mold & Mildew	Sag Resist	Durability	Recycled Content	Recycle Program	Warranty
LEDGES® I														
15/16" Flush Tegular 	3	**8011**	24 x 24 x 3/4" ⊞	N/A	35 •	–	Class A	0.80	Std	Std	Std	Std	•	1-Yr
LEDGES II														
9/16" Flush Tegular 	25	**8013**	24 x 24 x 3/4" □	N/A	35 •	–	Class A	0.80	Std	Std	Std	Std	•	1-Yr

[1] Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

SUSPENSION SYSTEMS

15/16"  Prelude®

9/16"  Suprafine®

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type III, Form 2, Pattern J Z
Fire Class A

Humidity/Sag Resistance
Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

Insulation Value
R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

1-Year Limited Warranty
Details at armstrongceilings.com

Weight; Square Feet/Carton
0.90 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

LEED® is a registered trademark of the U.S. Green Building Council
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2016-2017 AWI Licensing LLC Printed in the United States of America