

ULTIMA®
Vector®
fine texture



SUSTAIN®
High Performance
Sustainable
Ceiling Systems



DESIGNFlex™
A New World of Choice
for Ceiling Systems

DESIGNFlex™
CEILING SYSTEMS



Personalize Your Design!

Mix and match different sizes and materials to reinvent your ceiling. More at:
armstrongceilings.com/designflex



Ultima® Vector® panels with Prelude® XL® 15/16" suspension system (Pgs. 458-459)

plus capabilities
to do more



See more photos at:
armstrongceilings.com/photogallery
SEARCH: ultima

Ultima® Vector® panels are great for projects where plenum space is limited and a sleek, modern visual is desired.

KEY SELECTION ATTRIBUTES

- DesignFlex™ options include tailor-made sizes available to ship in 3 weeks
- Smooth, clean, durable finish – Washable, Scratch-resistant, Soil-resistant
- Ultima® Vector® panels are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- 1/4" reveal resulting in a monolithic appearance (Vector)
- Downward accessible for minimal plenum height (Vector)
- USDA Certified Biobased Product – 88%
- Visual coordinates with Optima® for mixed (open/closed plan) applications
- Item 1920 available with Create!™ printed images and patterns, see pages 245-247
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 1920



COLOR



White
(WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on page XXX.)



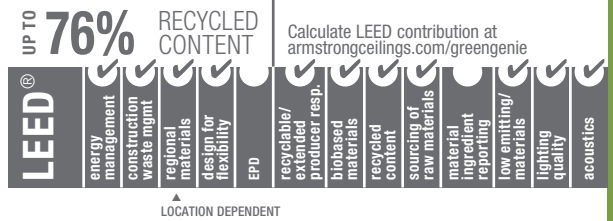
1. Ultima® Vector®
2. Ultima® Vector® with Prelude® 15/16" suspension system

ULTIMA®





Vector®
fine texture

DeclareSM
Living Building
Challenge Compliant

SUSTAINSM
High Performance
Sustainable
Ceiling Systems



VISUAL SELECTION

| Edge Profile | Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs | Item No. | Dimensions (Inches) |
|---|---|----------|---------------------|
| 1/4" Reveal | 74 | 1921 | 12 x 24 x 3/4" □ |
|   | | | |
|   | 74 | 1920 | 24 x 24 x 3/4" □ |

Size Capabilities

1 CTN MIN
Made-to-Order
Sizes
(3 Wks)

| Width | Length |
|--------------|-----------|
| 3/4" Thick | |
| 4" – 5-1/2" | 12" – 24" |
| 6" – 11-1/2" | 6" – 24" |
| 12" – 24" | 4" – 48" |

PERFORMANCE SELECTION

Dots represent high level of performance.

| UL Classified Acoustics | NRC | + | CAC | = | Total Acoustics ¹ | Fire Performance | Light Reflect | Mold & Mildew Protection | Sag Resist | Certified Low VOC Emissions | Wash | Scratch | Soil | Recycled Content | Recycle Program | 30-Yr Warranty |
|-------------------------|-----|---|-----|---|------------------------------|------------------|---------------|--------------------------|------------|-----------------------------|------|---------|------|------------------|-----------------|----------------|
| | | | | | | | | | | | | | | | | |
| N/A | N/A | | | | – | Class A | 0.90 | • | • | • | • | • | • | • | • | • |
| 0.70 | 33 | | | | – | Class A | 0.90 | • | • | • | • | • | • | • | • | • |
| N/A | N/A | | | | – | Class A | 0.90 | • | • | • | • | • | • | • | • | • |

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.
GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)

SUSPENSION SYSTEMS




15/16"



VECTOR – FIXTURE TRIMS

| Item No. | Length | Color | Substrate | Pcs per Carton |
|----------|--------|-------|--------------|----------------|
| 5790 | 12" | White | Extruded PVC | 48 |
| 5791 | 24" | White | Extruded PVC | 48 |
| 5792 | 30" | White | Extruded PVC | 48 |
| 5793 | 48" | White | Extruded PVC | 48 |

ACCESSORIES (must be ordered separately)

| Item No. | | Pcs per Carton |
|----------|--|----------------|
| 440A |  Vector Border Clip (For all installations) | 50 |
| 442A |  Vector Hold Down Clip (For all installations) | 50 |
| 7425 | 24" Stabilizer Bar | 100 |
| 7445 | 48" Stabilizer Bar | 100 |
| 7870 |  Spring Border Clip (For installations with the panel resting on the wall molding) | 1,000 |

PHYSICAL DATA

Material
Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane.

Surface Finish
DuraBrite with factory-applied latex paint.

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type IV, Form 2, Pattern E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Acoustical Performance
CAC testing conducted using Prelude® XL® suspension system.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton
1920 – 1.08 lbs/SF; 48 SF/ctn
1921 – 1.08 lbs/SF; 24 SF/ctn

Minimum Order Quantity
1 carton, excludes FastSize™ sizes

TechLine / 1 877 276 7876
armstrongceilings.com/commercial
(search: ultima)
BPCS-3313-618

LEED® is a registered trademark of the U.S. Green Building Council
Declare™ is a service mark of The International Living Future Institute
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2018 AWI Licensing LLC Printed in the United States of America

Armstrong®
CEILING & WALL SOLUTIONS

320

MINERAL FIBER