



In environments like these,
airborne dust is more than
just a nuisance.

Introducing Sheetrock® Dust Control Joint Compound

Proven to dramatically reduce airborne dust from sanding

- Specify for healthcare and educational facilities or any occupied space where cleanliness and IAQ are critical
- Less mess and airborne dust reduces impact on building ventilation systems
- Helps to maintain a cleaner, more comfortable environment for building occupants during construction
- Very low VOC content — meets or exceeds all EPA and OSHA requirements




Until now, sanding joint compound has been a messy job that introduces large amounts of airborne dust into new building or rehab environments and can cause problems in ventilation systems. SHEETROCK® brand dust control joint compound helps solve this problem with a patented formulation technology that binds up fine sanding residue to form heavier particles that fall straight to the floor instead of clouding the air. This innovative product is ideal for remodeling and repair projects in hospitals, schools, nursing homes and commercial office spaces—anywhere that cleanliness and indoor air quality are critical. Specify SHEETROCK dust control joint compound to reduce mess on the job and provide a more comfortable environment for building occupants.

The Difference is Clear

On-the-job testing conducted and analyzed by an independent third-party lab showed a considerable difference between SHEETROCK dust control joint compound and regular joint compound. Even 15 minutes after sanding stopped, airborne dust from the regular joint compound was appreciably higher than that from SHEETROCK dust control joint compound. The VOC content of SHEETROCK dust control joint compound is less than 2g/L.

**Comparison of Dust
Concentrations**

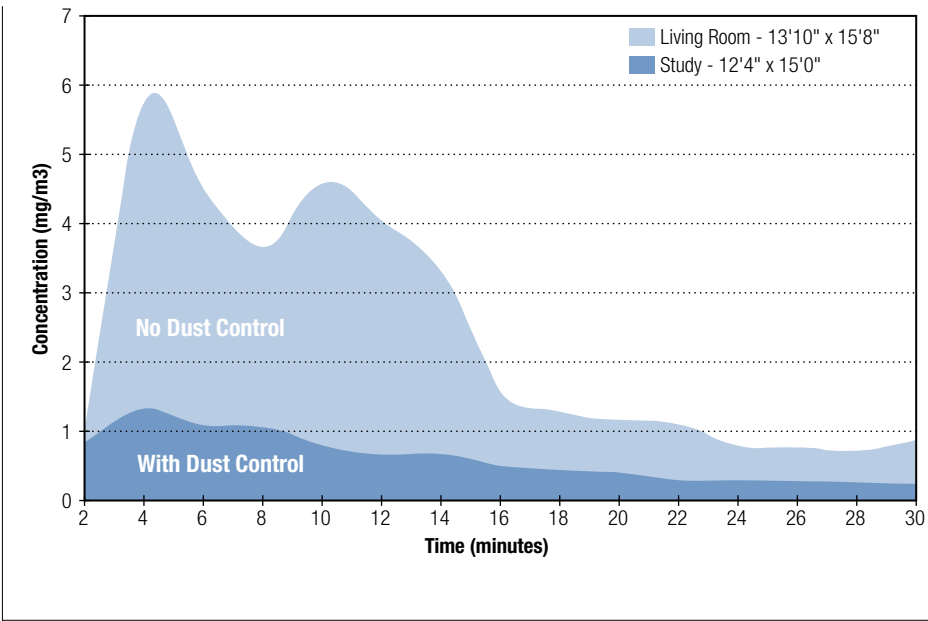

Product Information

See usg.com for the most up-to-date product information.

Trademarks

The following trademarks used herein are property of United States Gypsum Company or a related company: SHEETROCK, USG.

Notice

We shall not be liable for incidental or consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than their intended use. Our liability is expressly limited to replacement of defective goods. Any claim

shall be deemed waived unless made in writing to us within thirty (30) days from the date it was or reasonably should have been discovered.

Safety First!

Follow good safety and industrial hygiene practices during handling and installation of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.

