



WOODWORKS® Channeled Planks

CAD/Revit® drawings at:
armstrongceilings.com

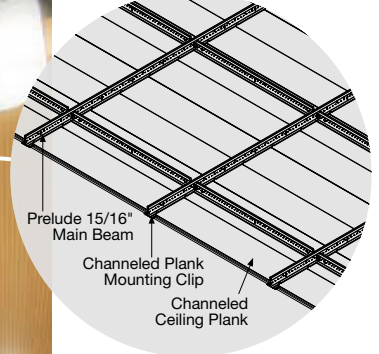

plus...
capabilities
to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

WoodWorks® Channeled plank with W9 perforation in Natural Variations™ Maple


These FSC®-certified ceiling panels are available in rich, real wood veneers or economical Wood Looks visuals.

KEY SELECTION ATTRIBUTES

- Create a continuous ceiling or cloud
 - Create a ceiling-to-wall transition
 - Real Wood Veneers
 - Acoustical backing improves sound quality
 - Shorter lead times and lower costs than custom millwork
 - Class A fire performance
- FSC® chain of custody (CoC) certified WoodWorks® products represent responsible production and consumption practices from the forest to the consumer
 - 100% Biobased content
 - BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits
- Larger Tegular and Vector® panel sizes – 24" x 48", 12" x 48", and 30" x 30" for even more design flexibility
 - BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits


VENEERS Due to printing limitations, shade may vary from actual product.

Natural Variations (Real Wood Veneers)

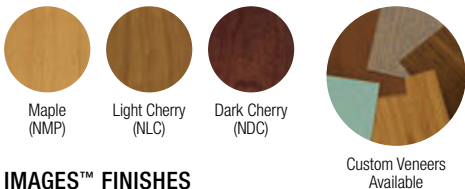

VENEER PERFORATION OPTIONS

(Actual 1:2 scale shown)

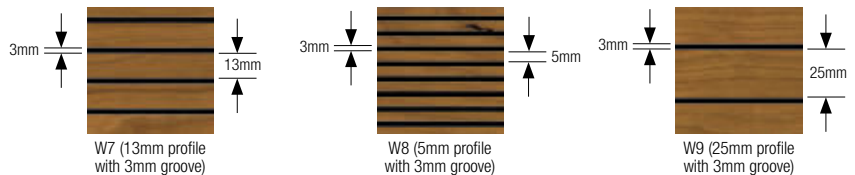


IMAGES™ FINISHES

(High Quality Printed Finishes)



IMAGES PERFORATION OPTIONS

(Actual 1:2 scale shown)

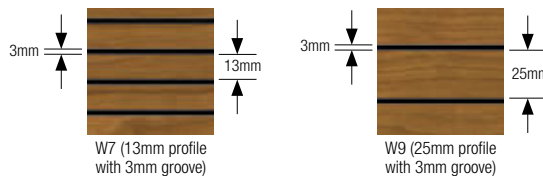

WOODWORKS® Channeled Planks



USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%



The mark of
responsible forestry

UP TO 92% RECYCLED CONTENT

For LEED contribution contact TechLine



VISUAL SELECTION

Edge Profile	Item No. ◆	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	Perforations	Fire Rating
FSC®-certified WOODWORKS® Channeled Plank Veneers Perforated (with Acoustical Fleece)				
Tongue-and-Groove 	5900C -----	5.553 x 96 x 3/4"	W7, W8, W9*	Class A
	5901C -----	5.553 x 120 x 3/4"	W7, W8, W9*	Class A
WOODWORKS® Channeled Plank Images™ Finishes Perforated (with Acoustical Fleece)				
Tongue-and-Groove 	6688C -----	5.553 x 96 x 11/16"	W7, W9*	Class A
	6689C -----	5.553 x 120 x 11/16"	W7, W9*	Class A

◆ When specifying or ordering, include the appropriate 5-letter perforation and color suffix (e.g., 6688CW Z N M P.)
* Size width for panels with W9 perforation is 5.393".

PERFORMANCE

Fire Rating
Class A
Class A
Class A
Class A

ACOUSTICAL INFORMATION

Dots represent high level of performance.


Perforation	NRC planks
W7 	0.50 0.70† •
W8 	0.75 0.95† •
W9 	0.50 0.75† •

† NRC when installed with acoustical infill (item 8200100 or 5479)


EXAMPLE: **6688C W7 NMP**

Panel Dimension/Type: 24" x 24" Tegular Perforation: W7 13mm Finish: Natural Variations™ Maple


INSTALLATION DETAILS



Ceiling Configuration with Clip 5839




Ceiling Configuration with Clip 5839 using Wall Furring Strips



Wall Configuration with Clip 5839

SUSPENSION SYSTEMS



CEILING PLANK CLIPS

Item Number	Description	Dimensions	Color	Pcs./Ctn.
5389	Channeled Panel Clip	N/A	N/A	250

ACCESSORIES

Natural Variations™ and Images™ finishes are designed to coordinate with each other. Trim and infill panels are available. See Pgs. 199-200 in this catalog or visit armstrongceilings.com/woodworks

PHYSICAL DATA

Material
FSC®-certified fire-retardant medium-density fiberboard with face-cut veneers (RA-COC-003601). For more information about FSC®-certified products, or to view our FSC®-certification letter, visit armstrongceilings.com/woodworksfsfc

Surface Finish
Clear or tinted semigloss coating

Fire Performance
ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Composite – Fire Class A

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks® panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Specification Consideration
Attention: For FSC certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
WoodWorks Channeled wood planks have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

Warranty
Details at armstrongceilings.com

Panel Weight
2.2 lbs/SF (Bulk packaged)

TechLine / 1 877 276-7876
armstrongceilings.com/woodworks
(search: woodworks channeled plank)

BPCS-5124-517

LEED® is a registered trademark of the U.S. Green Building Council
Revit® is a registered trademark of Autodesk, Inc.
Rainforest Alliance Certified™ is a trademark of Rainforest Alliance.
FSC® is a registered trademark of FSC Forest Stewardship Council, A.C., license code FSC-C007626. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2016-2017 AWI Licensing LLC Printed in the United States of America

