


# WOODWORKS® Channeled Tegular

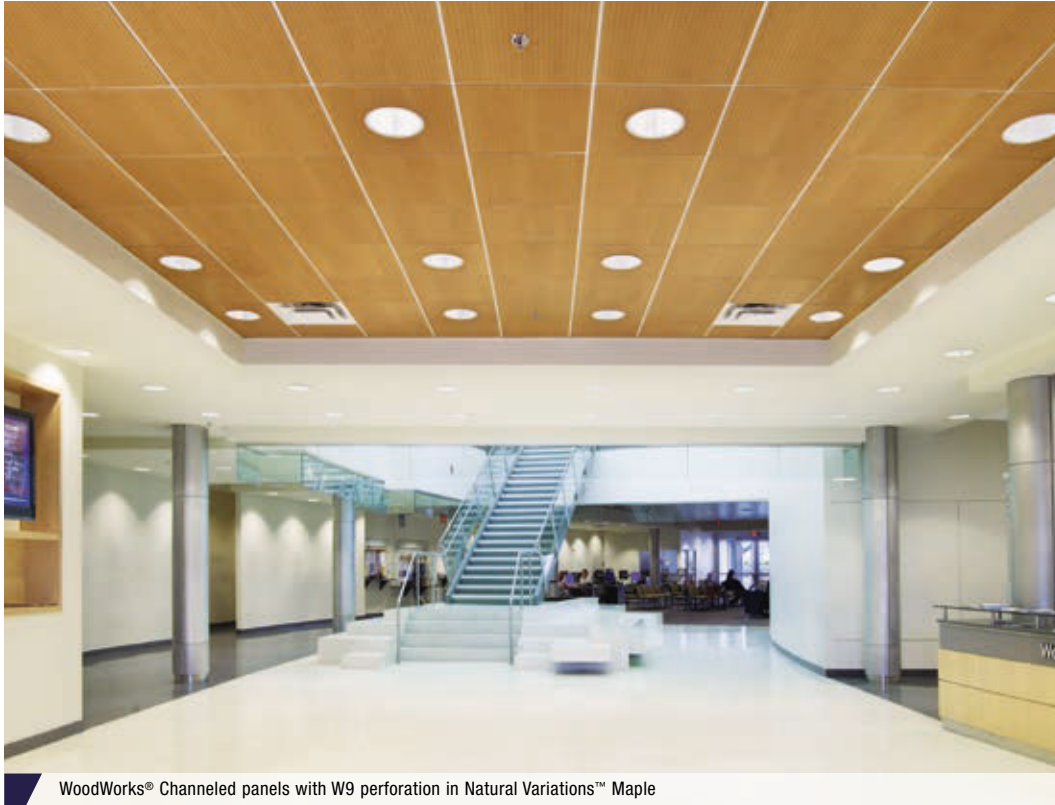

plus...  
capabilities  
to do more

armstrongceilings.com/capabilities  
See more photos at:  
armstrongceilings.com/photogallery

WoodWorks® Channeled panels with W9 perforation in Natural Variations™ Maple

Now get Total Acoustics® performance with WoodWorks® Channeled Tegular perforated panels – excellent noise reduction and sound blocking in one system.

## KEY SELECTION ATTRIBUTES



- Get total noise control and design flexibility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics® performance
- Real wood veneers or Images™ high-quality printed visuals
- Create a continuous ceiling, cloud, or ceiling-to-wall transition
- Acoustical backing improves sound quality
- Shorter lead times and lower costs than custom millwork
- Class A fire performance

### Natural Variations™ Finishes


- FSC® chain of custody (CoC) certified WoodWorks products represent responsible production and consumption practices from the forest to the consumer
- 100% Biobased content
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits

### Images™ Finishes

- Larger Tegular panel sizes – 24" x 48", 12" x 48", and 30" x 30" for even more design flexibility
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits


## VENEERS Due to printing limitations, shade may vary from actual product.

### Natural Variations (Real Wood Veneers)

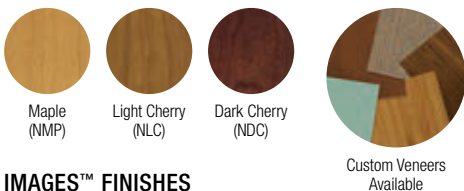


## VENEER PERFORATION OPTIONS

(Actual 1:2 scale shown)

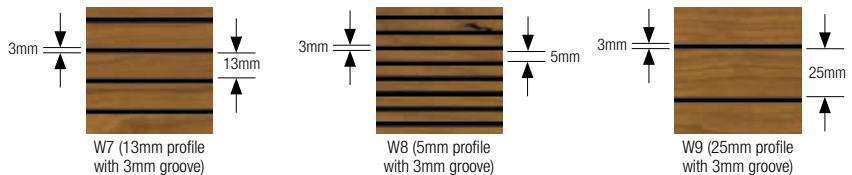


## IMAGES™ FINISHES

(High-Quality Printed Finishes)



## IMAGES PERFORATION OPTIONS

(Actual 1:2 scale shown)

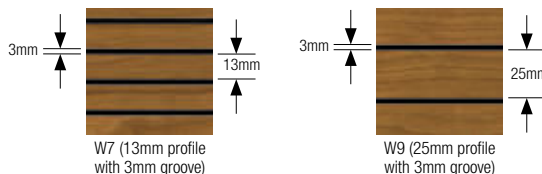

# WOODWORKS® Channeled Tegular



USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 100%



\*Images™ products are not FSC or Rainforest Alliance Certified

UP TO 92% RECYCLED CONTENT

For LEED contribution contact TechLine



## VISUAL SELECTION

Edge Profile	Item No. ◆	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	Perforations	Fire Rating
<b>FSC®-certified WOODWORKS® Channeled Tegular Veneers Perforated (with Acoustical Fleece)</b>				
9/16" Tegular	<b>5904</b> _____	24 x 24 x 3/4" □	W7, W8, W9	Class A
<b>WOODWORKS® Channeled Tegular Images™ Finishes Perforated (with Acoustical Fleece)</b>				
9/16" Tegular	<b>6683</b> _____	24 x 24 x 11/16" □	W7, W9	Class A
	<b>6681</b> _____	12 x 48 x 11/16" □		
	<b>6685</b> _____	24 x 48 x 11/16" □		
	<b>6687</b> _____	30 x 30 x 11/16" □		

◆ When specifying or ordering, include the appropriate 2-letter perforation suffix and the color suffix (e.g., 6683W Z P M P.)


## ACOUSTICAL INFILL PANELS

Item No.	Description	Dimensions (Inches) Nominal W x L x H	Color	Pcs/ Crtn
<b>1713</b>	School Zone® Fine Fissured™ Square Lay-in Acoustic Panel	24 x 24 x 3/4"	White	14
<b>2820</b>	Calla® Square Lay-in Acoustic Panel	24 x 24 x 1"	White	10

## ACCESSORIES

Natural Variations™ and Images™ finishes are designed to coordinate with each other. Trim and infill panels are available. See Pgs. 183-184 in this catalog.

## SUSPENSION SYSTEMS



Suprafine suspension system is available in many standard colors. All other suspension systems are available in standard White only. Other colors available as special order.

## PHYSICAL DATA

**Material**  
FSC®-certified fire-retardant medium-density fiberboard with face-cut veneers (RA-COC-003601). For more information about FSC®-certified products, or to view our FSC®-certification letter, visit [armstrongceilings.com/woodworksfscc](http://armstrongceilings.com/woodworksfscc)

**Surface Finish**  
Clear or tinted semigloss coating

**Fire Performance**  
ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. CAN/ULC S102 surface burning

characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

**Acoustical Performance**  
CAC testing conducted using Silhouette® suspension system.

**ASTM E1264 Classification**  
Composite – Fire Class A

**Application Considerations**  
Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks® panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

LEED® is a registered trademark of the U.S. Green Building Council. Rainforest Alliance Certified™ is a trademark of Rainforest Alliance. FSC® is a registered trademark of FSC Forest Stewardship Council, A.C., license code FSC-C007626. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates. © 2016-2017 AWI Licensing LLC. Printed in the United States of America

## PERFORMANCE

LOCATION DEPENDENT

## ACOUSTICAL INFORMATION

Dots represent high level of performance.

WITH INFILL PANEL

Performance determined by perforation size


Perforation	Infill Panel Item Number	NRC	CAC	Total Acoustics <sup>1</sup>
<b>W7</b> 13mm Profile Groove	8200100	0.80	N/A	–
	5823	0.80	N/A	–
	1713	0.70	42	BETTER
	2820	0.80	40	BEST
<b>W8</b> 5mm Profile Groove	8200100	0.80	N/A	–
	5823	0.80	N/A	–
	1713	0.70	42	BETTER
	2820	0.80	40	BEST
<b>W9</b> 25mm Profile Groove	8200100	0.80	N/A	–
	5823	0.80	N/A	–
	1713	0.65	42	GOOD
	2820	0.70	40	BETTER

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

For infill panel information, refer to Pg. 184.

### EXAMPLE: 6683 W7 PMP

Panel Dimension/Type: 24" x 24" Tegular  
Perforation: W7 13mm  
Finish: Images Maple

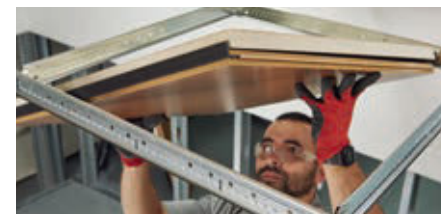

WoodWorks® Channeled ceiling panel with Calla® 2820 acoustic infill panel for Total Acoustics® performance

## Specification Consideration

Attention: For FSC certified wood products to maintain their CoC certification, products must be sold to a CoC certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

## Seismic Restraint

WoodWorks Channeled wood panels have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

## Warranty

Details at [armstrongceilings.com](http://armstrongceilings.com)

## Panel Weight

2.2 lbs/SF (Bulk packaged)

TechLine / 1 877 276-7876  
[armstrongceilings.com/woodworks](http://armstrongceilings.com/woodworks)  
(search: woodworks channeled tegular)

BPCS-5104-517

