

AXIOM® Drywall Trim

One-piece or Two-piece
straight & curved

Declare™
Living Building
Challenge Compliant

SUSTAIN™
High Performance
Sustainable
Ceiling Systems



Calculate LEED contribution at
armstrongceilings.com/greengenie


LOCATION DEPENDENT



This pre-engineered vertical trim solution for 5/8" drywall eliminates vertical framing and provides architectural detail.

KEY SELECTION ATTRIBUTES

- 2.5", 4", and 6" profile heights
- Axiom® trim is part of the Sustain™ portfolio and meets the most stringent sustainability compliance standards today
- Integrated and pre-punched tapping flange for drywall attachment
- Available in White, standard colors, and unfinished for field painting
- Straight and curved options available
- Pre-engineered compatibility with 5/8" drywall



MINIMUM BEND RADIUS FOR AXIOM ONE-PIECE TRIM


Inside: 2.5", 4", 6" – 24" Minimum
Outside: 36" Minimum

MINIMUM BEND RADIUS FOR AXIOM TWO-PIECE TRIM

36" Minimum

COLORS Due to printing limitations, shade may vary from actual product.

Standard



VISUAL SELECTION


Item No. ♦	Description	Dimensions
AXIOM® One-Piece Drywall Trim		
AX1PC2STR_ _	2.5" One-Piece Straight Drywall Trim	120 x 3/4 x 2.5"
AX1PC2CUR_ _	2.5" One-Piece Curved Drywall Trim	Vary x 3/4 x 2.5"
AX1PC4STR_ _	4" One-Piece Straight Drywall Trim	120 x 3/4 x 4"
AX1PC4CUR_ _	4" One-Piece Curved Drywall Trim	Vary x 3/4 x 4"
AX1PC6STR_ _	6" One-Piece Straight Drywall Trim	120 x 3/4 x 6"
AX1PC6CUR_ _	6" One-Piece Curved Drywall Trim	Vary x 3/4 x 6"

DETAILS

For more information, see submittal CS-3528.



CAD drawings available at armstrongceilings.com/axiom

One-Piece Drywall Trim: Integrated and pre-punched tapping flange for drywall attachment. Available in White, standard colors, and unfinished for field painting.

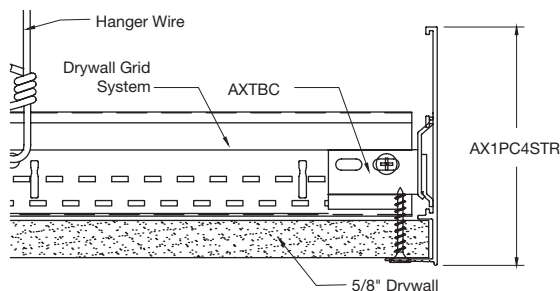

Two-Piece Drywall Trim: Integrated and pre-punched tapping flange for drywall attachment. Available in White, standard colors, and unfinished for field painting.

Axiom® factory-mitered inside and outside corner pieces are created to match your Axiom Trim channel order. These corners come as 2" – 12" long pieces that are assembled in the field for a clean mitered corner intersection.



Item No. ♦	Description	Dimensions
AXIOM Two-Piece Drywall Trim (used with AXIOM® Classic, see pg. 389)		
AXBSTR_ _	Axiom Straight Drywall Bottom Trim	120 x 3/4 x 5/8"
AXBTCUR_ _	Axiom Curved Drywall Bottom Trim	Vary x 3/4 x 5/8"

♦ Add the 2-digit color suffix to the item number when specifying or ordering (e.g., AX1PC2STR H A)

AXIOM® Glazing Channel

Trim for Glass Partitions
straight

Declare™
Living Building
Challenge Compliant

SUSTAIN™
High Performance
Sustainable
Ceiling Systems



50% RECYCLED CONTENT

Calculate LEED contribution at
armstrongceilings.com/greengenie

LEED	energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/extended producer resp.	bio-based materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting materials	lighting quality	acoustics
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LOCATION DEPENDENT													



Axiom® extruded aluminum Glazing Channel trim for 3/8" and 1/2" glass partition walls offers fully concealed integration with all Armstrong® acoustical and drywall ceiling systems for a clean installed visual so glass can disappear into the plenum.*

KEY SELECTION ATTRIBUTES

- 5 trim profile options to coordinate with lay-in, Tegular and Vector® ceiling panels and drywall grid system
- Axiom® trim is part of the Sustain™ portfolio and meets the most stringent sustainability compliance standards today
- Coordinated fit and finish ensures delivery of design intent
- Seismic solution for category D, E, F installations
- Coordinates with Armstrong® ceiling and suspension systems, custom colors available
- 10-Year Limited Warranty, 30-Year System Warranty

COLORS

Standard



White
(WH)



RAL® and Custom
Colors Available

* Interior Glass Partition installation is also addressed on Pg. 374 (Integrated Ceiling Solutions – Common Conditions)

VISUAL SELECTION

Item No.	Description	Dimensions	Profile
AXIOM® Glazing Channel Trim			
AXGC	Acoustical-to-Acoustical	120 x 2-7/16 x 2"	
AXGCS	Seismic Acoustical-to-Acoustical	120 x 3-1/4 x 2"	
AXGCV	Vector Acoustical-to-Acoustical	120 x 2-3/8 x 2-1/2"	
AXGCAD	Acoustical-to-Drywall	120 x 2-1/2 x 2"	
AXGCD	Drywall-to-Drywall	120 x 2-1/2 x 2"	


NOTE: Bottom and side U-Channels for glass installation provided by glazing contractor

ACCESSORIES

Item No.	Description	Dimensions
AX4SPICE	Splice Plate with Setscrews	—
AXCCLT	T-Bar Connector Twist Clip	—
new 7239	Adjustable Trim Clip**	—

**For use with specialty ceilings with grid offset greater than 3/8"; installs with Drywall Grid System. Contact TechLine for details.

CAD drawings available at armstrongceilings.com/axiom

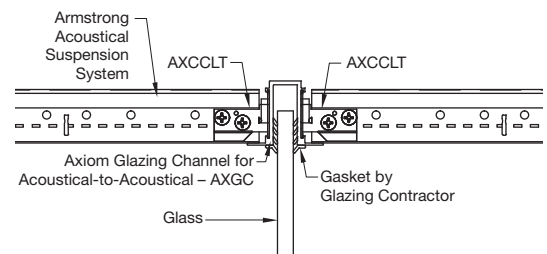

TRIM & TRANSITIONS

TechLine / 1 877 276 7876
armstrongceilings.com/axiom
(search: axiom)
BPCS-4983-318

LEED® is a registered trademark of the U.S. Green Building Council
RAL® is a registered trademark of RAL GmBH
Declare™ is a service mark of The International Living Future Institute

Armstrong®
CEILING & WALL SOLUTIONS

418