


AXIOM® Indirect Light Coves by Armstrong

Fixture Type:

Project Name:

Ordering Guide

Feature	Code	Options	Description
Series		17L	Cove-17
Mounting		CC	Armstrong Axiom Cove Ceiling
Fixture distribution		AI	Asymmetric Indirect
Row length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max length in row		02 03 04	24-1/16", 610mm 36", 914mm 48", 1219mm
Finish/Color		C1	Matte White
Color temperature		30K 35K 40K	3000K 3500K 4000K
Output/ft (specifiable in 50 lumens/ft increments)		I030 I100	300 (min) see "Driver" section for limitations 1000 (max)
Driver		NDM D10 D01 LHI	Non Dimming Osram 10% Dimming Osram 1% Dimming Hi-lume 1% 3-wire LED driver
Circuiting		1C	1 Circuit
Voltage		UNV 120 240	Universal Voltage (120 or 277) 120 Volt 240 Volt
Thru-wiring		W1 W2 W3 W4	No Thru Wire Provide Normal and Emergency Thru Wiring* Provide Normal Thru Wiring Only Provide Emergency Thru Wiring Only *Only applicable when specified with emergency
Optional Features	Code	Options	Description
Nightlight		_NL	Nightlight Circuit Required. Enter quantity. 2NL = 2 nightlight circuits/row

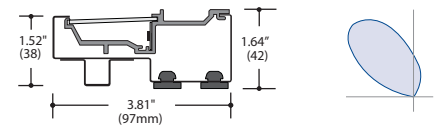

Key Features

- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- Asymmetric distribution
- Specifically designed to work with Armstrong Axiom Indirect Light Coves

Performance

Nomenclature	Lumens/ft	W/ft	Efficacy
I030	300	4.0	75.0
I035	350	4.6	76.1
I040	400	5.3	75.5
I045	450	6.0	75.0
I050	500	6.6	75.8
I055	550	7.3	75.3
I060	600	8.0	75.0
I065	650	8.8	73.9
I070	700	9.7	72.2
I075	750	10.5	71.4
I080	800	11.2	71.4
I085	850	12.1	70.2
I090	900	12.9	69.8
I095	950	13.6	69.9
I100	1000	14.4	69.4

(wattage may vary up to 5% from published)



 **Quick Find** litecontrol.com

17L-CC

AXIOM® Indirect Light Coves by Armstrong

Details

Construction:

Steel housing. Aluminum LED module snaps into housing.

Mounting:

Install in cove (provided by others). Interior cove dimensions should allow for a 4.5" x 1.5" cross-section. For maximum efficiency, wall and ceiling above cove should have matte surfaces with high reflectances.

Distribution

Cove Ceiling (CC-AI)-Fixture lumens reflected indirectly off ceiling.
Cove Wall (CW-AI)-Fixture lumens reflected indirectly off wall.

Fixture length:


02 (24-1/16" 610mm)
03 (36", 914mm)
04 (48", 1219mm)

Finish/Color:

Housing can be painted in C1 Matte White only. LED module is white. Visit www.litecontrol.com/finishes for details.

CCT:

30K-3000K output multiplier 0.975
35K-3500K output multiplier 1.0
40K-4000K output multiplier 1.05



Color Variation:

2 step MacAdam ellipse

Output (VI technology):

Variable Intensity (VI) technology allows precise specification of fixture output/wattage. Fixture will be programmed and labeled to specification. See output section for available increments.

Output:

Specify in 50 lumens increments/ft within the below range:

	Lumens/ft	Nomenclature
Min:	300	I030
Max:	1000	I100

Driver:

NDM: Non-dimming. Fixture will be wired for fixed light output.
D10: 100%-10% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
D01: 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
LHI: Lutron Hi-Lume 3 wire dimming compatible using Lutron A-Series driver. 100%-1% dimming range.

Circuiting:

1C (1 Circuit) Fixture wired for a single circuit.

Nightlight:

See separate LC-Nightlight spec sheet for additional details.

Emergency:

Integral-not available
Inverter-compatible (by others)

Thru wiring:

See separate LC-Thruwire spec sheet for additional details.

Power feed:

Fixture intended to be wired with 3/8" flexible whip.

Field accessibility:

LED boards and drivers can be accessed and removed from fixture, while installed.

CRI:

80 minimum

CCT	CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
30K	82	81	89	94	80	80	84	85	65	19	73	78	63	83	96
35K	83	82	90	94	81	81	85	87	68	24	75	78	62	84	97
40K	83	82	89	92	81	81	83	88	70	23	72	78	55	84	95

Rated Life:

Tested in accordance to LM79-2008 & derived from EPA TM21 calculator
L70: 160,000 (calculated per TM21 extrapolated curve)
L70: >36,288 (reported per TM21/LM80 6x's limitation)
L90: 50,000 (calculated per TM21 extrapolated curve)
L90: >36,288 (reported per TM21/LM80 6x's limitation)

Fixture weight:

2.5 lbs/ft.

Ratings:


CSA listed for damp locations. IBEW. AF of L.

Warranty:

LED boards-5 years
LED drivers (standard)-5 years
LED drivers (Lutron)-3 years

Recommended fixture positioning:


Positioning at Ends and Corners
Standard Reflector

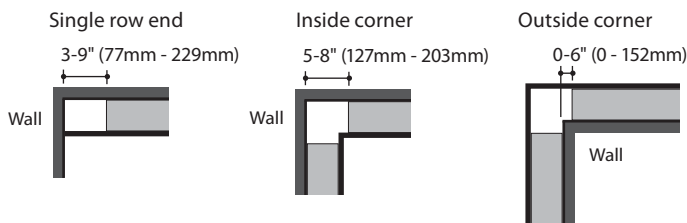

AXIOM® Indirect Light Coves by Armstrong

Photometry

Fixture: 17L-CC-AI-02-C1-35K-I085
CCT: 3500K
Output: I085
Nominal lumens: 850 lumens/ft
***Efficacy:** 76.5 lm/W
Test report: 17L-CC-AI-02-C1-35K-I085

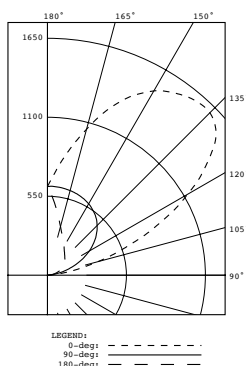

Zone	Zonal Lumens	
	Lumens %	Lamp %
0-30	0	0
0-40	0	0
0-60	0	0
0-90	0	0
90-120	640	23.3
90-130	1172	42.7
90-150	2172	79.1
90-180	2764	100
0-180	2746	100