

ADJUSTMENT GUIDES

# Finding harmony in the details.

Mode


---

HBF reveals the intentionality of design in everything we make through attention to detail and bespoke American craftsmanship.

Technical precision is married to honesty of materials and purity of form, making the use of your chair a simple process. Please follow these basic instructions for height, back height, locking and tilt/tension adjustments.


HBF PO BOX 8 HICKORY, NC 28603  
828 328 2064 [WWW.HBF.COM](http://WWW.HBF.COM)



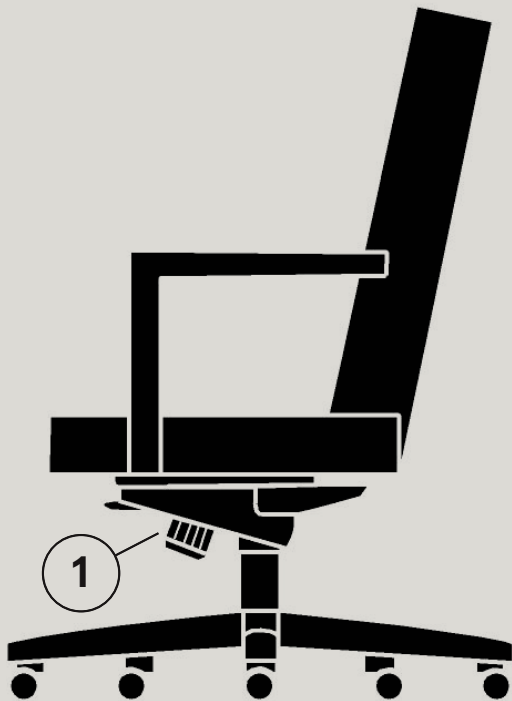

### 1—Tilt Tension

To adjust the tension to the backward tilt, grasp the textured hand wheel located underneath the front of the chair. A clockwise rotation while seated will loosen the tension, counterclockwise rotation will tighten the tension.

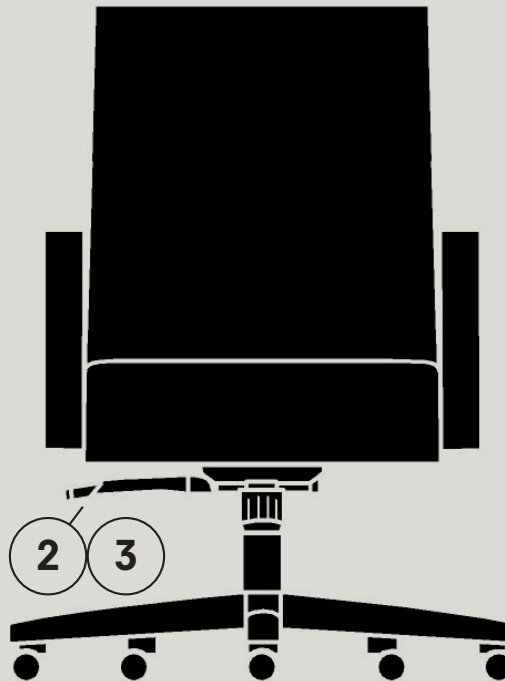

### 2—Height

While seated, lift the right hand lever. Your weight on the seat will lower the height. By leaning forward and transferring your weight to your feet you will raise the seat height by again lifting the lever.

### 3—Lock

Using the same lever used for height adjustment, lock the chair back while seated by pushing forward on the handle on the right side. The automatic searching system will find one of the five different positions available. Your chair comes equipped with an anti-shock feature which prevents the back from springing forward after unlocking the control. You must unlock by pushing back on the right handle while applying pressure to the chair back.