LEDS C4



-

35-6283-14-MS

V0

ATOM

Description
Spotlight

With adjustable lighting positioning. Lenses allow optimum control of illumination with minimal residual halo. Compact, high performance product. The optical module can easily be rotated 360º. Structure material: Aluminium. Structure finish: White. Warranty: 2 Years.

Finish
White

Material
Aluminium

IP20 31º 320º 90º 8

TECHNICAL CHARACTERISTICS

Light source
Light source: LED LUMENS
Output (W): 14.3 W
Total power consumption (W): 14.3 W
Color temperature: Warm White - 3000K
CRI: 90
Real Lumen: 861
Nominal Lumen: 1275
Qty Leds: 1
Lm/Real W: 60
Life Time: 40.000h L70B50
Bin / Grup: 30
MacAdam steps: 3 STEPS
UGR: 3.1
Photobiological risk: RG0

GEAR
Brand: NA
Gear included: Yes, electronic
Voltage / Frequency: 220-240V/50Hz
Power Factor: 1.00
Dimming protocol: Phase cut
Flickering: 100%

Luminaire
Warranty: 2 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435526842957
Net Weight (Kg): 0.480
Weight in Kg (packaged): 0.615
Packing: 135 x 95 x 260
Masterbox: 8

The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES

71-6437-23-00

Structure material: Aluminium
Dimensions: 72.4 x - x 28.8
Net Weight (Kg): 0.038

71-6437-14-00

Structure material: Aluminium
Dimensions: 72.4 x - x 28.8
Net Weight (Kg): 0.038



71-6279-60-00

Structure material: Aluminium
Dimensions: 62 x - x 2
Net Weight (Kg): 0.023

71-6280-00-00

Structure material: Methacrylate
Dimensions: 62 x - x 2
Net Weight (Kg): 0.045

71-6281-00-00

Structure material: Methacrylate
Dimensions: 62 x - x 2
Net Weight (Kg): 0.045

71-6282-60-00

Structure material: Aluminium
Dimensions: 75 x - x 74.5
Net Weight (Kg): 0.110

71-6283-60-00

Structure material: Aluminium
Dimensions: 75 x - x 104.5
Net Weight (Kg): 0.110

Tested Dimmers

The compatibility of the downlights with the dimmer has to be confirmed prior to installation.

- Vossloh-Schwabe DimONE 186607
- Vossloh-Schwabe DimONE BluetoothÂ® 186608
- Vossloh-Schwabe Dimmer 250 W 554591
- Vossloh-Schwabe Dimmer 500 W 554592
- Jung 225TDE Insta 51040
- Gira 030700 = Insta
- Berker 2874
- Berker 286710 Insta 5190
- Busch JÃ¤ger 6513 U-102
- Busch JÃ¤ger 6519U
- Sygonix 33595A
- Merten MEG5136-0000
- LeGrand ADW-ETL4-420VA
- Hager WUD82 + WYA920
- Merten 577899 + 570419
- Gira 2262 Anschn.
- Jung 225 NVDE Anschn.
- Berker 85421200 leading edge Anf. 2013 / equiv. Hager Anf. 2013 both Touch
- Sygonix 33596V leading edge
- Sygonix 33594C leading edge
- Sygonix 33594R leading edge
- Merten MEG5170-0300 + 343519
- Eltako EUD61NPN univ.
- Eltako EUD61M-UC univ.
- Eltako EUD61NP univ.
- Hager EVN002 univ.
- Hager EVN004 univ.
- Berker 16701 univ.
- Jung UD1255REG univ.
- Busch JÃ¤ger 6583 univ.
- Eltako EUD12D univ. / Eltako EUD12F univ. / Eltako EUD12Z univ. /
- Eltako EUD12Z univ. /

LEDS C4

ATOM M

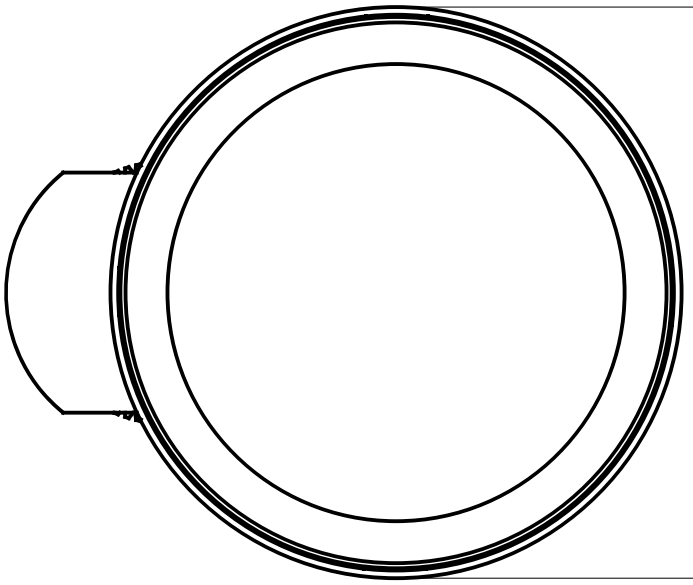

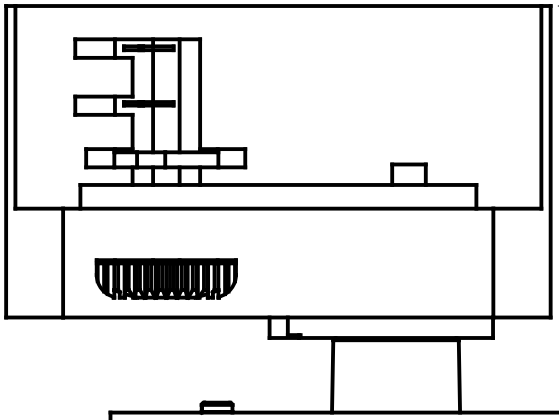

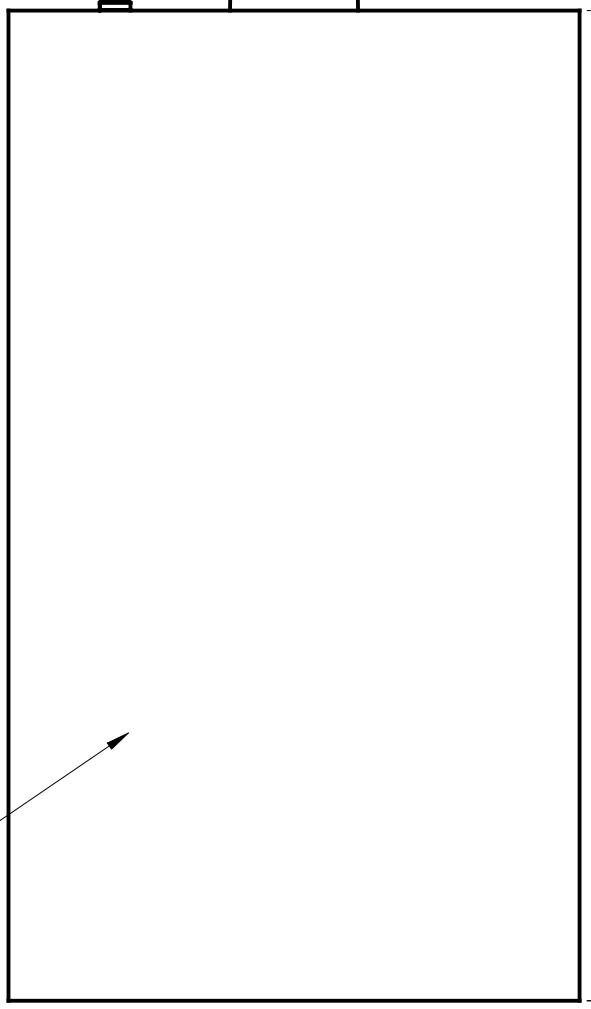

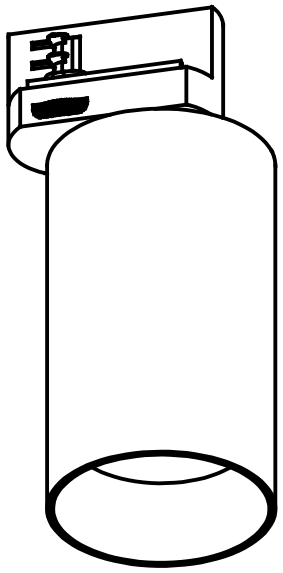

15-09-17

1

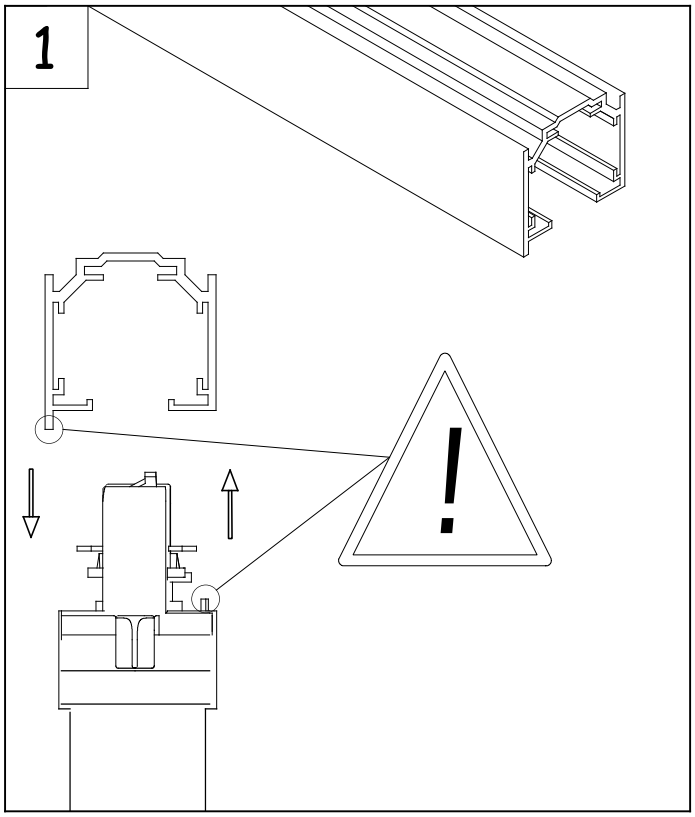

2

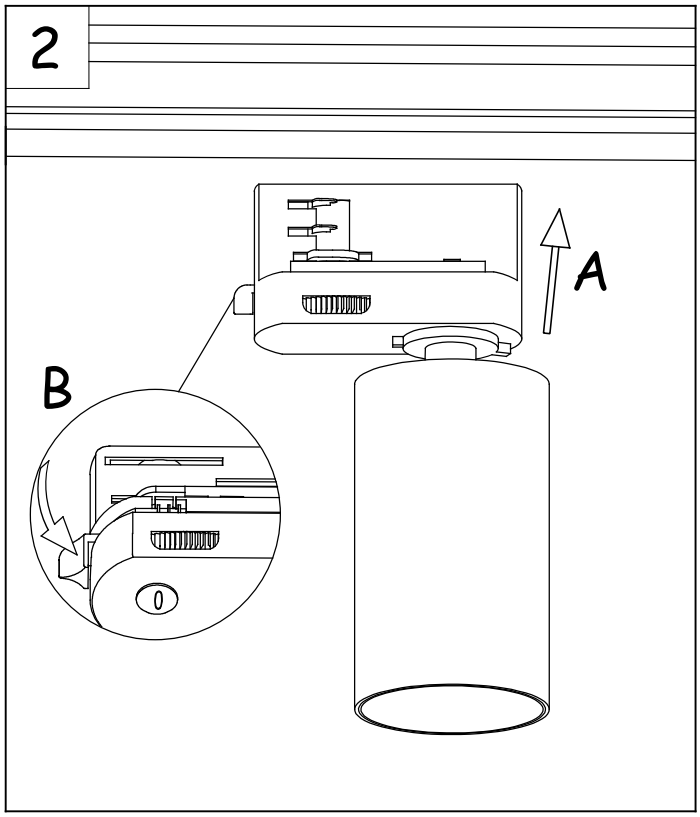

3

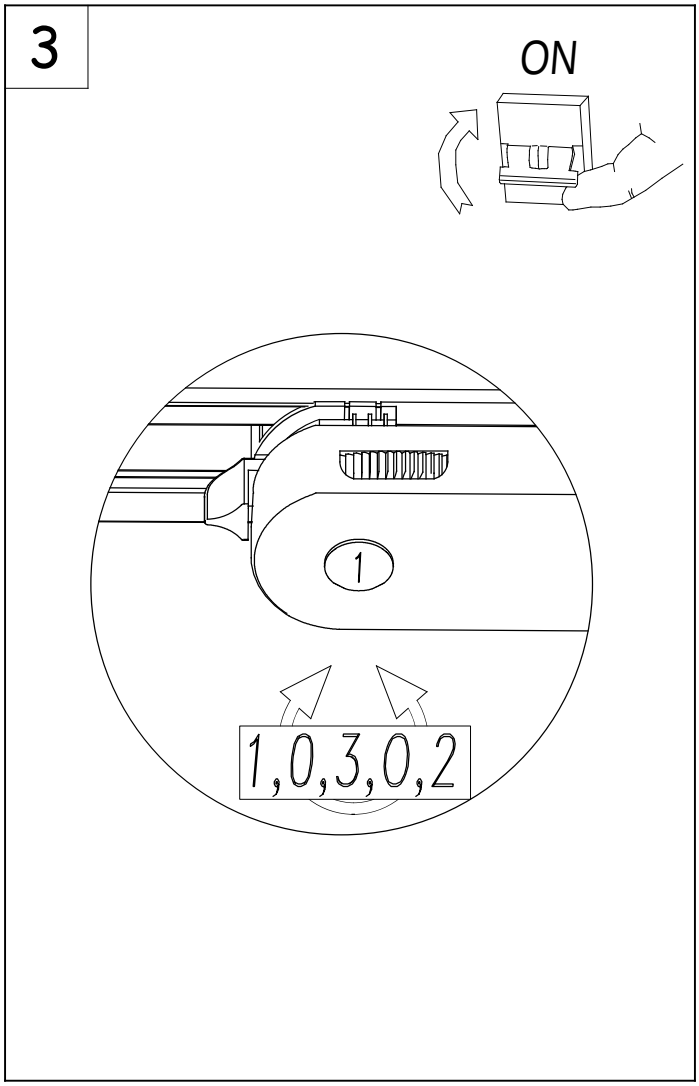
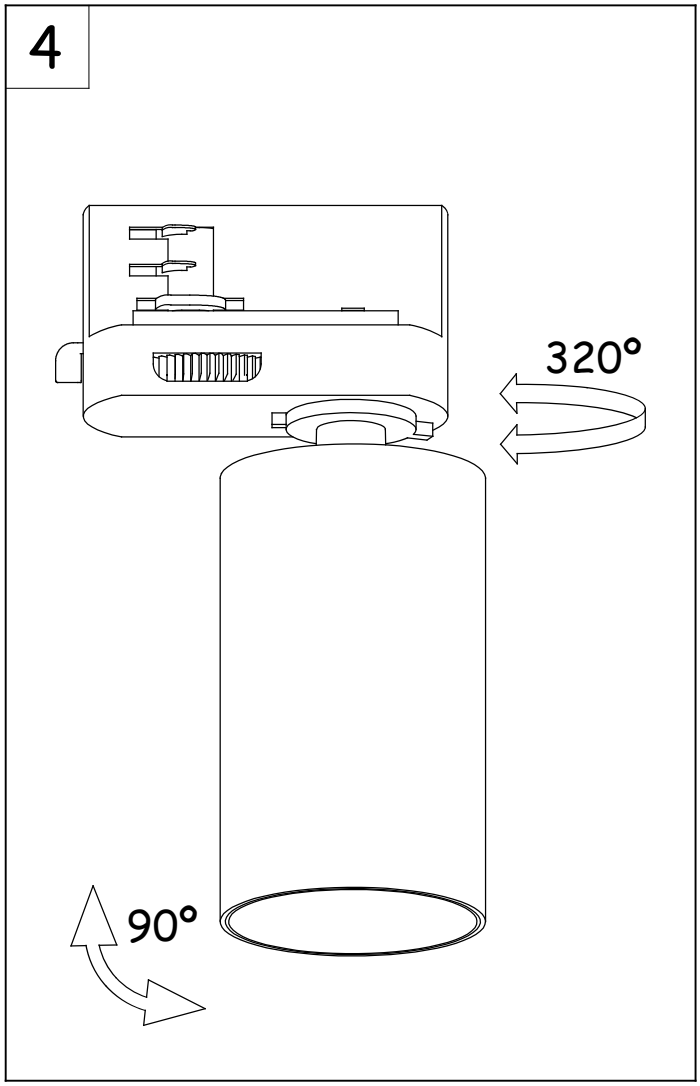
4