


55-9907-CA-CM

V0

GEA Cob Led Uplight recessed



Description

Floor recessed for outdoor use.

For uplighting. Electronic components are in a sealed internal compartment, completely separate from the compartment where the connection terminals are located. The unit will withstand a static weight of 1,800 Kg and the occasional transit of slow-moving vehicles. Includes 2 anti-glare accessories. Includes 2 reflectors. Includes flush-mounting box. Suitable for installation in marine environments. Maximum light surface temperature below 40°C. Adjustable light source. Structure material: Stainless steel AISI316, High purity aluminium. Structure finish: Polished, Black. Diffuser material: Glass. Diffuser finish: Tempered. Warranty: 2 Years.

Finish

Polished
Black
Tempered

Material

Stainless steel AISI316
High purity aluminium
Glass

IP67 IK10 15° ±15° 360° 4

TECHNICAL CHARACTERISTICS

Light source

Light source: LED CREE
Output (W): 16W
Total power consumption (W): 17.6W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 1638
Nominal Lumen: 2095
Qty Leds: 1
Lm/Real W: 93
Life Time: 50.000h L70B30
Bin / Grup: 40H
MacAdam steps: 2 STEPS
UGR: 11.6
Photobiological risk: RG1

GEAR

Brand: EAGLERISE
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.94

Luminaire

Temperature on the surface: 40.00
Recessed: Si
Seaside: Yes
Warranty: 2 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381439927
Net Weight (Kg): 2.075
Weight in Kg (packaged): 2.360
Packing: 190 x 190 x 165
Masterbox: 4


The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES



71-9995-DC-DC

Structure material: cement
Dimensions: 300 x 300 x 162
Net Weight (Kg): 12.000

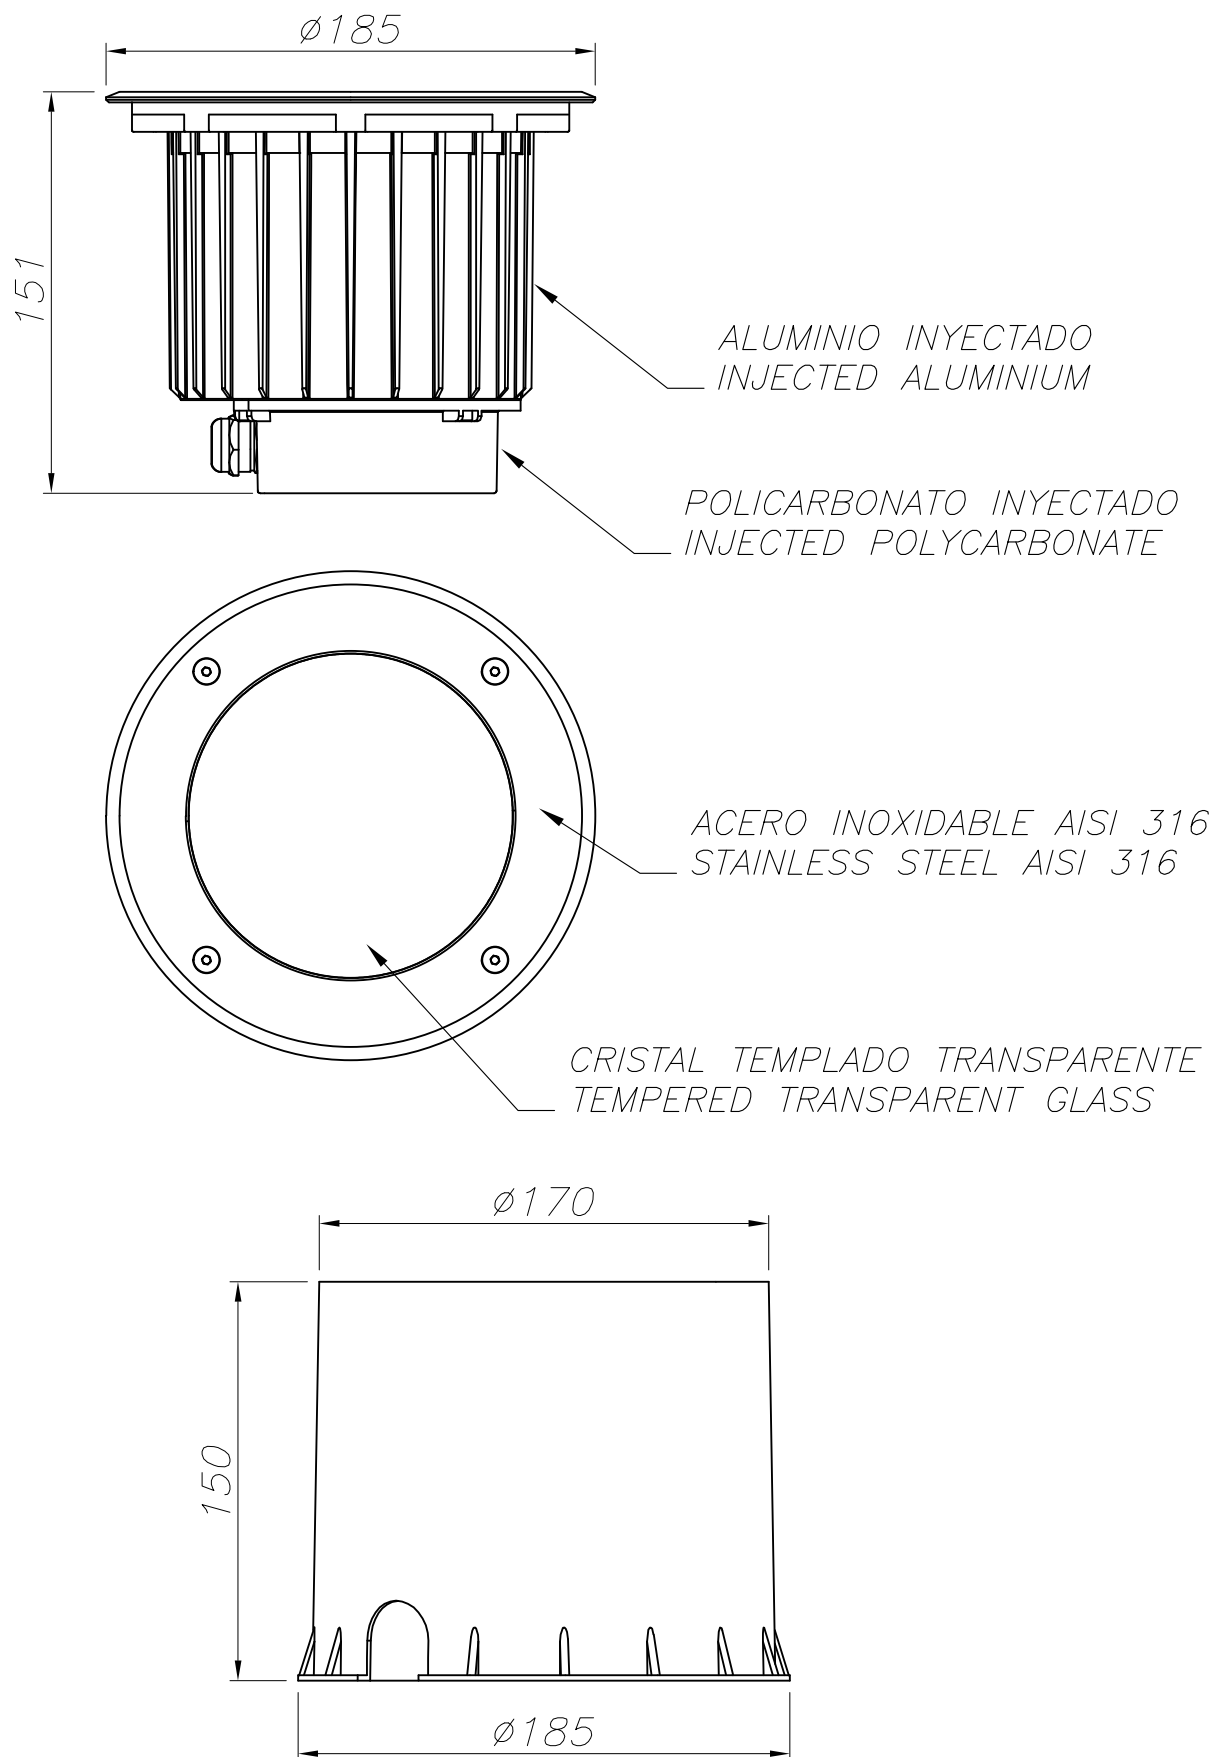

CAJA DE EMPOTRAR
FLUSH FITTING BOX

