


55-9979-CA-CL

V0

GEA Power Led Pro Uplight recessed

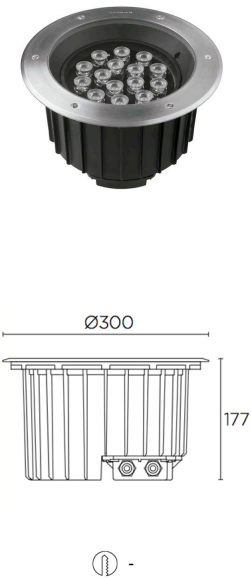

Description
Floor recessed

For uplighting. Electronic components are in a sealed internal compartment, completely separate from the compartment where the connection terminals are located. The unit will withstand a static weight of 1,800 Kg and the occasional transit of slow-moving vehicles. Includes flush-mounting box. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Cable meters included: 2.5. Adjustable light source. Structure material: Stainless steel AISI316, High purity aluminium. Structure finish: Polished, Black. Diffuser material: Glass. Diffuser finish: Tempered. UV protection. Warranty: 2 Years.

Finish
Polished
Black
Tempered

Material
Stainless steel AISI316
High purity aluminium
Glass

 IP65/IP67 IK10  10°  ±15°  1

TECHNICAL CHARACTERISTICS

Light source

Light source: LED CREE
Output (W): 37.9 W
Total power consumption (W): 43.6 W
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 3934
Nominal Lumen: 4230
Qty Leds: 15
Lm/Real W: 90
Life Time: 50.000h L90B10
Bin / Grup: 7C1 o 7B4
MacAdam steps: 3 STEPS
UGR: 8.2
Photobiological risk: RG2

GEAR

Brand: MEAN WELL
Gear included: Yes, electronic
Voltage / Frequency: 100-240V/50-60Hz
Power Factor: 0.96
Dimming protocol: 1..10V
Flickering: 1.5%

Luminaire

Double cable exit: Yes
Drainage: Yes
Recessed: Si
Public Areas: 1500
Seaside: Yes
Cable meters included: 2.5
Uv Protection: Yes
Warranty: 2 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435526844708
Net Weight (Kg): 6.555
Packing: - x - x -
Masterbox: 1

The photograph may not match the reference exactly. Please read the product description to identify the finish.

