

55-9970-CA-CM

V0

GEA Power Led Pro Uplight recessed

Description

Floor recessed for outdoor use.

For uplighting. Electronic components are in a sealed internal compartment, completely separate from the compartment where the connection terminals are located. The unit will withstand a static weight of 1,800 Kg and the occasional transit of slow-moving vehicles. Includes flush-mounting box. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Adjustable light source. Structure material: Stainless steel AISI316, Aluminium. Structure finish: Polished, Black. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 2 Years.

Finish
Polished
Black
Transparent

Material
Stainless steel AISI316
Aluminium
Glass

 IP65/IP67 IK10  61°  ±15°  4

TECHNICAL CHARACTERISTICS

Light source
Light source: LED CREE
Output (W): 16W
Color temperature: Neutral white - 4000K
CRI: 75
Real Lumen: 1436
Nominal Lumen: 1777
Qty Leds: 6
Lm/Real W: 90
Life Time: 50.000h L70B30
Bin / Grup: 5A3 o 5D2
MacAdam steps: 2 STEPS
UGR: 19.2
Photobiological risk: RG2

GEAR
Brand: EAGLERISE
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.90

Luminaire
Double cable exit: Yes
Drainage: Yes
Public Areas: 1800
Seaside: Yes
Uv Protection: Yes
Warranty: 2 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435381463434
Net Weight (Kg): 2.327
Weight in Kg (packaged): 2.475
Packing: 190 x 190 x 175
Masterbox: 4


The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES




71-9995-DC-DC

Structure material: cement
Dimensions: 300 x 300 x 162
Net Weight (Kg): 12.000

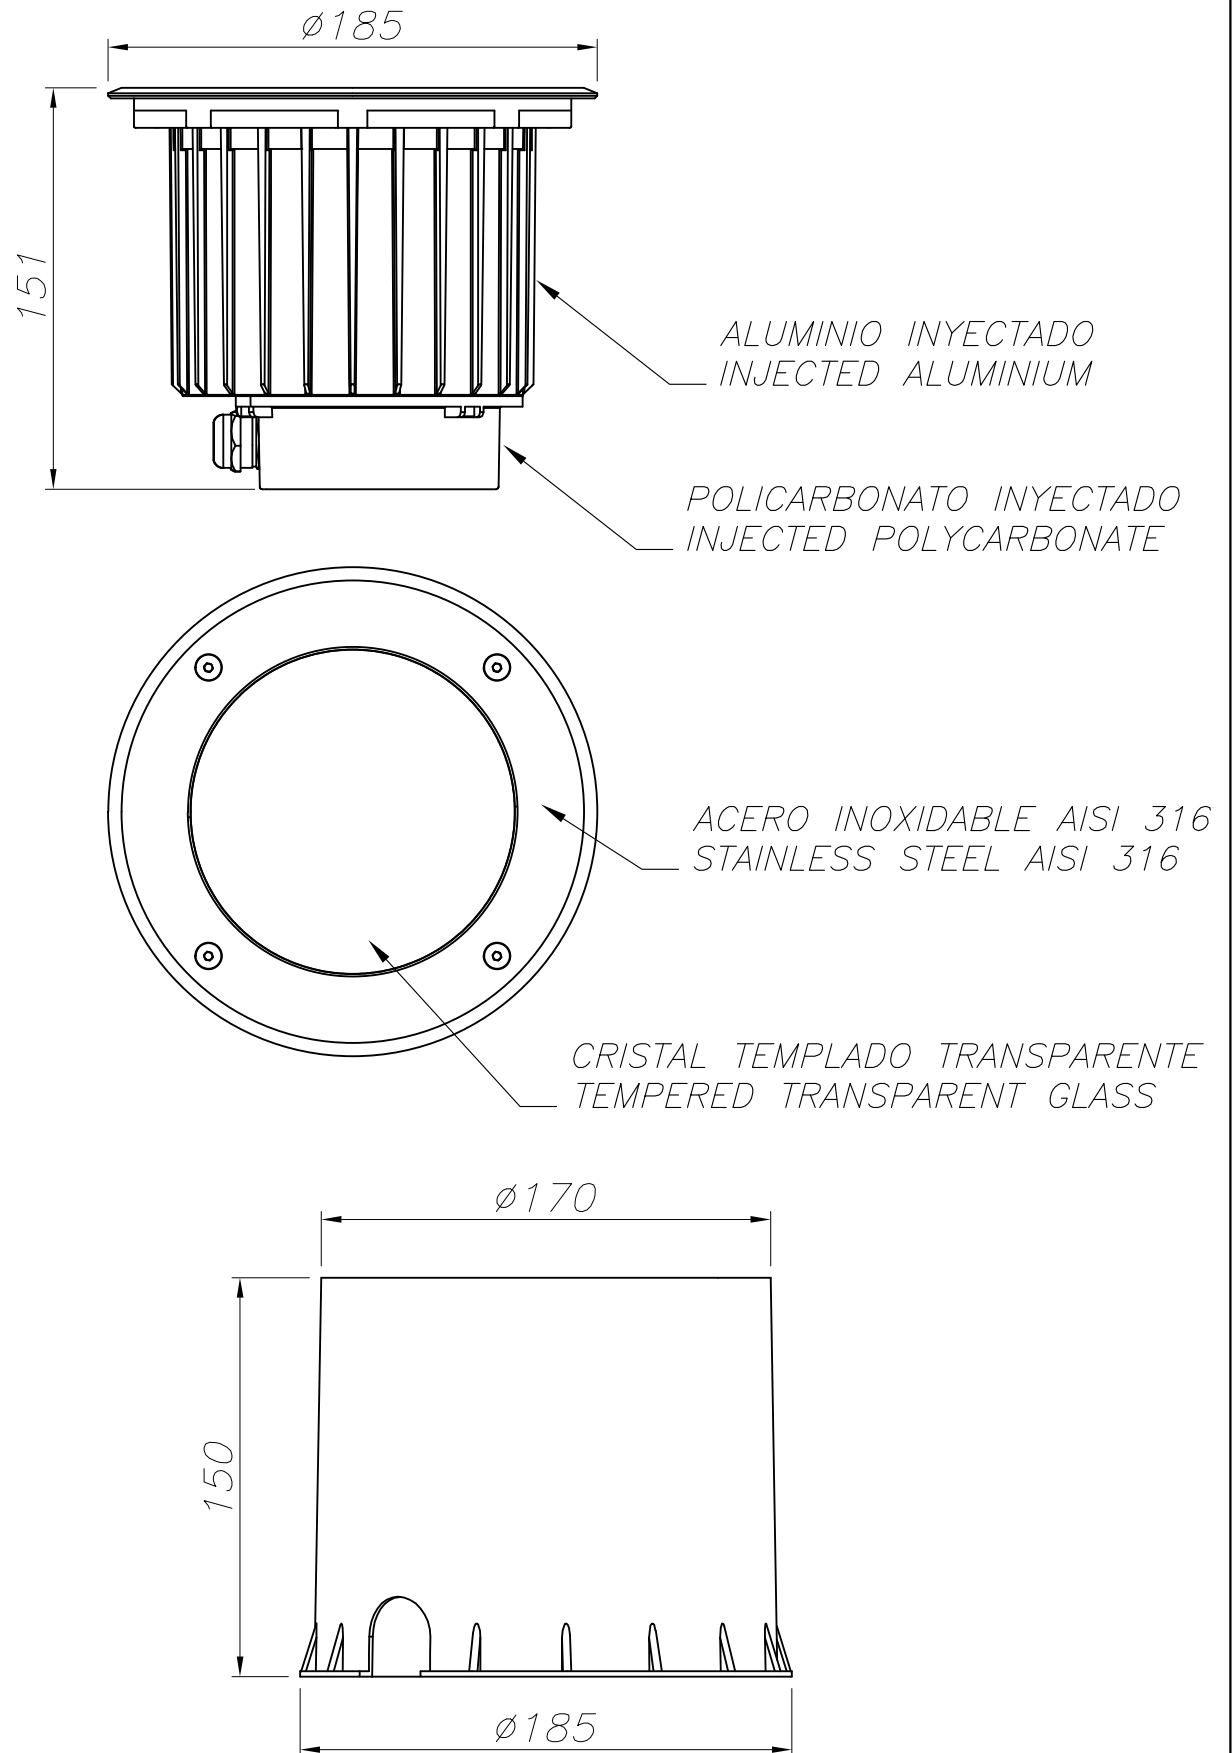


CAJA DE EMPOTRAR
FLUSH FITTING BOX


①




10l / 15min

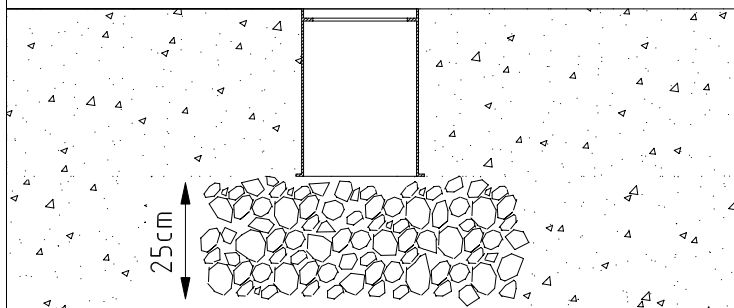


②

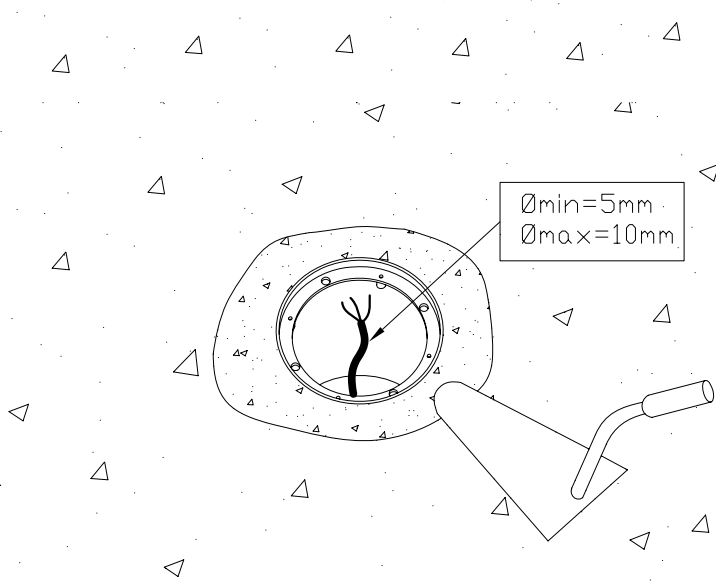


③

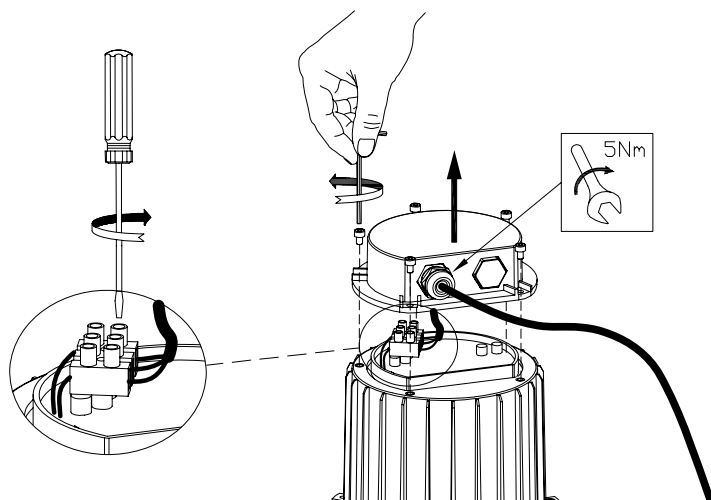

④

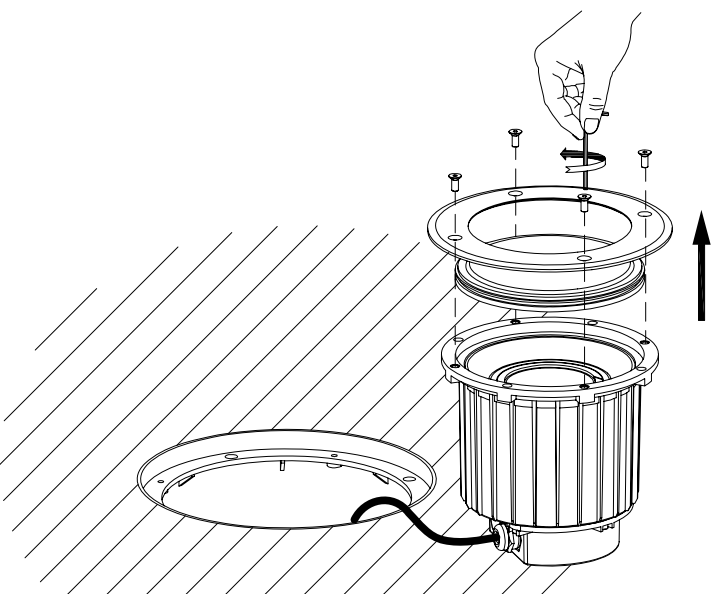

⑤

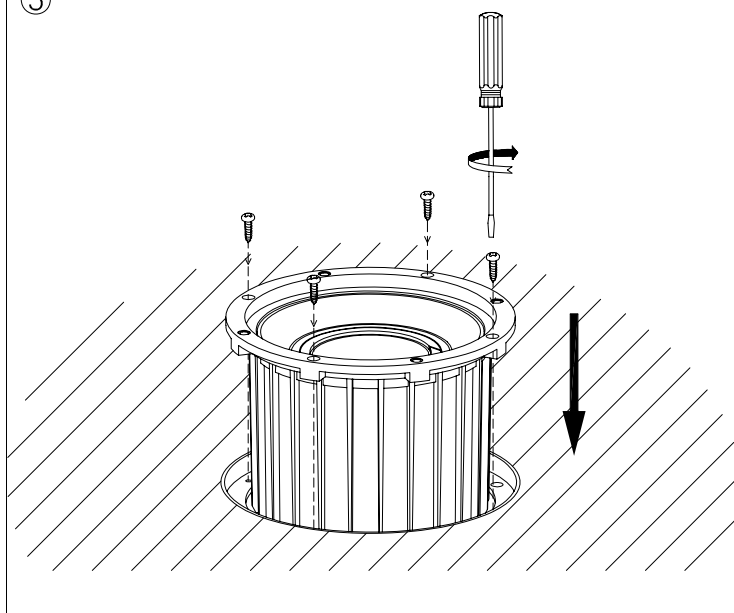

⑥

