

05-9984-34-CL

V0

Midi Spotlight




Description
Spotlight LED

For downlighting.. Includes visor. Suitable for installation in marine environments. Cable meters included: 1.5. Adjustable light source. Structure material: Silver anodized aluminium. Structure finish: Grey. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 2 Years.

Finish
Grey
Transparent

Material
Silver anodized aluminium
Glass



IP65 IK05 46° +90°, -45° 12



TECHNICAL CHARACTERISTICS

Light source
Light source: LED CREE
Output (W): 6.3 W
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 297
Nominal Lumen: 755
Qty Leds: 3
Lm/Real W: 50
Life Time: 54.000h L90B10
Bin / Grup: 7C1 o 7B4
MacAdam steps: 3 STEPS
UGR: 12.5
Photobiological risk: RG1

GEAR
This item requires gear. It is not included.
Voltage / Frequency: max. 700mA

Luminaire
Double cable exit: No
Drainage: No
Seaside: Yes
Cable meters included: 1.5
Uv Protection: Yes
Warranty: 2 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435526846511
Net Weight (Kg): 0.000
Packing: - x - x -
Masterbox: 12

The photograph may not match the reference exactly. Please read the product description to identify the finish.


OPTIONAL ACCESSORIES




71-E014-24-24

Structure material: Nylon
Dimensions: 45 x 165 x 37
Net Weight (Kg): 0.225

ALUMINIO ANODIZADO
ANODIZED ALUMINIUM


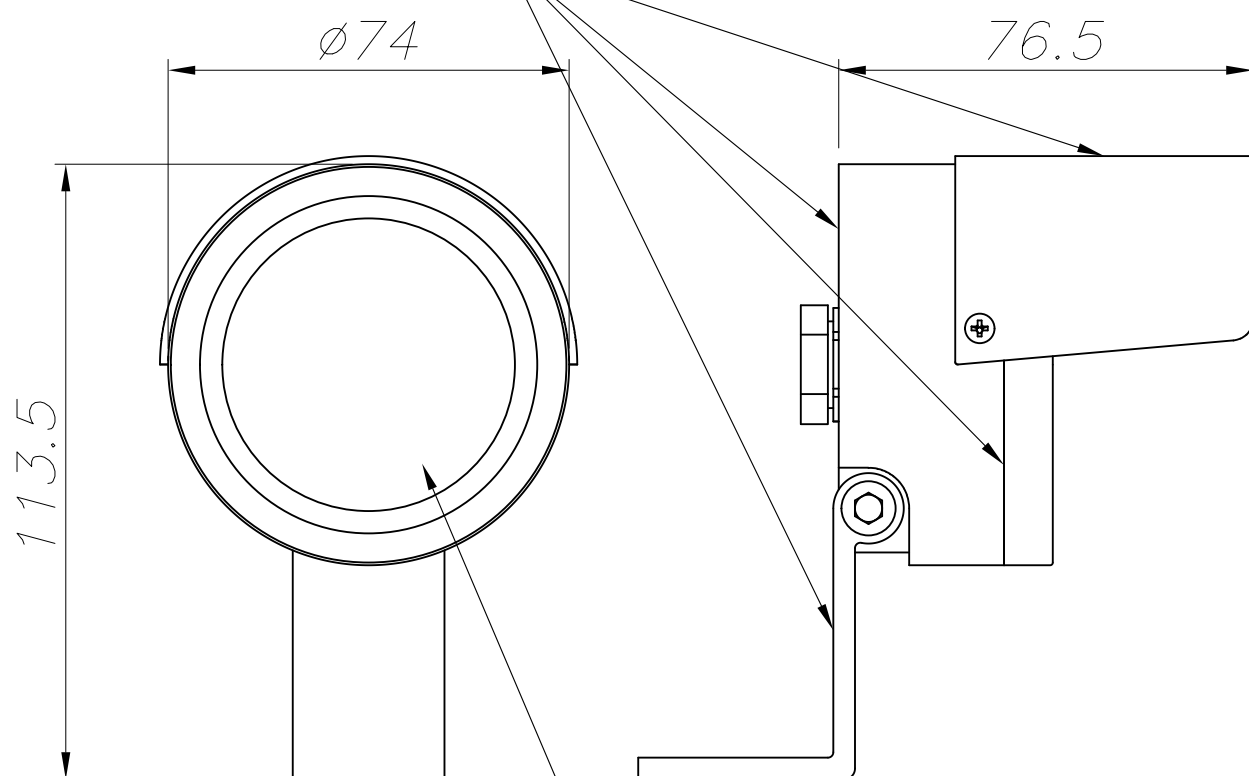


CRISTAL TRANSPARENTE
TRANSPARENT GLASS

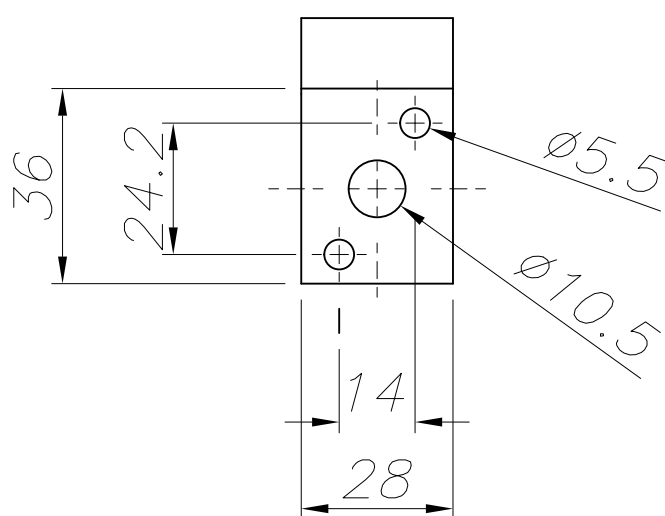

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

A

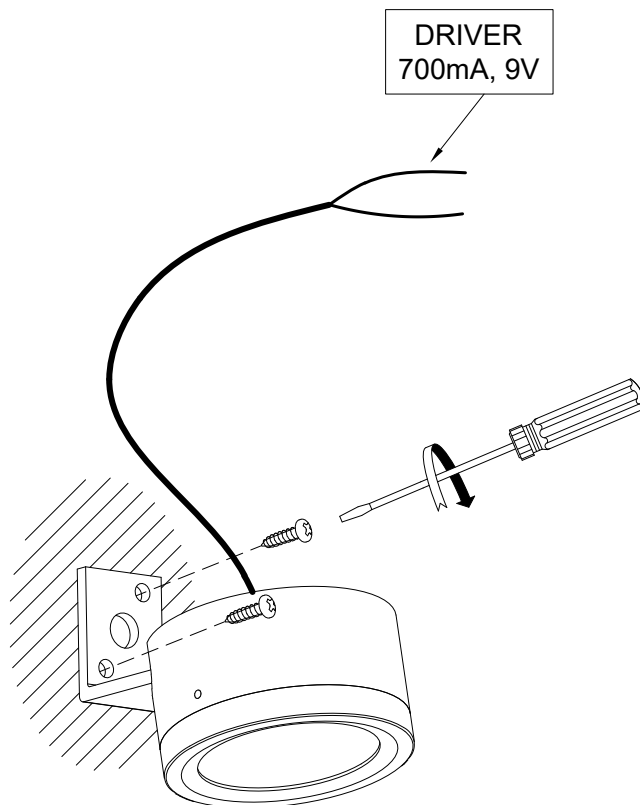

A- VISOR OPTION

